

Two-Unicast Wireless Networks: Characterizing the Degrees-of-Freedom

Ilan Shomorony and A. Salman Avestimehr

Abstract—We consider two-source two-destination (i.e., two-unicast) multi-hop wireless networks that have a layered structure with arbitrary connectivity. We show that, if the channel gains are chosen independently according to continuous distributions, then, with probability 1, two-unicast layered Gaussian networks can only have 1, $3/2$ or 2 sum degrees-of-freedom (unless both source-destination pairs are disconnected, in which case no degrees-of-freedom can be achieved). We provide sufficient and necessary conditions for each case based on network connectivity and a new notion of source-destination paths with manageable interference. Our achievability scheme is based on forwarding the received signals at all nodes, except for a small fraction of them in at most two *key layers*. Hence, we effectively create a “condensed network” that has at most four layers (including the sources layer and the destinations layer). We design the transmission strategies based on the structure of this condensed network. The converse results are obtained by developing information-theoretic inequalities that capture the structures of the network connectivity. Finally, we extend this result and characterize the full degrees-of-freedom region of two-unicast layered wireless networks.

I. INTRODUCTION

Characterizing network capacity is one of the central problems in network information theory. While this problem is in general unsolved, there has been considerable success in two research fronts. The first one focuses on single-flow multi-hop networks, in which one source aims to send the same message to one or more destinations, using multiple relay nodes. Since, in this scenario, all destination nodes are interested in the same message, there is effectively only one information stream in the network. Starting from the max-flow-min-cut theorem of Ford-Fulkerson [2], there has been significant progress on this problem. For wireline networks, the maximum multicast flow was characterized in [3]. In [4, 5], it was further shown that this maximum flow can be achieved using linear network codes.

In [6], the max-flow min-cut theorem was generalized for a class of linear deterministic networks with broadcast and interference. Inspired by this generalization, the multicast capacity of wireless networks was then characterized to within a gap

that does not depend on the channel gains [6], hence providing a constant-gap approximation of the capacity. Tighter capacity approximations were later derived in [7, 8].

The second research direction focuses on multi-flow wireless networks with only one-hop between the sources and the destinations, i.e., the interference channel. While the capacity of the interference channel remains unknown (except for special cases, such as [9–15]), there has been a variety of capacity approximations derived, such as constant-gap capacity approximations [16–18] and degrees-of-freedom characterizations [19–24].

However, once we go beyond single-hop, there is much less known about the capacity of multi-flow networks. Even in the simplest case with two sources and two destinations there are very few general results, such as [25], where the maximum flow in two-unicast undirected wireline networks is characterized. For two-unicast directed wireline networks, [26–28] have provided graph-theoretic and cut-set based conditions under which rate $(1, 1)$ can be achieved. In the wireless realm, constant-gap approximations of the capacity of specific two-hop networks (the ZZ and ZS networks) were obtained in [29]. Furthermore, it was recently shown that the network resulting from the concatenation of two or more *fully connected* interference channels (the XX structure) admits the maximum of two degrees-of-freedom [30]. The achievability scheme relies on the notion of real interference alignment, which was introduced in [22].

In this paper, we consider two-unicast multi-hop wireless networks that have a layered structure with *arbitrary connectivity*. We consider an AWGN channel model and assume that the channel gains (for each existing link) are independently drawn from a continuous distribution and remain fixed during the course of communication. Moreover, we assume that all channel gains are fully known at all nodes. Under these assumptions, we will show that, with probability 1 over the choice of the channel gains, two-unicast layered Gaussian networks can only have 1, $3/2$ or 2 sum degrees-of-freedom (unless the source-destination pairs are disconnected, in which case we have 0 degree-of-freedom). Furthermore, we will extend this result and show that there are only five possible degrees-of-freedom regions for two-unicast layered networks, and we will provide necessary and sufficient conditions for each case that are based only on properties of the network graph.

Paper outline and description of main contributions:

In Section II, we provide some basic definitions and state our main result. Then, in Section III, we give a high-level

The authors are with the School of Electrical and Computer Engineering, Cornell University, Ithaca, NY 14853 USA (e-mails: is256@cornell.edu, avestimehr@ece.cornell.edu).

The research of A. S. Avestimehr and I. Shomorony was supported in part by the NSF CAREER award 0953117, U.S. Air Force Young Investigator Program award FA9550-11-1-0064, NSF TRUST Center, and NSF Grants CCF-1144000 and CCF-1161720.

Manuscript received March 14, 2011; revised January 30, 2012. Date of current version August 5, 2012. Communicated by S. Jafar, Associate Editor for Communications.

This paper was presented in part at the International Symposium on Information Theory 2011, St. Petersburg, Russia [1]

description of the proof techniques and the intuition behind some of the arguments. We proceed to describing the networks in which only one degree-of-freedom can be achieved in Section IV. More specifically, if we let (s_1, d_1) and (s_2, d_2) be the pairs of corresponding source and destination, we will show that the maximum achievable degrees-of-freedom is one if and only if we are in one of the following two cases: (i) the network contains a node v whose removal disconnects pairs (s_1, d_1) , (s_2, d_2) and at least one of (s_1, d_2) and (s_2, d_1) ; or (ii) the network contains an edge (v_2, v_1) such that the removal of v_1 disconnects a destination from both sources and the removal of v_2 disconnects the non-corresponding source from both destinations. The conditions we present can be seen as a generalization of the graph-theoretic conditions given in [27] which characterize when a two-unicast wireline network does not support rate $(1, 1)$.

Then, in Section V, we consider the cases in which two degrees-of-freedom can be achieved. We will show that if our network graph contains a *Butterfly* or a *Grail* subgraph, then two degrees-of-freedom can be achieved. In order to describe the third class of networks which admit two degrees-of-freedom, we introduce the notion of *manageable interference*. We will say that two disjoint source-destination paths have manageable interference if, intuitively, all the interference between them can be either avoided or neutralized. Once again, it is interesting to compare the description of the networks with two degrees-of-freedom to the graph-theoretic description of the wireline networks which support rate $(1, 1)$. While in the wireline case it is possible to achieve rate $(1, 1)$ in networks which contain a Butterfly, a Grail or two edge-disjoint paths from each source to its corresponding destination (see [27, 28]), in the wireless case, it is possible to achieve two degrees-of-freedom in networks which contain a Butterfly, a Grail or two vertex-disjoint paths from each source to its destination that have manageable interference.

In order to describe general achievability schemes that work for an arbitrary number of layers, we propose a new method which involves building a *condensed* network, by identifying specific *key layers* which will perform non-trivial relaying operations. All the nodes which do not belong to the key layers will be assumed to simply forward their received signals at all times. Therefore, an effective transfer matrix between any pair of consecutive key layers can be obtained and it can be used to define the edges and the channel gains of our condensed network. To achieve two degrees-of-freedom, we will consider two distinct relaying schemes for the nodes in the key layers. If our condensed network is a $2 \times 2 \times 2$ interference channel, then we will resort to the real interference alignment schemes provided in [30]. Otherwise, we will show that a linear coding scheme will suffice to achieve the sum degrees-of-freedom. Notice that, since we assume single antennas at all nodes, the cut-set bound tells us that we cannot hope to achieve more than two degrees-of-freedom, and this case requires no converse proof.

In Section VI, we address all the networks which do not fall into the cases considered in Sections IV and V. We will show that they all have $3/2$ degrees-of-freedom. Our achievability scheme is based on defining two distinct modes

of operation for the network. During the first mode, specific nodes act as buffers, storing all the received signals in order to use them during the second mode of operation. Then, in the second mode, these stored signals can be either forwarded towards the destinations or used to neutralize the interference. This way, it is possible to achieve $3/2$ degrees-of-freedom by evenly dividing the amount of time the network operates in each mode. The converse result is obtained by finding information-theoretic inequalities which capture the fact that the interference, in this case, is not completely manageable.

In Section VII, we describe how the results regarding the sum degrees-of-freedom of two-unicast layered Gaussian networks can be extended to obtain the full degrees-of-freedom region. We show that there are only five possible degrees-of-freedom regions (assuming each source is connected to its destination) and we provide necessary and sufficient conditions for a network to have each of these regions. We do this by using the outer bound provided by the sum degrees-of-freedom and by describing achievability schemes for some specific extreme points in the degrees-of-freedom region, using real interference alignment.

Finally, in Section VIII, we provide some concluding remarks.

II. DEFINITIONS AND MAIN RESULTS

A *multiple-unicast Gaussian network* $\mathcal{N} = (G, L)$ consists of a directed graph $G = (V, E)$, where V is the vertex (or node) set and $E \subset V \times V$ is the edge set, and a set of source-destination pairs $L \subset V \times V$. We will focus on two-unicast (two-source two-destination) Gaussian networks, which means that $L = \{(s_1, d_1), (s_2, d_2)\}$, for distinct vertices s_1, s_2, d_1, d_2 . Moreover, we will assume that the network is *layered*, meaning that the vertex set V can be partitioned into r subsets $V_1, V_2, \dots, V_r$ (called layers) in such a way that $E \subset \bigcup_{i=1}^{r-1} V_i \times V_{i+1}$, and $V_1 = \{s_1, s_2\}$, $V_r = \{d_1, d_2\}$. For a vertex $v \in V_j$, we will let $\mathcal{I}(v) \triangleq \{u \in V_{j-1} : (u, v) \in E\}$ (the input nodes) and $\mathcal{O}(v) \triangleq \{u \in V_{j+1} : (v, u) \in E\}$ (the output nodes). Furthermore, we will let $\ell(v)$ be the index corresponding to the layer containing v , i.e., $v \in V_{\ell(v)}$. Notice that the layers induce a natural ordering of the nodes. Thus, we may say, for example, that v_a occurs before v_b if $\ell(v_a) < \ell(v_b)$.

A real-valued channel gain h_e is associated with each edge $e \in E$. Since we will often be referring to vertices by v_i , for $i \in \mathbb{N}$, we will also use $h_{i,j}$ to represent the channel gain associated with edge (v_i, v_j) . We will assume that the channel coefficients h_e are independently drawn from continuous distributions and are fixed during the course of communication. We also assume that all channel gains are fully known at all nodes. At time m , each node v_i (with the exception of d_1 and d_2) transmits a real-valued signal $X_{v_i}[m]$ (or simply $X_i[m]$, when there is no ambiguity), which must satisfy an average power constraint $\frac{1}{n} \sum_{m=1}^n E[X_i^2[m]] \leq P$, $\forall v_i \in V$, for a communication session of duration n , where the expectation is taken with respect to any possible randomization involved.

The signal received by node v_j at time m is given by

$$Y_j[m] = \sum_{v_i \in \mathcal{I}(v_j)} h_{i,j} X_i[m] + N_j[m], \text{ for } m = 1, 2, \dots,$$

where $N_j[m]$ is the zero mean unit variance Gaussian discrete-time white noise process associated with node v_j . The transmitted signal from node v_j (with the exception of s_1 and s_2) at time m must be a (possibly randomized) function of its past received signals $Y_j[k]$, for $k = 1, \dots, m-1$. Source s_i picks a message W_i that it wishes to communicate to d_i , and transmits signals $X_{s_i}[m]$, $m = 1, \dots, n$, which are a function of W_i , for $i = 1, 2$. Each destination uses a decoder, which is a mapping $g_i : \mathbb{R}^n \rightarrow \{1, \dots, |W_i|\}$ from the n received signals to the source message indices ($|W_i|$ is the number of messages that can be chosen). We say that rates $R_i \triangleq \frac{\log |W_i|}{n}$ for $i = 1, 2$ are achievable if the probability of error in the decoding of both messages by their corresponding destinations can be made arbitrarily close to 0 by choosing a sufficiently large n . The sum-capacity $C_\Sigma(P)$ is the supremum of the achievable sum-rates for power constraint P .

Definition 1. The sum degrees-of-freedom D_Σ of a two-unicast Gaussian network is defined as

$$D_\Sigma \triangleq \lim_{P \rightarrow \infty} \frac{C_\Sigma(P)}{\frac{1}{2} \log P}.$$

Remark: D_Σ will in general depend on $H = \{h_e : e \in E\}$. However, we will show that with probability 1, D_Σ only depends on the network graph G , and not on the values of H .

We now consider several definitions which will be used throughout the paper.

Definition 2. A (directed) path between $v_1 \in V$ and $v_k \in V$ is an ordered set of nodes $\{v_1, v_2, \dots, v_k\}$ such that $(v_i, v_{i+1}) \in E$ for $i = 1, \dots, k-1$. We will commonly refer to a path between v_1 and v_k by P_{v_1, v_k} . We write $v_1 \rightsquigarrow v_k$, if there is a path between v_1 and v_k . Notice that for any node $v \in V$, $v \rightsquigarrow v$.

For simplicity, we will assume that any $v \in V$ belongs to at least one path P_{s_i, d_j} for $i \in \{1, 2\}$ and $j \in \{1, 2\}$. This is reasonable since a node that does not belong to any source-destination path does not alter the achievable rates in the network and can be removed. Moreover, we will always assume that $s_i \rightsquigarrow d_i$ for $i = 1, 2$, since $s_i \not\rightsquigarrow d_i$ implies that $R_i = 0$. In order to be able to “cut and paste” path segments we will also consider the following path operations. For a path $P_{v_a, v_b} = \{v_a, v_{a+1}, \dots, v_b\}$, we will let $P_{v_a, v_b}[v_c, v_d] = \{v_c, v_{c+1}, \dots, v_d\}$ if $a \leq c \leq d \leq b$. Moreover, if we have paths P_{v_e, v_f} and P_{v_f, v_g} , we will let $P_{v_e, v_f} \oplus P_{v_f, v_g}$ be the path which results from concatenating P_{v_e, v_f} and P_{v_f, v_g} .

Definition 3. Paths P_{v_a, v_b} and P_{v_c, v_d} are said to be disjoint if $P_{v_a, v_b} \cap P_{v_c, v_d} = \emptyset$. (Notice that such paths are usually called vertex-disjoint, but here we will refer to them as simply disjoint)

Definition 4. For a subset of the vertices $S \subset V$, we say that $G[S]$ is the graph induced by S on G , if $G[S] = (S, E_s)$, where $E_s = \{(v_i, v_j) \in E : v_i, v_j \in S\}$.

Definition 5. We say that $\mathcal{N}' = (G', L')$ is a subnetwork of $\mathcal{N} = (G, L)$, if $G' = G[S]$, for some $S \subset V$ such that $L \subset S \times S$, and $L' = L$.

For the next definitions, we assume we have two disjoint paths P_{s_1, d_1} and P_{s_2, d_2} . Since we will often make statements which work for both P_{s_1, d_1} and P_{s_2, d_2} , we will let $\bar{i} = 2$ if $i = 1$ and $\bar{i} = 1$ if $i = 2$.

Definition 6. We will say that a node $v_a \notin P_{s_i, d_i}$ causes interference on P_{s_i, d_i} and write $v_a \xrightarrow{I} P_{s_i, d_i}$, if we can find a node $v_b \in P_{s_i, d_i}$ such that $(v_a, v_b) \in E$ and a path $P_{s_{\bar{i}}, v_a}$ between $s_{\bar{i}}$ and v_a such that $P_{s_{\bar{i}}, v_a} \cap P_{s_i, d_i} = \emptyset$, for $i = 1, 2$. Moreover, we will say the interference is direct, and write $v_a \xrightarrow{I} P_{s_i, d_i}$, if, in addition, $v_a \in P_{s_{\bar{i}}, d_{\bar{i}}}$. Otherwise, we call the interference indirect.

Consider a subnetwork $(G[S], \{(s_1, d_1), (s_2, d_2)\})$ for some $S \supset (P_{s_1, d_1} \cup P_{s_2, d_2})$. We will define $n_i(G[S], P_{s_i, d_i}) \triangleq |\{v \in S : v \xrightarrow{I} P_{s_i, d_i}\}|$, for $i = 1, 2$. Notice that, in the definition of n_i , the path implied by $v \xrightarrow{I} P_{s_i, d_i}$ must exist in the subnetwork with graph $G[S]$. Moreover, we define $n_i^D(P_{s_{\bar{i}}, d_{\bar{i}}}, P_{s_i, d_i}) \triangleq |\{v \in V : v \xrightarrow{I} P_{s_i, d_i}\}|$. When there is no ambiguity in the choice of our two disjoint paths P_{s_1, d_1} and P_{s_2, d_2} , we will simplify the notation by using $n_i(G[S])$ and n_i^D .

Definition 7. Two disjoint paths P_{s_1, d_1} and P_{s_2, d_2} have manageable interference if we can find $S \subset V$ such that $P_{s_1, d_1}, P_{s_2, d_2} \subset S$, $n_1(G[S]) \neq 1$ and $n_2(G[S]) \neq 1$.

The following example illustrates the definitions above.

Example 1. Consider the network depicted in Figure 1. We have two disjoint paths from each source to its corre-

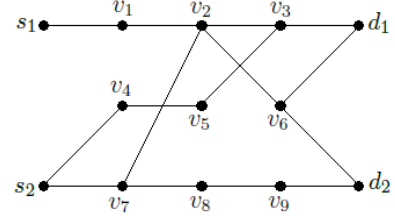


Fig. 1. Two-unicast layered network considered in Example 1.

sponding destination, given by $P_{s_1, d_1} = \{s_1, v_1, v_2, v_3, d_1\}$ and $P_{s_2, d_2} = \{s_2, v_7, v_8, v_9, d_2\}$. If we consider the entire network $\mathcal{N} = (G, L)$, then we have that $v_5 \xrightarrow{I} P_{s_1, d_1}$ (since we have a path $P_{s_2, v_5} = \{s_2, v_4, v_5\}$ disjoint from P_{s_1, d_1}) and $v_7 \xrightarrow{I} P_{s_1, d_1}$ (since we have a path $P_{s_2, v_7} = \{s_2, v_7\}$ disjoint from P_{s_1, d_1} and $v_7 \in P_{s_2, d_2}$). Similarly, we have that $v_6 \xrightarrow{I} P_{s_2, d_2}$. Thus, we conclude that $n_1^D(P_{s_2, d_2}, P_{s_1, d_1}) = 1$, $n_2^D(P_{s_1, d_1}, P_{s_2, d_2}) = 0$, $n_1(G, P_{s_1, d_1}) = 2$ and $n_2(G, P_{s_2, d_2}) = 1$. If instead we consider the subnetwork $\mathcal{N} = (G[S], L)$, where $S = P_{s_1, d_1} \cup P_{s_2, d_2}$, we have $n_1(G[S], P_{s_1, d_1}) = n_1^D(P_{s_2, d_2}, P_{s_1, d_1}) = 1$ and $n_2(G[S], P_{s_2, d_2}) = n_2^D(P_{s_1, d_1}, P_{s_2, d_2}) = 0$. Finally, we consider the subnetwork $\mathcal{N} = (G[S'], L)$, where $S' = V \setminus \{v_6\}$.

Then we have $n_1(G[S'], P_{s_1, d_1}) = 2$ and $n_2(G[S'], P_{s_2, d_2}) = 0$, and we conclude that P_{s_1, d_1} and P_{s_2, d_2} have manageable interference.

Now we state our main results.

Theorem 1. *For a two-unicast layered Gaussian network $\mathcal{N} = (G = (V, E), \{(s_1, d_1), (s_2, d_2)\})$, where the channel gains are independently drawn from continuous distributions, with probability 1, the sum degrees-of-freedom of $\mathcal{N}$, D_Σ , are given by*

- A) $D_\Sigma = 1$ if $\mathcal{N}$ contains a node v whose removal disconnects d_i from both sources and s_i from both destinations, for $i = 1$ or $i = 2$,
- A') $D_\Sigma = 1$ if $\mathcal{N}$ contains an edge $(v_2, v_1) \in E$ such that the removal of v_1 disconnects d_i from both sources and the removal of v_2 disconnects s_i from both destinations, for $i = 1$ or $i = 2$,
- B) $D_\Sigma = 2$ if $\mathcal{N}$ contains two disjoint paths P_{s_1, d_1} and P_{s_2, d_2} with manageable interference (see Definition 7),
- B') $D_\Sigma = 2$ if $\mathcal{N}$ or any subnetwork does not contain two disjoint paths P_{s_1, d_1} and P_{s_2, d_2} , but does not fall into case (A),
- C) $D_\Sigma = \frac{3}{2}$ in all other cases.

We also characterize the full degrees-of-freedom region of two-unicast layered Gaussian networks. We first define some basic notions.

Definition 8. *The capacity region $\mathcal{C}(P)$ of a two-unicast Gaussian wireless network $\mathcal{N}$ with power constraint P is the closure of the set of all pairs of achievable rates (R_1, R_2) .*

Definition 9. *The degrees-of-freedom region of a two-unicast Gaussian network $\mathcal{N}$ is given by*

$$\mathcal{D} = \left\{ (D_1, D_2) \in \mathbb{R}_+^2 : \forall w_1, w_2 \in \mathbb{R}_+, w_1 D_1 + w_2 D_2 \leq \lim_{P \rightarrow \infty} \left(\sup_{(R_1, R_2) \in \mathcal{C}(P)} \frac{w_1 R_1 + w_2 R_2}{\frac{1}{2} \log P} \right) \right\}. \quad (1)$$

In order to simplify the characterization of the networks according to their degrees-of-freedom regions, we also consider the following definition.

Definition 10. *Two disjoint paths P_{s_1, d_1} and P_{s_2, d_2} have (s_i, d_i) -manageable interference if we can find $S \subset V$ such that $P_{s_1, d_1}, P_{s_2, d_2} \subset S$, $n_i(G[S]) \neq 1$, for $i = 1$ or 2 .*

For the degrees-of-freedom region of two-unicast Gaussian networks, we have the following result.

Theorem 2. *For a two-unicast layered Gaussian network $\mathcal{N} = (G = (V, E), \{(s_1, d_1), (s_2, d_2)\})$, where the channel gains are chosen according to independent continuous distributions, with probability 1, the degrees-of-freedom region $\mathcal{D}$ is given by*

- I. $\mathcal{D} = \{(D_1, D_2) \in \mathbb{R}_+^2 : D_1 + D_2 \leq 1\}$ if $\mathcal{N}$ falls in cases (A) or (A') in Theorem 1,
- II. $\mathcal{D} = \{(D_1, D_2) \in \mathbb{R}_+^2 : D_1 \leq 1, D_2 \leq 1\}$ if $\mathcal{N}$ falls in cases (B) or (B') in Theorem 1,

- III. $\mathcal{D} = \{(D_1, D_2) \in \mathbb{R}_+^2 : D_1 \leq 1, D_2 \leq 1, D_1 + D_2 \leq \frac{3}{2}\}$ if $\mathcal{N}$ is not in cases I, II and contains disjoint paths P_{s_1, d_1} and P_{s_2, d_2} whose interference is (s_1, d_1) and (s_2, d_2) -manageable,
- IV. $\mathcal{D} = \{(D_1, D_2) \in \mathbb{R}_+^2 : D_1 \leq 1, D_1 + 2D_2 \leq 2\}$ if $\mathcal{N}$ is not in cases I, II and III and contains paths Q_{s_1, d_1} , Z_{s_1, d_1} and P_{s_2, d_2} , such that Q_{s_1, d_1} and P_{s_2, d_2} are disjoint and have (s_1, d_1) -manageable interference, and Z_{s_1, d_1} and P_{s_2, d_2} are disjoint and have (s_2, d_2) -manageable interference,
- V. $\mathcal{D} = \{(D_1, D_2) \in \mathbb{R}_+^2 : D_2 \leq 1, 2D_1 + D_2 \leq 2\}$ if $\mathcal{N}$ is not in cases I, II and III and contains paths P_{s_1, d_1} , Q_{s_2, d_2} and Z_{s_2, d_2} , such that Q_{s_2, d_2} and P_{s_1, d_1} are disjoint and have (s_1, d_1) -manageable interference, and Z_{s_2, d_2} and P_{s_1, d_1} are disjoint and have (s_2, d_2) -manageable interference.

Moreover, any two-unicast layered Gaussian network $\mathcal{N}$ falls into one of the cases described above. These five regions are depicted in Figure 2.

III. PROOF OVERVIEW

Even though Theorem 1 can be seen as a simple consequence of Theorem 2, we will first prove Theorem 1. Theorem 2 will then follow as an extension of it. We will consider cases (A), (A'), (B), (B') and (C) sequentially. The intuition behind (A) is as follows. Let W_1 be the message from s_1 and W_2 be the message from s_2 . If the removal of v disconnects d_1 from both sources, then by knowing the received signal at v we should be able to decode W_1 . Then, since v also disconnects d_2 from s_2 , loosely speaking, all the information about W_2 goes through v . Therefore, v can use the knowledge about W_1 to remove any interference due to signals about W_1 , thus being able to decode W_2 as well. Since a single node can decode both messages, we have that $D_\Sigma \leq 1$, and it follows that $D_\Sigma = 1$, since 1 degree-of-freedom is trivially achievable from the fact that $s_1 \rightsquigarrow d_1$ and $s_2 \rightsquigarrow d_2$. The intuition behind

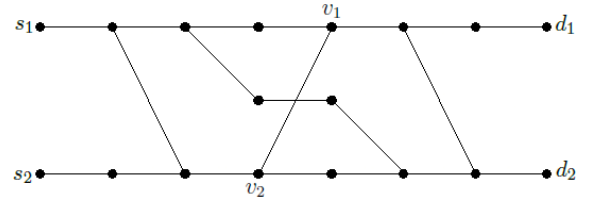


Fig. 3. An example of a network in case (A').

(A') is similar. If the removal of v_1 disconnects d_1 from both sources, then by knowing the received signal at v_1 we should be able to decode W_1 . Since the removal of v_2 disconnects s_2 from both terminals, all the information regarding W_2 goes through v_2 . This means that all the information received at v_1 which does not come from v_2 is about W_1 and, thus, by knowing the received signal at v_1 , one can remove the part regarding W_1 and obtain the part of the transmitted signal at v_2 regarding W_2 . But this implies that from v_1 we should be able to decode both W_1 and W_2 , which implies $D_\Sigma \leq 1$.

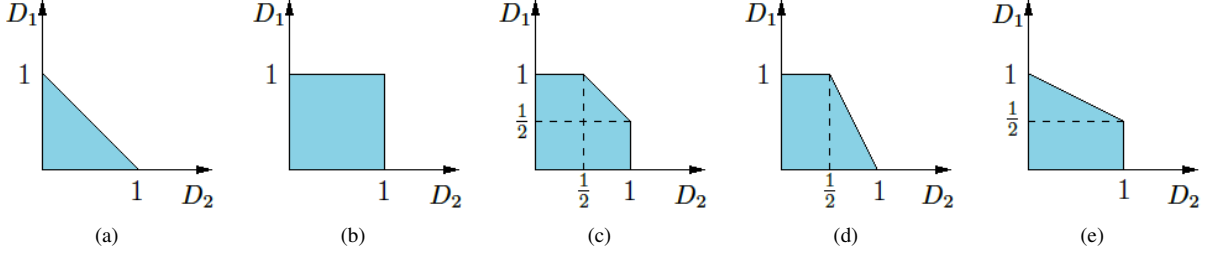


Fig. 2. Degrees-of-freedom region for networks in case I (a); case II (b); case III (c); case IV (d); case V (e).

An example of a network that would fall in (A') is shown in Figure 3.

To prove (B) and (B'), we will provide several achievability schemes for 2 degrees-of-freedom. For networks in (B), i.e., networks which contain two disjoint paths with manageable interference, depending on the network topology, we will either consider simple amplify-and-forward schemes or schemes based on real interference alignment, as described in [30]. If the network is in (B'), we will first restrict ourselves to the subnetwork which satisfies the description in (B'). Then, we will use a result from the double unicast problem for wireline networks to claim that the subnetwork must contain one of the three structures shown in Figure 4. But since we are assuming that the subnetwork has no two disjoint paths, we must have either the structure in Figure 4b or the structure in Figure 4c. We provide an amplify-and-forward achievability scheme in each case.

For case (C), we only need to consider networks which have two disjoint paths P_{s_1, d_1} and P_{s_2, d_2} , but do not have two disjoint paths with manageable interference. This is because all networks which do not contain two disjoint paths P_{s_1, d_1} and P_{s_2, d_2} must fall into (A) or (B'). Moreover, any network that has two disjoint paths with manageable interference will fall into (B). We will identify two main classes of networks in (C), depicted in Figure 5, and for each of these classes we will first provide an achievability scheme, based on two separate modes of operation for the network, which achieves $\frac{3}{2}$ degrees-of-freedom. Then, we will show that the non-existence of two disjoint paths with manageable interference implies that either the network falls into (B') or $D_\Sigma \leq \frac{3}{2}$.

We will then build upon the result from Theorem 1 to obtain Theorem 2. For networks in cases (A), (A'), (B) and (B'), we will notice that the degrees-of-freedom region can be readily obtained from the sum degrees-of-freedom. For networks in case (C), we use the fact that they must contain two

disjoint paths that do not have manageable interference to infer properties about the network connectivity. Then, we combine the outer bound provided by the sum degrees-of-freedom with achievability schemes for the extreme points to characterize the degrees-of-freedom region. Some of the extreme points will require the use of real interference alignment schemes.

IV. NETWORKS WITH ONLY ONE DEGREE-OF-FREEDOM

In this section, we will provide converse results for networks that fall in cases (A) and (A'). For the converse proofs, necessary for (A), (A') and (C), we will derive information inequalities which allow us to bound the achievable sum-rates, and thus the degrees-of-freedom. We start by considering (A), and we assume WLOG that we have a node v whose removal disconnects d_1 from both sources and s_2 from both destinations. We assume that the communication session lasts n time steps, and for a node $v_j \in V$, we let X_j^n , Y_j^n and N_j^n be length n vectors whose entries are, respectively, the transmitted signals $X_j[1], \dots, X_j[n]$, the received signals $Y_j[1], \dots, Y_j[n]$ and the noise terms $N_j[1], \dots, N_j[n]$. For a set of nodes S , we will define X_S to be the set of all X_i 's, for $v_i \in S$. Then, if we have X_S^n , we have a set of length n vectors. We let W_1 and W_2 be independent random variables corresponding to uniform choices over the messages on sources s_1 and s_2 respectively. Then we have

$$\begin{aligned} nR_1 &= H(W_1) = I(W_1; Y_{d_1}^n) + H(W_1 | Y_{d_1}^n) \\ &\stackrel{(i)}{\leq} I(W_1; Y_{d_1}^n) + n\epsilon_n \stackrel{(ii)}{\leq} I(X_{s_1}^n; Y_v^n) + n\epsilon_n \end{aligned} \quad (2)$$

where (i) follows from Fano's inequality, where $\epsilon_n \rightarrow 0$ as $n \rightarrow \infty$; and (ii) follows because the removal of v disconnects d_1 from both sources; thus we have $W_1 \leftrightarrow X_{s_1}^n \leftrightarrow Y_v^n \leftrightarrow Y_{d_1}^n$.

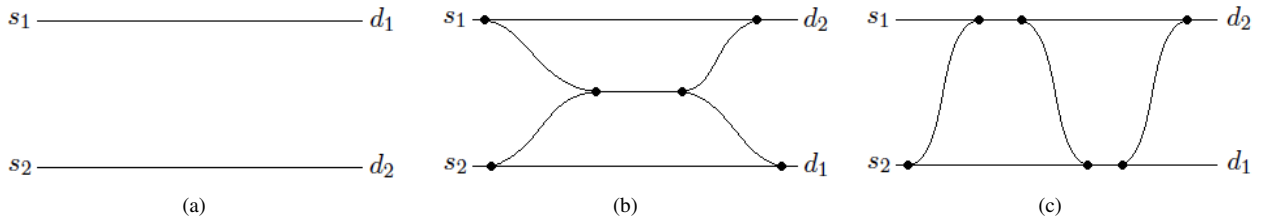


Fig. 4. Three categories of networks which are not in case (A). Notice that not all nodes are explicitly shown for the sake of generality. Each line represents a path, not necessarily a link, with any number of nodes.

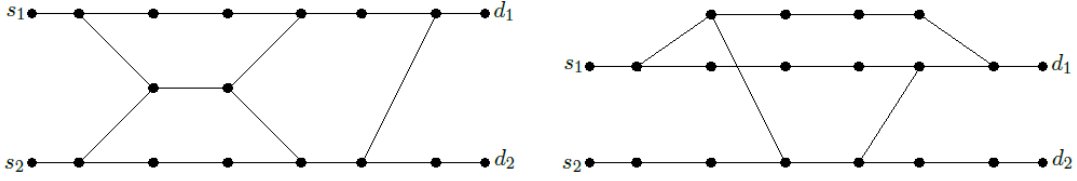


Fig. 5. Examples of the two classes of networks in case (C).

For R_2 , we have

$$\begin{aligned} nR_2 &= H(W_2) = I(W_2; Y_{d_2}^n) + H(W_2 | Y_{d_2}^n) \\ &\leq I(W_2; Y_{d_2}^n) + n\epsilon_n \stackrel{(i)}{\leq} I(X_{s_2}^n; Y_v^n, X_{s_1}^n) + n\epsilon_n \\ &\stackrel{(ii)}{\leq} I(X_{s_2}^n; Y_v^n | X_{s_1}^n) + n\epsilon_n \end{aligned} \quad (3)$$

where (i) follows because the removal of v disconnects d_2 from s_2 , and, as a consequence, the removal of v and s_1 disconnects d_2 from both sources, and we have $W_2 \leftrightarrow X_{s_2}^n \leftrightarrow (Y_v^n, X_{s_1}^n) \leftrightarrow Y_{d_2}^n$; and (ii) follows since $X_{s_1}^n$ is independent of $X_{s_2}^n$. Now, by adding inequalities (2) and (3), we obtain

$$\begin{aligned} n(R_1 + R_2) &= I(X_{s_1}^n; Y_v^n) + I(X_{s_2}^n; Y_v^n | X_{s_1}^n) + n\epsilon_n \\ &= I(X_{s_1}^n, X_{s_2}^n; Y_v^n) + n\epsilon_n \\ &= h(Y_v^n) - h(Y_v^n | X_{s_1}^n, X_{s_2}^n) + n\epsilon_n \\ &\leq h(Y_v^n) - h(Y_v^n | X_{s_1}^n, X_{s_2}^n, X_{\mathcal{I}(v)}^n) + n\epsilon_n \\ &\leq h(Y_v^n) - h(N_v^n) + n\epsilon_n \\ &\leq \frac{n}{2} \log \left(1 + \left(\sum_{u \in \mathcal{I}(v)} |h_{u,v}| \right)^2 P \right) \\ &\quad - \frac{n}{2} \log(2\pi e) + n\epsilon_n \\ &= \frac{n}{2} \log \left(\frac{1 + \left(\sum_{u \in \mathcal{I}(v)} |h_{u,v}| \right)^2 P}{2\pi e} \right) \\ &\quad + n\epsilon_n \leq \frac{n}{2} \log(\beta P) + n\epsilon_n, \end{aligned} \quad (4)$$

where β is a constant which does not depend on P , for P sufficiently large. Therefore we conclude that

$$D_\Sigma \leq \lim_{P \rightarrow \infty} \lim_{n \rightarrow \infty} \frac{\log(\beta P) + 2\epsilon_n}{\log P} = 1.$$

In order to simplify the converse proofs for (A') and (C), we will consider a decomposition of the additive Gaussian noise N_j associated with each node v_j . More specifically, if $m = |\mathcal{I}(v_j)|$, we break the noise at node v_j into m independent noise components, each with variance $1/m$. Then we associate each of these components with one of the incoming edges, and we can define, for $v_i \in \mathcal{I}(v_j)$,

$$\tilde{X}_{i,j} \triangleq h_{i,j} X_i + N_{i,j},$$

where $N_{i,j}$ is the noise term associated with the edge (v_i, v_j) . Clearly, we have $N_j = \sum_{i: v_i \in \mathcal{I}(v_j)} N_{i,j}$, and N_j has unit variance. Notice that we can now write, for a node v_j , $Y_j = \sum_{i: v_i \in \mathcal{I}(v_j)} \tilde{X}_{i,j}$. Moreover, we will define

$$\tilde{X}_i \triangleq \{\tilde{X}_{i,j} : j \text{ s.t. } v_j \in \mathcal{O}(v_i)\}.$$

As before, we let $\tilde{X}_S$ be the set of all $\tilde{X}_i$'s, for $v_i \in S$, and $\tilde{X}_i^n$ be a length n vector with all the $\tilde{X}_i[m]$'s, for $m = 1, \dots, n$.

In order to find upper bounds to the rates, we will often be interested in showing that certain conditional mutual information terms can be upper bounded by a constant. In particular, if we have a Z structure across two layers in the network, such as the one shown in Figure 6a, we would like to say that $I(X_c^n; \tilde{X}_c^n | Y_b^n, \tilde{X}_a^n)$ can be upper bounded by a constant that does not depend on P . Intuitively, the reason

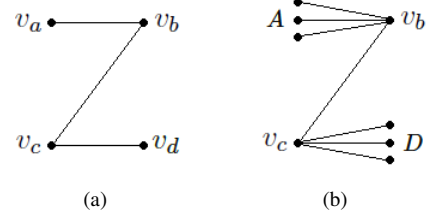


Fig. 6. The Z structure.

is that, given $\tilde{X}_a^n$ and Y_b^n , one can subtract $\tilde{X}_{a,b}^n$ from Y_b^n and obtain $\tilde{X}_{c,b}^n$. This means that “almost all” information in $\tilde{X}_c^n$ can be deduced from $(Y_b^n, \tilde{X}_a^n)$, and thus the conditional mutual information cannot be very large. This reasoning is formalized in the following lemma, where we generalize the Z structure to one where $|\mathcal{I}(v_b)| \geq 2$ and $|\mathcal{O}(v_c)| \geq 2$, as shown in Figure 6b. Moreover, we generalize this notion to the case where the mutual information may be conditioned on other signals as well, provided that these signals do not contain information about $N_{c,d}^n$, for some $v_d \in D$. The proof can be found in Appendix A.

Lemma 1. Suppose we have nodes v_b and v_c such that $(v_c, v_b) \in E$, and let $A = \mathcal{I}(v_b) \setminus \{v_c\}$ and $D = \mathcal{O}(v_c) \setminus \{v_b\}$. Suppose, in addition, that we have a set of nodes S such that, if $u \in \mathcal{O}(v_c)$ and $w \in S$, we have $u \not\sim w$, and a set of nodes T with the property that, if $u \in D$ and $w \in T$, then $u \not\sim w$. Then, we have

$$I(X_S^n; \tilde{X}_c^n | Y_b^n, \tilde{X}_A^n, X_T^n) \leq nK,$$

where K is a constant that is only a function of the channel gains and the network graph G .

Remarks: If, in the statement of Lemma 1, we condition the mutual information on $\tilde{X}_T^n$ instead of X_T^n the same result holds. Also, if instead of conditioning on $\tilde{X}_A^n$ and Y_b^n we condition on $\tilde{X}_{c,b}^n$, the same result holds, since, in the proof, we use $\tilde{X}_A^n$ and Y_b^n to construct $\tilde{X}_{c,b}^n$. We will consider these cases to be covered by Lemma 1 as well.

We can now proceed to the proof of case (A') in Theorem 1. We assume WLOG that we have an edge $(v_2, v_1) \in E$ such that the removal of v_1 disconnects d_1 from both sources and the removal of v_2 disconnects s_2 from both destinations. We let $A \triangleq \{v \in V : s_2 \not\rightsquigarrow v\}$, and we notice that $\mathcal{I}(v_1) \setminus \{v_2\} \subset A$, since, otherwise, we would have a node $v_a \in \mathcal{I}(v_1) \setminus \{v_2\}$ such that $s_2 \rightsquigarrow v_a$, and this would contradict the fact that the removal of v_2 disconnects s_2 from d_1 . Moreover, $v_2 \notin A$, because all paths from s_2 to d_2 contain v_2 and we must have at least one such path. Thus we have

$$\begin{aligned} nR_1 &\leq I(W_1; Y_{d_1}^n) + n\epsilon_n \stackrel{(i)}{\leq} I(\tilde{X}_A^n; Y_1^n) + n\epsilon_n \\ &= I(\tilde{X}_A^n, X_2^n; Y_1^n) - I(X_2^n; Y_1^n | \tilde{X}_A^n) + n\epsilon_n \\ &\stackrel{(ii)}{\leq} \frac{n}{2} \log P + nK_1 - I(X_2^n; Y_1^n | \tilde{X}_A^n) + n\epsilon_n, \end{aligned} \quad (5)$$

where (i) follows because v_1 disconnects d_1 from both sources and $s_1 \in A$, thus we have $W_1 \leftrightarrow \tilde{X}_A^n \leftrightarrow Y_1^n \leftrightarrow Y_{d_1}^n$; and (ii) follows because $\mathcal{I}(v_1) \setminus \{v_2\} \subset A$ and $v_2 \notin A$, hence we can upper-bound $I(\tilde{X}_A^n, X_2^n; Y_1^n)$ as

$$\begin{aligned} I(\tilde{X}_A^n, X_2^n; Y_1^n) &= h(Y_1^n) - h(Y_1^n | \tilde{X}_A^n, X_2^n) \\ &= h(Y_1^n) - h(N_{2,1}^n) \\ &\leq \frac{n}{2} \log \left(\frac{1 + \left(\sum_{u \in \mathcal{I}(v_1)} |h_{u,v_1}| \right)^2 P}{2\pi e / |\mathcal{I}(v_1)|} \right) \\ &\leq \frac{n}{2} \log(\gamma P) \leq \frac{n}{2} \log P + nK_1, \end{aligned} \quad (6)$$

where γ and K_1 are constants which are independent of P , for sufficiently large P .

Next we notice that, since the removal of v_2 disconnects d_2 from s_2 and the removal of A disconnects d_2 from s_1 , the removal of v_2 and A disconnects d_2 from both sources. Thus we have

$$\begin{aligned} nR_2 &\leq I(W_2; Y_{d_2}^n) + n\epsilon_n \stackrel{(i)}{\leq} I(W_2; \tilde{X}_2^n, \tilde{X}_A^n) + n\epsilon_n \\ &\stackrel{(ii)}{=} I(W_2; \tilde{X}_2^n | \tilde{X}_A^n) + n\epsilon_n \\ &\stackrel{(iii)}{\leq} I(X_2^n; \tilde{X}_2^n | \tilde{X}_A^n) + n\epsilon_n \\ &\leq I(X_2^n; \tilde{X}_2^n, Y_1^n | \tilde{X}_A^n) + n\epsilon_n \\ &= I(X_2^n; Y_1^n | \tilde{X}_A^n) + I(X_2^n; \tilde{X}_2^n | \tilde{X}_A^n, Y_1^n) + n\epsilon_n \\ &\stackrel{(iv)}{\leq} I(X_2^n; Y_1^n | \tilde{X}_A^n) + nK_2 + n\epsilon_n, \end{aligned} \quad (7)$$

where (i) follows from the fact that the removal of v_2 and A disconnects d_2 from both sources, which implies $W_2 \leftrightarrow (\tilde{X}_2^n, \tilde{X}_A^n) \leftrightarrow Y_{d_2}^n$; (ii) follows from the fact that W_2 is independent of $\tilde{X}_A^n$; (iii) follows from the fact that, given $\tilde{X}_A^n$, we have $W_2 \leftrightarrow \tilde{X}_2^n \leftrightarrow \tilde{X}_A^n$; (iv) follows from the application of Lemma 1 to $I(X_2^n; \tilde{X}_2^n | \tilde{X}_A^n, Y_1^n)$, since $\mathcal{I}(v_1) \setminus \{v_2\} \subset A$. Finally, by adding (5) and (7) we obtain

$$n(R_1 + R_2) \leq \frac{n}{2} \log P + n(K_1 + K_2) + n\epsilon_n,$$

and we conclude that $D_\Sigma \leq 1$. Since one degree-of-freedom is trivially achievable, we have $D_\Sigma = 1$ for both (A) and (A').

V. NETWORKS WITH TWO DEGREES-OF-FREEDOM

In this section, we will provide achievability schemes for the networks which fall into cases (B) and (B'). In order to describe these schemes we will proceed as follows. We will first identify the *key layers*, whose nodes will be responsible for performing non-trivial relaying operations. All the nodes which do not belong to the key layers will simply forward their received signal. This will allow us to build a *condensed* version of the network. The condensed network only contains the nodes in the key layers, V_l and V_r . The edges and respective channel gains are determined according to the effective transfer matrices between two consecutive layers of the condensed network, which are obtained by assuming that all intermediate nodes which are not in the key layers, V_l or V_r are simply forwarding their received signals. An example is shown in Figure 7.

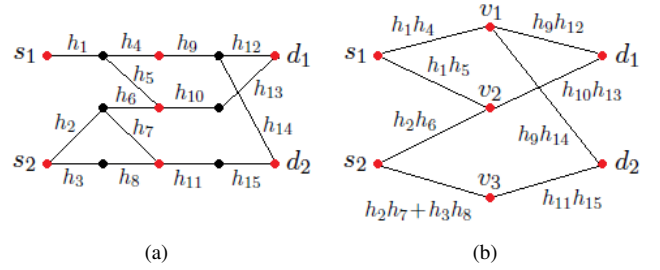


Fig. 7. A 5-layer network (a) and its 3-layer condensed version (b)

We will refer to the effective channel gains of the edges in the condensed network by $\hat{h}(v, u)$, where v is the starting node and u is the ending node. For example, in Figure 7, we have $\hat{h}(s_2, v_3) = h_2 h_7 + h_3 h_8$ and $\hat{h}(v_2, d_2) = 0$. Notice that, in the condensed network, the effective additive noises at the nodes are not necessarily independent and identically distributed. However, they are still drawn from continuous distributions, which will be sufficient for us.

The condensed networks will be useful since we will conclude that entire classes of layered networks will possess essentially the same condensed network, and therefore we may describe a single achievability scheme for all the networks in that class. We will describe achievability schemes for $D_\Sigma = 2$ in essentially two ways, according to the structure of the condensed network. If the resulting condensed network is a $2 \times 2 \times 2$ interference channel, then we will use the scheme described in [30] to achieve $D_\Sigma = 2$. Otherwise, we will describe a simple amplify-and-forward scheme that guarantees that the end-to-end transfer matrix for the condensed network (and thus for the original network as well) is of the form

$$\begin{bmatrix} \beta_1 & 0 \\ 0 & \beta_2 \end{bmatrix},$$

for $\beta_1, \beta_2 \neq 0$. Thus we have $Y_{d_i} = \beta_i X_{s_i} + N_{d_i}^{\text{eff}}$, for $i = 1, 2$, where $N_{d_i}^{\text{eff}}$ is the effective additive noise at d_i . Since the scaling factors used at the key layers and the noise variances are functions of the channel gains only (and not the power P of the signals transmitted by the sources), we have essentially two parallel point-to-point AWGN channels.

In order to make sure that the output power constraint is satisfied at all nodes, we will restrict the sources to using power αP , for some $\alpha \in (0, 1)$. It is not difficult to see that, for P sufficiently large, α can be chosen independent of P . The effective additive noises at the destinations will be linear combinations of the individual Gaussian noises at each node, where the coefficients are functions of the channel gains h_e . Therefore, σ_i^2 , the variance of the additive Gaussian noise at destination d_i , is not a function of P , and each source-destination pair (s_i, d_i) , for $i = 1, 2$, can use Gaussian random codes to achieve rate

$$R_i = \frac{1}{2} \log \left(1 + \frac{\alpha \beta_i^2 P}{\sigma_i^2} \right),$$

and, therefore, one degree-of-freedom. We conclude that we achieve $D_\Sigma = 2$.

First, we will consider (B), in which case we have two disjoint paths with manageable interference.

A. Two disjoint paths with manageable interference

We let P_{s_1, d_1} and P_{s_2, d_2} be our two disjoint paths such that we have $S \subset V$ containing P_{s_1, d_1} and P_{s_2, d_2} and satisfying $n_1(G[S]) \neq 1$ and $n_2(G[S]) \neq 1$. In general, we will assume that S is chosen to be minimal, and all the nodes in $V \setminus S$ are removed from the network. If we have $n_1(G[S]) = 0$ and $n_2(G[S]) = 0$, then achieving $D_\Sigma = 2$ is trivial: we have two disjoint paths P_{s_1, d_1} and P_{s_2, d_2} with no interference whatsoever. For networks where $n_i(G[S]) \geq 2$, for $i = 1$ or $i = 2$, we will define v_p^i to be the first node on P_{s_i, d_i} whose removal disconnects d_i from s_i . Notice that $V_{\ell(v_p^i)-1}$ is the layer containing $\mathcal{I}(v_p^i)$. This layer will be used as one of the key layers. Intuitively, this is the last layer where we can choose the scaling used at the nodes so that the interference on P_{s_i, d_i} is canceled. If $n_i(G[S]) \geq 2$ and $n_{\bar{i}}(G[S]) = 0$, for $i = 1$ or $i = 2$, our condensed network will be a two-hop network formed by layers $V_1, V_{\ell(v_p^i)-1}$ and V_r . If $n_1(G[S]) \geq 2$ and $n_2(G[S]) \geq 2$, our condensed network will be a three-hop network formed by layers $V_1, V_{\ell(v_p^1)-1}, V_{\ell(v_p^2)-1}$ and V_r (unless $\ell(v_p^1) = \ell(v_p^2)$, in which case the condensed network will be a two-hop network). We will need the following technical lemma about v_p^i , whose proof can be found in the Appendix.

Lemma 2. Assume $n_i(G[S]) \geq 2$, for $i = 1$ or $i = 2$, and let v_p^i be defined as above. Then, there exist two paths P_{s_1, v_p^1} and P_{s_2, v_p^2} such that $P_{s_1, v_p^1} \cap P_{s_2, v_p^2} = \{v_p^1\}$.

The importance of Lemma 2 is that it guarantees that the transfer matrix between (s_1, s_2) and two nodes in $\mathcal{I}(v_p^i)$ will be invertible with probability 1. This will be further explained later but, intuitively, it is necessary to give the nodes in $\mathcal{I}(v_p^i)$ freedom to cancel the interference from s_i on P_{s_i, d_i} . A second useful property about v_p^i is now stated in the form of another Lemma.

Lemma 3. Assume $n_i(G[S]) \geq 2$, for $i = 1$ or $i = 2$, and let v_p^i be defined as above. Then, there are (at least) two nodes $v_1, v_2 \in \mathcal{I}(v_p^i)$ such that $s_i \rightsquigarrow v_1$ and $s_i \rightsquigarrow v_2$.

Proof: Since $n_i(G[S]) \geq 2$, we have that $s_i \rightsquigarrow d_i$. Thus, since the removal of v_p^i disconnects s_i from d_i , we must have at least one node $v_1 \in \mathcal{I}(v_p^i)$ such that $s_i \rightsquigarrow v_1$. If we suppose by contradiction that v_1 is the only such node, then we have that v_1 disconnects s_i from d_i . If $v_1 \in P_{s_i, d_i}$ we contradict our choice of v_p^i . If $v_1 \notin P_{s_i, d_i}$, then we contradict the fact that $n_i(G[S]) \geq 2$. ■

The importance of the property in Lemma 3 is that it guarantees that, with probability 1, at least two nodes in $\mathcal{I}(v_p^i)$ will have in their received signal a component which corresponds to the transmitted signal from s_i . Intuitively, this means that, we can cancel the interference from s_i on P_{s_i, d_i} , while still allowing the signal from s_i to reach d_i . We now consider the case in which we have $n_1(G[S]) \geq 2$ and $n_2(G[S]) = 0$.

1) $n_1(G[S]) \geq 2$, $n_2(G[S]) = 0$: Notice that in this case only v_p^1 is defined. Thus, we will consider the condensed network formed by layers $V_1, V_{\ell(v_p^1)-1}$ and V_r , with $m = |V_{\ell(v_p^1)-1}|$. Our condensed network should look like the network in Figure 8. The solid lines correspond to edges that




Fig. 8. Illustration of a condensed network with $n_1(G[S]) \geq 2$ and $n_2(G[S]) = 0$.

must exist in the condensed network, due to the existence of two disjoint paths P_{s_1, d_1} and P_{s_2, d_2} . The dashed lines correspond to edges that may or may not exist. To each of the nodes v_i , $i = 1, \dots, m$ in the intermediate layer, we associate a variable x_i which will be the scaling factor used by node v_i . Our task is to show that the end-to-end transfer matrix, given by

$$T = \begin{bmatrix} \hat{h}(v_1, d_1) & \hat{h}(v_2, d_1) & \cdots & \hat{h}(v_m, d_1) \\ \hat{h}(v_1, d_2) & \hat{h}(v_2, d_2) & \cdots & \hat{h}(v_m, d_2) \end{bmatrix} \begin{bmatrix} x_1 & 0 & \cdots & 0 \\ 0 & x_2 & \cdots & 0 \\ \vdots & & \ddots & \vdots \\ 0 & 0 & \cdots & x_m \end{bmatrix} \begin{bmatrix} \hat{h}(s_1, v_1) & \hat{h}(s_2, v_1) \\ \hat{h}(s_1, v_2) & \hat{h}(s_2, v_2) \\ \vdots & \vdots \\ \hat{h}(s_1, v_m) & \hat{h}(s_2, v_m) \end{bmatrix} = \begin{bmatrix} T_{1,1} & T_{1,2} \\ T_{2,1} & T_{2,2} \end{bmatrix}, \quad (8)$$

where $T_{j,k} = \sum_{i=1}^m \hat{h}(s_j, v_i) \hat{h}(v_i, d_k) x_i$, can be made diagonal with non-zero diagonal entries by an appropriate choice of $x_1, \dots, x_m$. Since, in this case, $n_2(G[S]) = 0$, there is no path from s_1 to d_2 , and therefore we must have $\hat{h}(s_1, v_i) \hat{h}(v_i, d_2) = 0$ for $i = 1, \dots, m$ and $T_{2,1}$ is always 0. From the use of Lemma 2, we know that for two nodes $v_a, v_b \in \mathcal{I}(v_p^1) \subset V_{\ell(v_p^1)-1}$ with associated variables x_a and x_b , we must have two disjoint

paths P_{s_1, v_a} and P_{s_2, v_b} . From Lemma 3, we know that there is a node $v_c \in \mathcal{I}(v_p^1) \subset V_{\ell(v_p^1)-1}$, such that $s_2 \rightsquigarrow v_c$ and $c \neq m$. We now claim that if the matrices

$$M_1 = \begin{bmatrix} \hat{h}(s_1, v_a) \hat{h}(v_a, d_1) & \hat{h}(s_1, v_b) \hat{h}(v_b, d_1) \\ \hat{h}(s_2, v_a) \hat{h}(v_a, d_1) & \hat{h}(s_2, v_b) \hat{h}(v_b, d_1) \end{bmatrix} \text{ and}$$

$$M_2 = \begin{bmatrix} \hat{h}(s_2, v_c) \hat{h}(v_c, d_1) & \hat{h}(s_2, v_m) \hat{h}(v_m, d_1) \\ \hat{h}(s_2, v_c) \hat{h}(v_c, d_2) & \hat{h}(s_2, v_m) \hat{h}(v_m, d_2) \end{bmatrix}$$

are both full-rank, then we can choose $x_1, \dots, x_m$ so that T is diagonal with non-zero diagonal entries. To see this, we first consider $\mathbf{x}' = [x'_1 \dots x'_m]$, where $x'_j = 0$ for $j \neq a, b$, and $[x'_a \ x'_b]^T = M_1^{-1} [1 \ 0]^T$. This choice of scaling factors guarantees that $T_{1,1} = 1$ and $T_{1,2} = 0$. If $T_{2,2} \neq 0$ we are done. Otherwise, if $T_{2,2} = 0$, we let $\mathbf{x}'' = [x''_1 \dots x''_m]$, where $x''_j = 0$ for $j \neq c, m$ and $[x''_c \ x''_m]^T = M_2^{-1} [0 \ 1]^T$. This choice guarantees that $T_{1,2} = 0$ and $T_{2,2} = 1$. If we have $T_{1,1} \neq 0$, we are done. Otherwise, we set $\mathbf{x}''' = \mathbf{x}' + \mathbf{x}''$. By linearity, this choice will guarantee that T is the identity matrix.

Next we show that, with probability 1, M_1 and M_2 (which are just functions of the channel gains in the original network) are full-rank. First we consider the transfer matrix between (s_1, s_2) and (v_a, v_b) , given by

$$Z_1 = \begin{bmatrix} \hat{h}(s_1, v_a) & \hat{h}(s_2, v_a) \\ \hat{h}(s_1, v_b) & \hat{h}(s_2, v_b) \end{bmatrix}.$$

The determinant of Z_1 can be seen as a polynomial where the variables are the channel gains h_e from the original network. All we need to show is that this polynomial is not identically zero. Then, since the h_e 's are drawn independently from continuous distributions, $\det Z_1$ will be non-zero with probability 1. To see that this polynomial is not identically zero we notice that the existence of two disjoint paths P_{s_1, v_a} and P_{s_2, v_b} guarantees that, if we set $h_e = 1$ if e connects two consecutive vertices of P_{s_1, v_a} or P_{s_2, v_b} and $h_e = 0$ otherwise, Z_1 will be the identity matrix. Therefore, Z_1 will be invertible, and thus $\det Z_1$ cannot be identically zero. Now, we notice that

$$\begin{aligned} \det M_1 &= \begin{vmatrix} \hat{h}(s_1, v_a) \hat{h}(v_a, d_1) & \hat{h}(s_1, v_b) \hat{h}(v_b, d_1) \\ \hat{h}(s_2, v_a) \hat{h}(v_a, d_1) & \hat{h}(s_2, v_b) \hat{h}(v_b, d_1) \end{vmatrix} \\ &= \hat{h}(v_a, d_1) \hat{h}(v_b, d_1) \begin{vmatrix} \hat{h}(s_1, v_a) & \hat{h}(s_1, v_b) \\ \hat{h}(s_2, v_a) & \hat{h}(s_2, v_b) \end{vmatrix} \\ &= \hat{h}(v_a, d_1) \hat{h}(v_b, d_1) \det Z_1. \end{aligned}$$

Since $v_a \rightsquigarrow d_1$ and $v_b \rightsquigarrow d_1$, we have that $\hat{h}(v_a, d_1) \hat{h}(v_b, d_1)$ is also a non-identically zero polynomial in the h_e 's, and therefore M_1 is invertible with probability 1. To show that M_2 is invertible with probability 1, we will follow very similar steps. We notice that the transfer matrix between (v_c, v_m) and (d_1, d_2) is given by

$$Z_2 = \begin{bmatrix} \hat{h}(v_c, d_1) & \hat{h}(v_m, d_1) \\ \hat{h}(v_c, d_2) & \hat{h}(v_m, d_2) \end{bmatrix}.$$

Since $v_c \in \mathcal{I}(v_p^1)$ and $v_p^1 \in P_{s_1, d_1}$, we clearly have two disjoint paths $P_{v_c, d_1} = (v_c, v_p^1) \oplus P_{s_1, d_1}[v_p^1, d_1]$ and $P_{v_m, d_2} = P_{s_2, d_2}[v_m, d_2]$. This implies that $\det Z_2$ is non-identically zero,

and therefore non-zero with probability 1. Then, we notice that

$$\begin{aligned} \det M_2 &= \begin{vmatrix} \hat{h}(s_2, v_c) \hat{h}(v_c, d_1) & \hat{h}(s_2, v_m) \hat{h}(v_m, d_1) \\ \hat{h}(s_2, v_c) \hat{h}(v_c, d_2) & \hat{h}(s_2, v_m) \hat{h}(v_m, d_2) \end{vmatrix} \\ &= \hat{h}(s_2, v_c) \hat{h}(s_2, v_m) \begin{vmatrix} \hat{h}(v_c, d_1) & \hat{h}(v_m, d_1) \\ \hat{h}(v_c, d_2) & \hat{h}(v_m, d_2) \end{vmatrix} \\ &= \hat{h}(s_2, v_c) \hat{h}(s_2, v_m) \det Z_2, \end{aligned}$$

and, since $s_2 \rightsquigarrow v_c$, $s_2 \rightsquigarrow v_m$, we have that $\hat{h}(s_2, v_c) \hat{h}(s_2, v_m)$ is a non-identically zero polynomial in the h_e 's and therefore so is $\det M_2$. This proves that M_2 is full-rank with probability 1, and thus we conclude the proof when $n_1(G[S]) \geq 2$, $n_2(G[S]) = 0$. The case where $n_1(G[S]) = 0$, $n_2(G[S]) \geq 2$ follows in the exact same way.

Next, we consider the cases in which $n_1(G[S]) \geq 2$ and $n_2(G[S]) \geq 2$. We will use $V_{\ell(v_p^2)-1}$ and $V_{\ell(v_p^1)-1}$ as our key layers. We can assume WLOG that $\ell(v_p^2) \leq \ell(v_p^1)$. We consider the case where $\ell(v_p^2) < \ell(v_p^1)$ and the case where $\ell(v_p^2) = \ell(v_p^1)$ separately.

2) $n_1(G[S]) \geq 2$, $n_2(G[S]) \geq 2$ and $\ell(v_p^2) < \ell(v_p^1)$: We let $m = |V_{\ell(v_p^1)-1}|$ and $n = |V_{\ell(v_p^2)-1}|$. Our condensed network will be of the form shown in Figure 9a. Once again, the solid

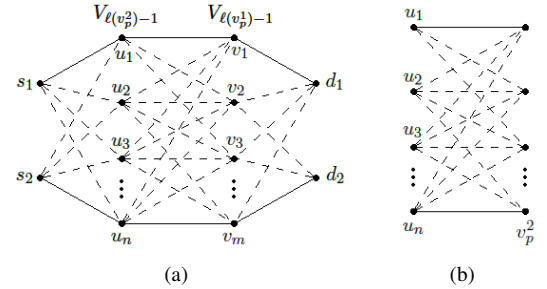


Fig. 9. (a) Illustration of the condensed network in the case where $n_1(G[S]) \geq 2$, $n_2(G[S]) \geq 2$ and $\ell(v_p^2) < \ell(v_p^1)$; (b) Illustration of the connectivity between layers $V_{\ell(v_p^2)-1}$ and $V_{\ell(v_p^1)-1}$ in the original network.

lines correspond to edges that must exist in the condensed network, due to the existence of two disjoint paths P_{s_1, d_1} and P_{s_2, d_2} , and the dashed lines correspond to edges that may or may not exist. We name the nodes in $V_{\ell(v_p^1)-1}$, $v_1, v_2, \dots, v_m$ and the nodes in $V_{\ell(v_p^2)-1}$, $u_1, u_2, \dots, u_n$. Moreover, to each of the nodes v_i , $i = 1, \dots, m$, we associate a variable x_i which will be the scaling factor used by node v_i , and to each of the nodes u_i , $i = 1, \dots, n$ we associate a variable y_i which will be the scaling factor used by node u_i .

We will again show that, with probability 1, there is a choice of $x_1, \dots, x_m$ and $y_1, \dots, y_n$ such that the effective end-to-end transfer matrix is diagonal with non-zero diagonal entries. This time, however, we will proceed in two steps. First we will show that, with probability 1, we can choose $y_1, \dots, y_n$ such that, for some $v_a, v_b \in \mathcal{I}(v_p^1)$, the transfer matrix between (s_1, s_2) and (v_a, v_b) is invertible and the transfer matrix between (s_1, s_2) and v_m is of the form $[0 \ \beta]$ for $\beta \neq 0$. Then, by “supressing” the key layer $V_{\ell(v_p^2)-1}$, we will essentially be in the case we described in V-A1, and thus we can choose $x_1, \dots, x_m$ so that the end-to-end transfer matrix is as desired.

In order to describe how we choose $y_1, \dots, y_n$ we must first consider the connectivity between the nodes in $V_{\ell(v_p^2)-1}$ and its consecutive layer, $V_{\ell(v_p^2)}$, in the original network. This layer transition can be depicted as in Figure 9b. We will now show that, with probability 1, it is possible to choose $y_1, \dots, y_n$ all non-zero, such that the transfer matrix F between (s_1, s_2) and v_p^2 is of the form $[0 \ \alpha]$ for $\alpha \neq 0$. We first notice that F is given by

$$\left[\sum_{i=1}^n \hat{h}(s_1, u_i) h_{(u_i, v_p^2)} y_i \quad \sum_{i=1}^n \hat{h}(s_2, u_i) h_{(u_i, v_p^2)} y_i \right].$$

From Lemma 3, we know that there are at least two nodes $u_c, u_d \in \mathcal{I}(v_p^2)$ such that $s_1 \rightsquigarrow u_c$ and $s_1 \rightsquigarrow u_d$. This implies that $\hat{h}(s_1, u_c) h_{(u_c, v_p^2)}$ and $\hat{h}(s_1, u_d) h_{(u_d, v_p^2)}$, if viewed as polynomials on the channel gains, are not identically zero. Thus, with probability 1, they will be non-zero, and $\sum_{i=1}^n \hat{h}(s_1, u_i) h_{(u_i, v_p^2)} y_i$ will have non-zero coefficients in front of y_c and y_d . This means that we can choose $\mathbf{y}' = (y'_1, \dots, y'_n)$, with $y'_1, \dots, y'_n$ all non-zero, so that $F_1 = \sum_{i=1}^n \hat{h}(s_1, u_i) h_{(u_i, v_p^2)} y'_i = 0$. If we have $F_2 = \sum_{i=1}^n \hat{h}(s_2, u_i) h_{(u_i, v_p^2)} y'_i \neq 0$, then we are done. Otherwise, if $F_2 = 0$, we proceed as follows. From Lemma 2, we know that we can choose $u_a, u_b \in \mathcal{I}(v_p^2) \subset V_{\ell(v_p^2)-1}$ so that we have two disjoint paths P_{s_1, u_a} and P_{s_2, u_b} . Therefore, the transfer matrix between (s_1, s_2) and (u_a, u_b) , given by

$$K = \begin{bmatrix} \hat{h}(s_1, u_a) & \hat{h}(s_1, u_b) \\ \hat{h}(s_2, u_a) & \hat{h}(s_2, u_b) \end{bmatrix},$$

is full-rank with probability 1. This also implies that the matrix

$$M = \begin{bmatrix} \hat{h}(s_1, u_a) h_{(u_a, v_p^2)} & \hat{h}(s_1, u_b) h_{(u_b, v_p^2)} \\ \hat{h}(s_2, u_a) h_{(u_a, v_p^2)} & \hat{h}(s_2, u_b) h_{(u_b, v_p^2)} \end{bmatrix}$$

is full-rank with probability 1, because we have $\det M = h_{(u_a, v_p^2)} h_{(u_b, v_p^2)} \det K$, and, since $u_a, u_b \in \mathcal{I}(v_p^2)$, we have that $h_{(u_a, v_p^2)} h_{(u_b, v_p^2)}$ is non-zero with probability 1. The matrix M allows us to build $\mathbf{y}'' = (y''_1, \dots, y''_n)$ by setting $y''_i = 0$, for $i \neq a, b$, and $[y''_a \ y''_b]^T = M^{-1} [0 \ 1]^T$. This choice guarantees that $F = [0 \ 1]$ as desired, but we do not have $y''_1, \dots, y''_n$ all non-zero. However, it is easy to see that if we set $\mathbf{y}''' = \mathbf{y}'' + \alpha \mathbf{y}'$, for some $\alpha \neq 0$, we will have $y'''_1, \dots, y'''_n$ all non-zero and $F = [0 \ \alpha]$.

We conclude that we can choose $y_1, \dots, y_n$ all non-zero and have $F = [0 \ \alpha]$ with $\alpha \neq 0$. Moreover, since there exists a path from v_p^2 to v_m , and there exists no path from s_1 to v_m which does not contain v_p^2 , we conclude that, with probability 1, our choice of $y_1, \dots, y_m$ will make the transfer matrix from (s_1, s_2) to v_m be of the form $[0 \ \beta]$ for $\beta \neq 0$.

Next, we would like to prove that, with this choice of $y_1, \dots, y_m$, there exist nodes $v_a, v_b \in \mathcal{I}(v_p^1)$, such that the transfer matrix between (s_1, s_2) and (v_a, v_b) is full-rank. First, we notice that, from Lemma 2, there exist two nodes $v_e, v_f \in \mathcal{I}(v_p^1)$, such that we have two disjoint paths P_{s_1, v_e} and P_{s_2, v_f} . However, we cannot proceed as before to conclude that the transfer matrix between (s_1, s_2) and (v_e, v_f) is full-rank with probability 1, because our variables $y_1, \dots, y_m$ were not chosen independently from the channel gains. Nonetheless, if we let $\tilde{H}$ be the set of all $h_{(u_j, v_p^2)}$ for $j = 1, \dots, n$ and all the channel gains that appear in $\hat{h}(s_i, u_j)$, for $i = 1, 2$

and $j = 1, \dots, n$, we notice that our choice of $y_1, \dots, y_n$ only depends on $\tilde{H}$. Therefore, we assume that all the channel gains in $\tilde{H}$ are drawn according to their distributions, and are from now on viewed as constants. Then, we can also fix $y_1, \dots, y_n$, following the steps described previously, and view them as constants.

First, we assume that neither P_{s_1, v_e} nor P_{s_2, v_f} contain v_p^2 . In this case we will show that we can set $v_a = v_e$ and $v_b = v_f$. The determinant of the transfer matrix between (s_1, s_2) and (v_e, v_f) can be seen as a polynomial where the variables are the channel gains which are not in $\tilde{H}$. Notice that all the channel gains not in $\tilde{H}$ are still independent (since the choice of $y_1, \dots, y_m$ was made independent of them) and have a continuous distribution. Thus, we will show that, with probability 1 over the choice of the channel gains in $\tilde{H}$, there exists a choice of the channel gains which are not in $\tilde{H}$, such that the transfer matrix between (s_1, s_2) and (v_e, v_f) is invertible. Therefore, the determinant of the transfer matrix between (s_1, s_2) and (v_e, v_f) is not identically zero, and will be non-zero with probability 1 over the choice of the channel gains not in $\tilde{H}$.

Since P_{s_1, v_e} and P_{s_2, v_f} are disjoint, there are distinct nodes u_e and u_f in $V_{\ell(v_p^2)-1}$, such that $u_e \in P_{s_1, v_e}$ and $u_f \in P_{s_2, v_f}$. For any $h_e \notin \tilde{H}$, we will set $h_e = 1$ if e connects two consecutive vertices of P_{s_1, v_e} or P_{s_2, v_f} and $h_e = 0$ otherwise. Therefore, the transfer matrix between (u_e, u_f) and (v_e, v_f) is the identity matrix. Thus, we have that the transfer matrix between (s_1, s_2) and (v_e, v_f) is given by

$$\begin{bmatrix} 1 & 0 \\ 0 & 1 \end{bmatrix} \begin{bmatrix} y_e & 0 \\ 0 & y_f \end{bmatrix} \begin{bmatrix} \hat{h}(s_1, u_e) & \hat{h}(s_2, u_e) \\ \hat{h}(s_1, u_f) & \hat{h}(s_2, u_f) \end{bmatrix}. \quad (9)$$

The existence of disjoint paths P_{s_1, v_e} and P_{s_2, v_f} implies the existence of disjoint paths $P_{s_1, u_e} = P_{s_1, v_e}[s_1, u_e]$ and $P_{s_2, u_f} = P_{s_2, v_f}[s_2, u_f]$. Therefore, with probability 1 over the choice of the channel gains in $\tilde{H}$ (since they were drawn independently first, according to their continuous distributions),

$$\begin{bmatrix} \hat{h}(s_1, u_e) & \hat{h}(s_2, u_e) \\ \hat{h}(s_1, u_f) & \hat{h}(s_2, u_f) \end{bmatrix}$$

is full-rank. Therefore, since we chose y_e and y_f to be non-zero, the transfer matrix in (9) must be full-rank, which implies that the transfer matrix between (s_1, s_2) and (v_e, v_f) is full-rank with probability 1 if $y_1, \dots, y_n$ are chosen as described above.

Now, we consider the situations in which either P_{s_1, v_e} or P_{s_2, v_f} contains v_p^2 . We will show that, in any case, for some $v_g, v_h \in \mathcal{I}(v_p^1)$, we can find either

- i. two other disjoint paths P_{s_1, v_g} and P_{s_2, v_h} not containing v_p^2 , or
- ii. two disjoint paths P_{s_1, v_g} and $P_{v_p^2, v_h}$.

If we suppose $v_p^2 \in P_{s_2, v_f}$, then we are clearly in case ii, by setting $g = e$ and $h = f$, and setting $P_{v_p^2, v_h} = P_{s_2, v_f}[v_p^2, v_f]$. Thus, we suppose that $v_p^2 \in P_{s_1, v_e}$. If we let w_f be the node from P_{s_2, v_f} in the layer containing v_p^2 , we have two disjoint paths $P_{s_1, v_p^2} = P_{s_1, v_e}[s_1, v_p^2]$ and $P_{s_2, w_f} = P_{s_2, v_f}[s_2, w_f]$. We also let w_1 be the node from P_{s_1, d_1} in $V_{\ell(v_p^2)}$. Then we let v_l be the last common node between P_{s_2, w_f} and

$P_{s_1,d_1} \cup P_{s_2,d_2}$. If $v_l \in P_{s_1,d_1}$ (Figure 10a), we must have disjoint paths P_{s_1,w_f} and P_{s_2,v_p^2} . This implies that we have a path $P_{s_1,v_f} = P_{s_1,w_f} \oplus P_{s_2,v_f}[w_f, v_f]$ and a path $P_{v_p^2,v_e} = P_{s_1,v_e}[v_p^2, v_e]$ which are disjoint, and we are in case ii. Note that this case also includes $w_f = w_1$. If, instead, $v_l \in P_{s_2,d_2}$ (Figure 10b), we must have disjoint paths P_{s_1,w_1} and P_{s_2,w_f} . We also clearly have two disjoint paths $P_{v_p^2,v_e} =$

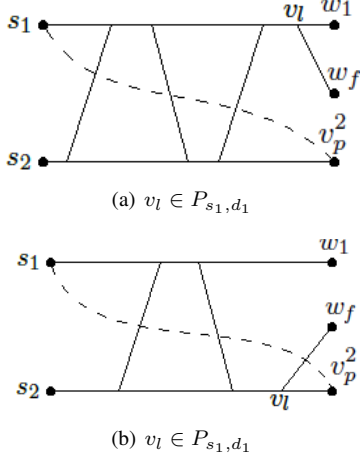


Fig. 10. Illustration of the two possible cases for v_l (the last common node between P_{s_2,u_f} and $P_{s_1,d_1} \cup P_{s_2,d_2}$).

$P_{s_1,v_e}[v_p^2, v_e]$ and $P_{w_f,v_f} = P_{s_2,v_f}[w_f, v_f]$. Thus, we let v_r be the first common node between P_{s_1,d_1} and $P_{v_p^2,v_e} \cup P_{w_f,v_f}$. If $v_r \in P_{w_f,v_f}$ (Figure 11a), then we have two disjoint paths $P_{s_1,v_f} = P_{s_1,d_1}[s_1, v_r] \oplus P_{w_f,v_f}[v_r, v_f]$ and $P_{v_p^2,v_e}$. Therefore, we are in case ii. If $v_r \in P_{v_p^2,v_e}$ (Figure 11b), then we have two disjoint paths $P_{w_1,v_e} = P_{s_1,d_1}[w_1, v_r] \oplus P_{v_p^2,v_e}[v_r, v_e]$ and P_{w_f,v_f} . Therefore, we can build two disjoint paths $P'_{s_1,v_e} = P_{s_1,w_1} \oplus P_{w_1,v_e}$ and $P'_{s_2,v_f} = P_{s_2,w_f} \oplus P_{w_f,v_f}$ not containing v_p^2 , and we are in case i. Finally, if v_r does not exist, we clearly have the disjoint paths $P_{s_1,d_1}[s_1, v_1]$ and $P_{v_p^2,v_e}$, and, since $v_1 \in \mathcal{I}(v_p^1)$, we are in case ii.

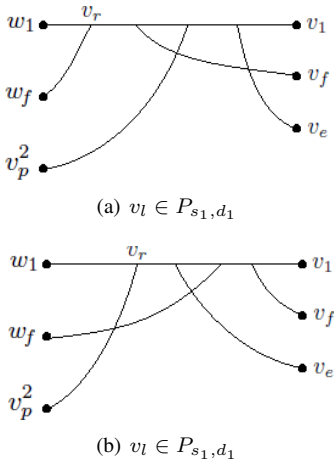


Fig. 11. Illustration of the two possible cases for v_r (the first common node between P_{s_1,d_1} and $P_{v_p^2,v_e} \cup P_{w_f,v_f}$).

Since case i was already taken care of, we only need to consider case ii. We will show that, if we have two

disjoint paths P_{s_1,v_g} and $P_{v_p^2,v_h}$, and if we choose $y_1, \dots, y_n$ as described previously, then, for some $v_g, v_h \in \mathcal{I}(v_p^1)$, the transfer matrix between (s_1, s_2) and (v_g, v_h) will be full-rank with probability 1 over the choice of the channel gains not in $\tilde{H}$. We will look at the determinant of the transfer matrix between (s_1, s_2) and (v_g, v_h) as a polynomial on the channel gains not in $\tilde{H}$, since the channel gains in $\tilde{H}$ and the scaling factors $y_1, \dots, y_n$ have already been fixed. Then we can show that this determinant is not identically zero by showing that for a specific choice of the channel gains not in $\tilde{H}$, the transfer matrix between (s_1, s_2) and (v_g, v_h) is full-rank. For any h_e not in $\tilde{H}$, we will choose $h_e = 1$ if e is connecting two consecutive vertices of P_{s_1,v_g} or $P_{v_p^2,v_h}$, and $h_e = 0$ otherwise. This means that the transfer matrix between (u_g, v_p^2) and (v_g, v_h) is the identity matrix. Then, if we let u_g be the node from P_{s_1,v_g} in layer $V_{\ell(v_p^2)-1}$, the transfer matrix between (s_1, s_2) and (v_g, v_h) is given by

$$\begin{bmatrix} 1 & 0 \\ 0 & 1 \end{bmatrix} \begin{bmatrix} y_g & 0 \\ 0 & 1 \end{bmatrix} \begin{bmatrix} \hat{h}(s_1, u_g) & \hat{h}(s_2, u_g) \\ \sum_{i=1}^n \hat{h}(s_1, u_i) h_{u_i, v_p^2} y_i & \sum_{i=1}^n \hat{h}(s_2, u_i) h_{u_i, v_p^2} y_i \end{bmatrix} \\ = \begin{bmatrix} y_g \hat{h}(s_1, u_g) & y_g \hat{h}(s_2, u_g) \\ 0 & \alpha \end{bmatrix}, \quad (10)$$

where we used the fact that our choice of $y_1, \dots, y_n$ guarantees that the transfer matrix between (s_1, s_2) and v_p^2 is $[0 \ \alpha]$ for some $\alpha \neq 0$. Now, since there exists a path from s_1 to u_g , $\hat{h}(s_1, u_g)$ is non-zero with probability 1 over the choice of the channel gains in $\tilde{H}$. Therefore, since y_g was chosen to be non-zero, the transfer matrix in (10) is upper-triangular (with non-zero diagonal entries) and thus full-rank.

Therefore we proved that we can find $v_a, v_b \in \mathcal{I}(v_p^1)$ so that the transfer matrix between (s_1, s_2) and (v_a, v_b) is full-rank with probability 1, after the choice of the scaling factors $y_1, \dots, y_m$. Next, we consider suppressing the layer $V_{\ell(v_p^2)-1}$ from the condensed network by incorporating our choice of $y_1, \dots, y_n$ into the terms $\hat{h}(s_i, v_j)$ for $i = 1, 2$ and $j = 1, \dots, m$. We will show that the resulting condensed network is equivalent to the one considered in V-A1. As in V-A1, the end-to-end transfer matrix can now be written as

$$\begin{bmatrix} \sum_{i=1}^m \hat{h}(s_1, v_i) \hat{h}(v_i, d_1) x_i & \sum_{i=1}^m \hat{h}(s_2, v_i) \hat{h}(v_i, d_1) x_i \\ \sum_{i=1}^m \hat{h}(s_1, v_i) \hat{h}(v_i, d_2) x_i & \sum_{i=1}^m \hat{h}(s_2, v_i) \hat{h}(v_i, d_2) x_i \end{bmatrix}. \quad (11)$$

As we noted before, the transfer matrix between (s_1, s_2) and v_m is of the form $[0 \ \beta]$ for some $\beta \neq 0$. This implies that $\hat{h}(s_1, v_m) = 0$ and $\hat{h}(s_2, v_m) = \beta \neq 0$. Moreover, since v_p^2 disconnects d_2 from s_1 , we conclude that $\hat{h}(s_1, v_i) \hat{h}(v_i, d_2) = 0$ for $i = 2, \dots, m$. Otherwise, this would either imply the existence of a path between s_1 and d_2 not containing v_p^2 or contradict the fact that the transfer matrix between (s_1, s_2) and v_p^2 is of the form $[0 \ \alpha]$. Thus, we conclude that $\sum_{i=1}^m \hat{h}(s_1, v_i) \hat{h}(v_i, d_2) x_i = 0$. As shown in V-A1, if we can find v_a, v_b and v_c , $c \neq m$, such that the

matrices

$$M_1 = \begin{bmatrix} \hat{h}(s_1, v_a) \hat{h}(v_a, d_1) & \hat{h}(s_1, v_b) \hat{h}(v_b, d_1) \\ \hat{h}(s_2, v_a) \hat{h}(v_a, d_1) & \hat{h}(s_2, v_b) \hat{h}(v_b, d_1) \end{bmatrix} \text{ and}$$

$$M_2 = \begin{bmatrix} \hat{h}(s_2, v_c) \hat{h}(v_c, d_1) & \hat{h}(s_2, v_m) \hat{h}(v_m, d_1) \\ \hat{h}(s_2, v_c) \hat{h}(v_c, d_2) & \hat{h}(s_2, v_m) \hat{h}(v_m, d_2) \end{bmatrix}$$

are both full-rank, then it is possible to choose $x_1, \dots, x_m$ so that the end-to-end transfer matrix in (11) is diagonal with non-zero diagonal entries. We will choose v_a and v_b to be the two nodes in $\mathcal{I}(v_p^1)$ for which the transfer matrix from (s_1, s_2) to (v_a, v_b)

$$\begin{bmatrix} \hat{h}(s_1, v_a) & \hat{h}(s_2, v_a) \\ \hat{h}(s_1, v_b) & \hat{h}(s_2, v_b) \end{bmatrix}$$

is full-rank with probability 1. Then, we will notice that

$$\det M_1 = \begin{vmatrix} \hat{h}(s_1, v_a) \hat{h}(v_a, d_1) & \hat{h}(s_1, v_b) \hat{h}(v_b, d_1) \\ \hat{h}(s_2, v_a) \hat{h}(v_a, d_1) & \hat{h}(s_2, v_b) \hat{h}(v_b, d_1) \end{vmatrix}$$

$$= \hat{h}(v_a, d_1) \hat{h}(v_b, d_1) \begin{vmatrix} \hat{h}(s_1, v_a) & \hat{h}(s_1, v_b) \\ \hat{h}(s_2, v_a) & \hat{h}(s_2, v_b) \end{vmatrix}.$$

Since $v_a, v_b \in \mathcal{I}(v_p^1)$, we have that $v_a \rightsquigarrow d_1$ and $v_b \rightsquigarrow d_1$, and $\hat{h}(v_a, d_1) \hat{h}(v_b, d_1)$ is non-zero with probability 1. Therefore, M_1 is invertible with probability 1.

As we did in V-A1, we use Lemma 3 to guarantee that we can choose $v_c \in \mathcal{I}(v_p^1)$ such that $s_2 \rightsquigarrow v_c$ and $c \neq m$. Then, we notice that the transfer matrix between (v_c, v_m) and (d_1, d_2) is given by

$$\begin{bmatrix} \hat{h}(v_c, d_1) & \hat{h}(v_m, d_1) \\ \hat{h}(v_c, d_2) & \hat{h}(v_m, d_2) \end{bmatrix}. \quad (12)$$

Since $v_c \in \mathcal{I}(v_p^1)$ and $v_p^1 \in P_{s_1, d_1}$, we clearly have two disjoint paths P_{v_c, d_1} and P_{v_m, d_2} . This implies that the transfer matrix in (12) is invertible with probability 1. Then, we notice that

$$\det M_2 = \begin{vmatrix} \hat{h}(s_2, v_c) \hat{h}(v_c, d_1) & \hat{h}(s_2, v_m) \hat{h}(v_m, d_1) \\ \hat{h}(s_2, v_c) \hat{h}(v_c, d_2) & \hat{h}(s_2, v_m) \hat{h}(v_m, d_2) \end{vmatrix}$$

$$= \hat{h}(s_2, v_c) \hat{h}(s_2, v_m) \begin{vmatrix} \hat{h}(v_c, d_1) & \hat{h}(v_m, d_1) \\ \hat{h}(v_c, d_2) & \hat{h}(v_m, d_2) \end{vmatrix}.$$

As we noticed before, our choice of $y_1, \dots, y_n$ guarantees that $\hat{h}(s_2, v_m) = \beta \neq 0$. Since $s_2 \rightsquigarrow v_c$, there must be at least one path P_{s_2, v_c} . If P_{s_2, v_c} does not contain v_p^2 , then the fact that we chose $y_1, \dots, y_m$ to be non-zero guarantees that $\hat{h}(s_2, v_c)$ is non-zero with probability 1. If P_{s_2, v_c} contains v_p^2 , then the fact that the transfer matrix between (s_1, s_2) and v_p^2 is $[0 \ \alpha]$ for $\alpha \neq 0$ guarantees that $\hat{h}(s_2, v_c)$ is non-zero with probability 1. Either way, we conclude that M_2 is invertible with probability 1. This concludes the proof when $n_1(G[S]) \geq 2$, $n_2(G[S]) \geq 2$ and $\ell(v_p^1) > \ell(v_p^2)$.

Next, we consider the situations in which $\ell(v_p^1) = \ell(v_p^2)$. In this case, our condensed network will only contain three layers, V_1 , $V_{\ell(v_p^1)-1} = V_{\ell(v_p^2)-1}$ and V_r . We will use two different approaches, depending on the size of $V_{\ell(v_p^1)-1}$.




Fig. 12. Illustration of the condensed network for the case where $n_1(G[S]) \geq 2$, $n_2(G[S]) \geq 2$, $\ell(v_p^2) = \ell(v_p^1)$ and $|V_{\ell(v_p^1)-1}| = 2$.

3) $n_1(G[S]) \geq 2$, $n_2(G[S]) \geq 2$, $\ell(v_p^2) = \ell(v_p^1)$ and $|V_{\ell(v_p^1)-1}| = 2$: Our condensed network should look like the network in Figure 12. The nodes in $V_{\ell(v_p^1)-1}$ are named according to Figure 12. We notice that all the edges in the condensed network must in fact exist. This can be justified as follows. Lemma 2 guarantees that $|\mathcal{I}(v_p^1)| \geq 2$ and $|\mathcal{I}(v_p^2)| \geq 2$. Thus we must have $\mathcal{I}(v_p^1) = \mathcal{I}(v_p^2) = \{v_1, v_2\}$, which justifies the existence of edges (v_i, d_j) for $i \in \{1, 2\}$ and $j \in \{1, 2\}$. Moreover, from Lemma 3, we have that there must be two distinct nodes v_a, v_b in $\mathcal{I}(v_p^1)$ such that $s_2 \rightsquigarrow v_a$ and $s_2 \rightsquigarrow v_b$. This justifies the existence of (s_2, v_1) and (s_2, v_2) . Similarly, we can apply Lemma 3 to v_p^2 to justify the existence of (s_1, v_2) and (s_1, v_1) .

The edge structure of the condensed network guarantees that, with probability 1, the transfer matrix between (s_1, s_2) and (v_1, v_2) and the transfer matrix between (v_1, v_2) and (d_1, d_2) , given respectively by

$$\begin{bmatrix} \hat{h}(s_1, v_1) & \hat{h}(s_2, v_1) \\ \hat{h}(s_1, v_2) & \hat{h}(s_2, v_2) \end{bmatrix} \text{ and } \begin{bmatrix} \hat{h}(v_1, d_1) & \hat{h}(v_2, d_1) \\ \hat{h}(v_1, d_2) & \hat{h}(v_2, d_2) \end{bmatrix},$$

have only non-zero entries. Furthermore, from our previous discussions, we know that the existence of disjoint paths $P_{s_1, v_1} = P_{s_1, d_1}[s_1, v_1]$ and $P_{s_2, v_2} = P_{s_2, d_2}[s_2, v_2]$ guarantees that the transfer matrix between (s_1, s_2) and (v_1, v_2) is full-rank with probability 1. Similarly, the existence of disjoint paths P_{v_1, d_1} and P_{v_2, d_2} guarantees that the transfer matrix between (v_1, v_2) and (d_1, d_2) is full-rank with probability 1. Therefore, we essentially have the $2 \times 2 \times 2$ interference channel described in [30]. The only difference is that additive noises at v_1, v_2, d_1 and d_2 are not independent and Gaussian. However, they still have a variance which does not depend on the power P (only on the channel gains), and thus the same scheme described in [30] will achieve $D_\Sigma = 2$.

4) $n_1(G[S]) \geq 2$, $n_2(G[S]) \geq 2$, $\ell(v_p^2) = \ell(v_p^1)$ and $|V_{\ell(v_p^1)-1}| \geq 3$: In this case, our condensed network is shown in Figure 13. Once again we let $v_1, \dots, v_m$ be the nodes in




Fig. 13. Illustration of the condensed network for the case where $n_1(G[S]) \geq 2$, $n_2(G[S]) \geq 2$, $\ell(v_p^2) = \ell(v_p^1)$ and $|V_{\ell(v_p^1)-1}| \geq 3$.

$V_{\ell(v_p^1)-1} = V_{\ell(v_p^2)-1}$, and to each of the nodes $v_i, i = 1, \dots, m$, we associate a variable x_i which will be the scaling factor used by node v_i . We will show that the end-to-end transfer matrix, given by

$$\begin{bmatrix} \sum_{i=1}^m \hat{h}(s_1, v_i) \hat{h}(v_i, d_1) x_i & \sum_{i=1}^m \hat{h}(s_2, v_i) \hat{h}(v_i, d_1) x_i \\ \sum_{i=1}^m \hat{h}(s_1, v_i) \hat{h}(v_i, d_2) x_i & \sum_{i=1}^m \hat{h}(s_2, v_i) \hat{h}(v_i, d_2) x_i \end{bmatrix}, \quad (13)$$

can be made diagonal with non-zero diagonal entries by an appropriate choice of $x_1, \dots, x_m$. First, we notice that we can assume that, in the original network, any layer V_i for $i \geq \ell(v_p^1)$ only contains two nodes. This is because any node in such layer V_i which is not in P_{s_1, d_1} nor P_{s_2, d_2} can be removed since it may not contribute to $n_1(G[S])$ nor $n_2(G[S])$ (or that would contradict the fact that v_p^1 disconnects d_1 from s_2 and v_p^2 disconnects d_2 from s_1). Therefore, the edge configuration between $V_{\ell(v_p^1)-1}$ and $\{d_1, d_2\}$ in the condensed network is the same as the edge configuration between $V_{\ell(v_p^1)-1}$ and $V_{\ell(v_p^1)}$ in the original network. It is then easy to see that each $\hat{h}(v_i, d_j)$, for $i = 1, \dots, m$ and $j = 1, 2$, when seen as a polynomial in the channel gains, is composed of a single product of variables h_e , one of which is not shared by any other $\hat{h}$.

Next we claim that if we can find two sets of nodes $\{v_a, v_b, v_c\} \subset V_{\ell(v_p^1)-1}$ and $\{v_d, v_e, v_f\} \subset V_{\ell(v_p^1)-1}$, such that the matrices

$$M_1 = \begin{bmatrix} \hat{h}(s_1, v_a) \hat{h}(v_a, d_1) & \hat{h}(s_1, v_b) \hat{h}(v_b, d_1) \\ \hat{h}(s_2, v_a) \hat{h}(v_a, d_1) & \hat{h}(s_2, v_b) \hat{h}(v_b, d_1) \\ \hat{h}(s_1, v_a) \hat{h}(v_a, d_2) & \hat{h}(s_1, v_b) \hat{h}(v_b, d_2) \\ \hat{h}(s_1, v_c) \hat{h}(v_c, d_1) \\ \hat{h}(s_2, v_c) \hat{h}(v_c, d_1) \\ \hat{h}(s_1, v_b) \hat{h}(v_b, d_2) \end{bmatrix} \text{ and } M_2 = \begin{bmatrix} \hat{h}(s_2, v_d) \hat{h}(v_d, d_2) & \hat{h}(s_2, v_e) \hat{h}(v_e, d_2) \\ \hat{h}(s_1, v_d) \hat{h}(v_d, d_2) & \hat{h}(s_1, v_e) \hat{h}(v_e, d_2) \\ \hat{h}(s_2, v_d) \hat{h}(v_d, d_1) & \hat{h}(s_2, v_e) \hat{h}(v_e, d_1) \\ \hat{h}(s_2, v_f) \hat{h}(v_f, d_2) \\ \hat{h}(s_1, v_f) \hat{h}(v_f, d_2) \\ \hat{h}(s_2, v_f) \hat{h}(v_f, d_1) \end{bmatrix}$$

are full-rank, then we can choose $x_1, \dots, x_m$ such that the transfer matrix in (13) is diagonal with non-zero diagonal entries. To see this, suppose M_1 and M_2 are full-rank. Then we can set $\mathbf{x}' = [x'_1 \dots x'_m]$, where $x'_j = 0$ for $j \neq a, b, c$, and $[x'_a \ x'_b \ x'_c]^T = M_1^{-1} [1 \ 0 \ 0]^T$. This guarantees that the transfer matrix in (13) is of the form

$$\begin{bmatrix} 1 & 0 \\ 0 & \gamma \end{bmatrix}.$$

If $\gamma \neq 0$, we achieve our goal with $\mathbf{x}'$. If $\gamma = 0$, we set $\mathbf{x}'' = [x''_1 \dots x''_m]$, where $x''_j = 0$ for $j \neq d, e, f$, and $[x''_d \ x''_e \ x''_f]^T = M_2^{-1} [1 \ 0 \ 0]^T$. This guarantees that the transfer matrix in (13) is of the form

$$\begin{bmatrix} \delta & 0 \\ 0 & 1 \end{bmatrix}.$$

If $\delta \neq 0$, we achieve our goal with $\mathbf{x}''$. If $\delta = 0$, then we let $\mathbf{x}''' = \mathbf{x}' + \mathbf{x}''$, and the transfer matrix in (13) becomes the identity matrix.

Next, we show that we can either find $\{v_a, v_b, v_c\}$ and $\{v_d, v_e, v_f\}$ as described above, or we can remove nodes from $V_{\ell(v_p^1)-1}$ so that we have a $2 \times 2 \times 2$ interference channel (case V-A3). We start by applying Lemma 2 to v_p^1 . Then we can find $u_a, u_b \in \mathcal{I}(v_p^1)$ so that there are two disjoint paths P_{s_1, u_a} and P_{s_2, u_b} . Then, from Lemma 3 applied to v_p^2 , we know that there exist nodes $u_c, u_d \in \mathcal{I}(v_p^2)$ such that $s_1 \rightsquigarrow u_c$ and $s_1 \rightsquigarrow u_d$. Suppose $\{u_a, u_b\} \neq \{u_c, u_d\}$. Then we can assume WLOG that $u_c \neq u_a, u_b$. We choose $\{v_a, v_b, v_c\} = \{u_a, u_b, u_c\}$ and we have

$\det M_1 =$

$$\begin{vmatrix} \hat{h}(s_1, u_a) \hat{h}(u_a, d_1) & \hat{h}(s_1, u_b) \hat{h}(u_b, d_1) & \hat{h}(s_1, u_c) \hat{h}(u_c, d_1) \\ \hat{h}(s_2, u_a) \hat{h}(u_a, d_1) & \hat{h}(s_2, u_b) \hat{h}(u_b, d_1) & \hat{h}(s_2, u_c) \hat{h}(u_c, d_1) \\ \hat{h}(s_1, u_a) \hat{h}(u_a, d_2) & \hat{h}(s_1, u_b) \hat{h}(u_b, d_2) & \hat{h}(s_1, u_c) \hat{h}(u_c, d_2) \end{vmatrix} \\ = \hat{h}(s_1, u_c) \hat{h}(u_c, d_1) \begin{vmatrix} \hat{h}(s_2, u_a) \hat{h}(u_a, d_1) & \hat{h}(s_2, u_b) \hat{h}(u_b, d_1) \\ \hat{h}(s_1, u_a) \hat{h}(u_a, d_2) & \hat{h}(s_1, u_b) \hat{h}(u_b, d_2) \end{vmatrix} \\ - \hat{h}(s_2, u_c) \hat{h}(u_c, d_1) \begin{vmatrix} \hat{h}(s_1, u_a) \hat{h}(u_a, d_1) & \hat{h}(s_1, u_b) \hat{h}(u_b, d_1) \\ \hat{h}(s_1, u_a) \hat{h}(u_a, d_2) & \hat{h}(s_1, u_b) \hat{h}(u_b, d_2) \end{vmatrix} \\ + \hat{h}(s_1, u_c) \hat{h}(u_c, d_2) \begin{vmatrix} \hat{h}(s_1, u_a) \hat{h}(u_a, d_1) & \hat{h}(s_1, u_b) \hat{h}(u_b, d_1) \\ \hat{h}(s_2, u_a) \hat{h}(u_a, d_1) & \hat{h}(s_2, u_b) \hat{h}(u_b, d_1) \end{vmatrix}.$$

The third term in the expansion above can be written as

$$\hat{h}(s_1, u_c) \hat{h}(u_c, d_2) \hat{h}(u_a, d_1) \hat{h}(u_b, d_1) \begin{vmatrix} \hat{h}(s_1, u_a) & \hat{h}(s_1, u_b) \\ \hat{h}(s_2, u_a) & \hat{h}(s_2, u_b) \end{vmatrix},$$

which is a non-identically zero polynomial since $s_1 \rightsquigarrow u_c$, $u_c \in \mathcal{I}(v_p^2)$, $u_a, u_b \in \mathcal{I}(v_p^1)$, and there are two disjoint paths P_{s_1, u_a} and P_{s_2, u_b} . Moreover, as we noticed before, one of the variables in $\hat{h}(u_c, d_2)$ is not shared by any other effective channel gain $\hat{h}$, and therefore, the term above cannot be canceled by the other terms. This allows us to conclude that M_1 is full-rank with probability 1. Now, suppose $\{u_a, u_b\} = \{u_c, u_d\}$. This means that the original network must contain the network shown in Figure 14. The curvy lines are used to represent paths. At this point, if $s_2 \rightsquigarrow u_a$, then we can remove the

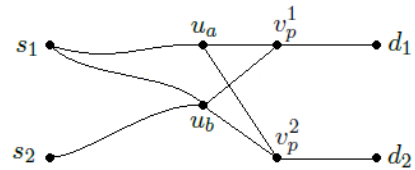


Fig. 14. Illustration of a subnetwork contained by the network from V-A4, in the case where $\{u_a, u_b\} = \{u_c, u_d\}$

nodes in $V_{\ell(v_p^1)-1} \setminus \{u_a, u_b\}$, and we are in the case of V-A3. If $s_2 \not\rightsquigarrow u_a$, then $\hat{h}(s_2, u_a) = 0$, and by applying Lemma 3 to v_p^1 , we must have at least one node $u'_c \in \mathcal{I}(v_p^1) \setminus \{u_a, u_b\}$, such that $s_2 \rightsquigarrow u'_c$ (since u_b is the other one). Then we choose $\{v_a, v_b, v_c\} = \{u_a, u_b, u'_c\}$. If $\hat{h}(s_1, u'_c) \hat{h}(u'_c, d_2)$ is not identically zero, then the same proof shown above with u'_c instead of u_c will show that M_1 is full-rank with probability 1. If we assume that $\hat{h}(s_1, u'_c) \hat{h}(u'_c, d_2)$ is identically zero, then

we have

$$\begin{aligned} \det M_1 = & \begin{vmatrix} \hat{h}(s_1, u_a)\hat{h}(u_a, d_1) & \hat{h}(s_1, u_b)\hat{h}(u_b, d_1) & \hat{h}(s_1, u'_c)\hat{h}(u'_c, d_1) \\ 0 & \hat{h}(s_2, u_b)\hat{h}(u_b, d_1) & \hat{h}(s_2, u'_c)\hat{h}(u'_c, d_1) \\ \hat{h}(s_1, u_a)\hat{h}(u_a, d_2) & \hat{h}(s_1, u_b)\hat{h}(u_b, d_2) & 0 \end{vmatrix} \\ = & -\hat{h}(s_1, u'_c)\hat{h}(u'_c, d_1)\hat{h}(s_2, u_b)\hat{h}(u_b, d_1)\hat{h}(s_1, u_a)\hat{h}(u_a, d_2) \\ & + \hat{h}(s_2, u'_c)\hat{h}(u'_c, d_1)\hat{h}(s_1, u_b)\hat{h}(u_b, d_1)\hat{h}(s_1, u_a)\hat{h}(u_a, d_2) \\ & - \hat{h}(s_2, u'_c)\hat{h}(u'_c, d_1)\hat{h}(s_1, u_a)\hat{h}(u_a, d_1)\hat{h}(s_1, u_b)\hat{h}(u_b, d_2). \end{aligned}$$

The last term is non-identically zero since $s_2 \rightsquigarrow u'_c$, $u'_c \in \mathcal{I}(v_p^1)$, $s_1 \rightsquigarrow u_a$, $u_a \in \mathcal{I}(v_p^1)$, $s_1 \rightsquigarrow u_b$ and $u_b \in \mathcal{I}(v_p^2)$. Moreover, as we noticed before, one of the variables in $\hat{h}(u_a, d_1)$ is not shared by any other effective channel gain $\hat{h}$, and therefore the last term above cannot be cancelled by the other two terms. Thus, we conclude that M_1 is invertible with probability 1.

From the symmetry between M_1 and M_2 (they simply have (s_1, d_1) and (s_2, d_2) exchanged), the exact same steps can be used to show that either we can find the nodes $\{v_d, v_e, v_f\} \subset V_{\ell(v_p^1)-1}$ such that M_2 is full-rank with probability 1, or we can remove nodes from $V_{\ell(v_p^1)-1}$ so that we are in the case of V-A3. This concludes the achievability proof of $D_\Sigma = 2$ in the cases where we have two disjoint paths with manageable interference.

Next, we proceed to providing the achievability scheme for (B'), in which case we have a subnetwork with no two disjoint paths, and no node v as described in (A).

B. The butterfly and the grail

We start by inferring important properties of the structure of the network, if it does not fall into case (A). We will show that such a network must contain one of the subnetworks in Figure 4. The subnetwork in Figure 4a simply contains two disjoint paths P_{s_1, d_1} and P_{s_2, d_2} . Next, we formally characterize the other two.

Definition 11. *The network $\mathcal{N}$ is a Butterfly network if it contains two nodes u_0 and u_1 connected by a path P_{u_0, u_1} (if $u_0 = u_1$, then we assume the path consists of a single node), two disjoint paths P_{s_1, d_2} and P_{s_2, d_1} which do not contain any node from P_{u_0, u_1} , and two paths P_{s_1, d_1} and P_{s_2, d_2} such that $P_{s_1, d_1} \cap P_{s_2, d_2} = P_{u_0, u_1}$. An example is shown in Figure 15.*

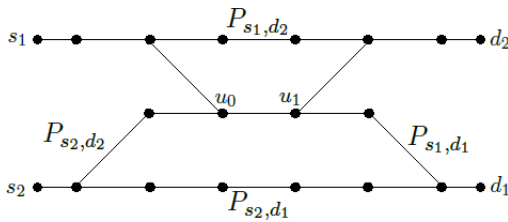


Fig. 15. Illustration of a network that contains a Butterfly subnetwork.

Definition 12. *The network $\mathcal{N}$ is a Grail network if it contains two disjoint paths P_{s_1, d_2} and P_{s_2, d_1} and nodes $w_a \in P_{s_1, d_2}$ and $w_b \in P_{s_2, d_1}$ such that $s_2 \rightsquigarrow w_a$, $w_a \rightsquigarrow w_b$, and $w_b \rightsquigarrow d_2$. An example is shown in Figure 16.*

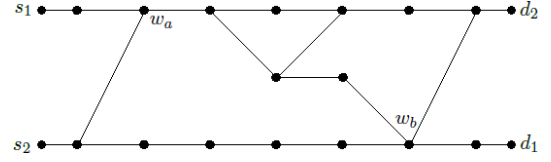


Fig. 16. Illustration of a network that contains a Grail subnetwork.

Then we can state the following Claim.

Claim 1. *The absence of a node v whose removal disconnects d_i from both sources and s_i from both destinations, for $i = 1$ or $i = 2$, implies that $\mathcal{N}$ must contain (i) two disjoint paths P_{s_1, d_1} and P_{s_2, d_2} , (ii) a butterfly subnetwork, or (iii) a grail subnetwork.*

Sketch of proof: We start by building an extended network $\mathcal{N}'$, by transforming each layer of our original network into two copies of itself, and connecting each node to its copy. Then we notice that the absence of a node v whose removal disconnects d_i from both sources and s_i from both destinations in the original network, for $i = 1$ or $i = 2$, implies the absence of an edge e whose removal disconnects d_i from both sources and s_i from both destinations, $i = 1$ or $i = 2$, in the extended network. Therefore, the result obtained in [27, 28] guarantees that $\mathcal{N}'$ either contains two edge-disjoint paths, a butterfly or a grail. Since any two edge-disjoint paths in $\mathcal{N}'$ are also vertex-disjoint, we conclude that our original network must contain two vertex-disjoint paths, a butterfly or a grail. A more detailed proof can be found in Appendix C.

Next, we assume that all nodes that do not belong to the subnetwork satisfying the conditions in (B') are removed. Since the resulting network does not contain two disjoint paths, but does not fall in case (A), we conclude from Claim 1 that we may either have a butterfly network or a grail network. We provide achievability schemes for each case separately.

1) *Butterfly network:* We assume we have a subnetwork as described in Definition 11 and that any node which does not belong to P_{s_1, d_1} , P_{s_2, d_2} , P_{s_1, d_2} or P_{s_2, d_1} is removed from the network. Moreover, we will assume that, if there are several choices for u_0 and u_1 , we choose them so that u_1 is as close as possible to the destinations (i.e., we maximize $\ell(u_1)$).

Similar to what we did in the case of two disjoint paths with manageable interference, we will identify a key layer and build a condensed network. Then we will show that by using amplify-and-forward in the nodes in the intermediate key layer, we can make the end-to-end transfer matrix diagonal with non-zero diagonal entries. As our key layer, we will use $V_{\ell(u_1)}$. Notice that we are guaranteed to have three nodes in $V_{\ell(u_1)}$ (since any extra node would have been removed). The condensed network is shown in Figure 17.

We let the three nodes in $V_{\ell(u_1)}$ be called v_1, v_2 and v_3 as shown in Figure 17 (notice that $v_2 = u_1$), and associate scaling factors x_1, x_2 and x_3 to them. We will follow the same steps that we used in V-A4, except that now our intermediate layer has exactly three nodes. Thus, we will show that either we can remove one of the nodes in $V_{\ell(u_1)}$ so that the resulting condensed network falls in case V-A3 (i.e., a $2 \times 2 \times 2$




Fig. 17. Illustration of the condensed network of a Butterfly network.

interference channel), or the matrices

$$M_1 = \begin{bmatrix} \hat{h}(s_1, v_1)\hat{h}(v_1, d_1) & \hat{h}(s_1, v_2)\hat{h}(v_2, d_1) \\ \hat{h}(s_2, v_1)\hat{h}(v_1, d_1) & \hat{h}(s_2, v_2)\hat{h}(v_2, d_1) \\ \hat{h}(s_1, v_1)\hat{h}(v_1, d_2) & \hat{h}(s_1, v_2)\hat{h}(v_2, d_2) \\ \hat{h}(s_1, v_3)\hat{h}(v_3, d_1) \\ \hat{h}(s_2, v_3)\hat{h}(v_3, d_1) \\ \hat{h}(s_1, v_3)\hat{h}(v_3, d_2) \end{bmatrix} \text{ and}$$

$$M_2 = \begin{bmatrix} \hat{h}(s_2, v_1)\hat{h}(v_1, d_2) & \hat{h}(s_2, v_2)\hat{h}(v_2, d_2) \\ \hat{h}(s_1, v_1)\hat{h}(v_1, d_2) & \hat{h}(s_1, v_2)\hat{h}(v_2, d_2) \\ \hat{h}(s_2, v_1)\hat{h}(v_1, d_1) & \hat{h}(s_2, v_2)\hat{h}(v_2, d_1) \\ \hat{h}(s_2, v_3)\hat{h}(v_3, d_2) \\ \hat{h}(s_1, v_3)\hat{h}(v_3, d_2) \\ \hat{h}(s_2, v_3)\hat{h}(v_3, d_1) \end{bmatrix}$$

are full-rank with probability 1. In the latter case, the same steps as in V-A4 guarantee that we can find x_1, x_2, x_3 such that the end-to-end transfer matrix is diagonal with non-zero diagonal entries. An important property about the Butterfly structure is that for any two nodes $v_a, v_b \in V_{\ell(u_1)}$, there exists two disjoint paths between $\{s_1, s_2\}$ and $\{v_a, v_b\}$ and two disjoint paths between $\{v_a, v_b\}$ and $\{d_1, d_2\}$. Therefore, we see that if $\hat{h}(s_2, v_1)\hat{h}(v_1, d_1)$ is a non-identically zero polynomial in the channel gains, we can remove v_3 and we are in V-A3. Similarly if $\hat{h}(s_1, v_3)\hat{h}(v_3, d_2)$ is non-identically zero, we can remove v_1 and we are in V-A3. Therefore, we may assume that either $\hat{h}(s_1, v_3)$ or $\hat{h}(v_3, d_2)$ is zero, and either $\hat{h}(s_2, v_1)$ or $\hat{h}(v_1, d_1)$ is zero. To show that M_1 is full-rank with probability 1, we first consider the case when $\hat{h}(v_3, d_2) = 0$. We notice that the fact that $\hat{h}(v_3, d_2) = 0$ and our assumption that u_1 was chosen as close as possible to the destinations guarantee that there is no path starting on a node in $P_{v_3, d_1} \cup P_{v_2, d_1} \setminus \{v_2\}$ and ending in d_2 . Thus, we see that the first channel gain in the P_{v_2, d_1} path only appears as a variable in $\hat{h}(v_2, d_1)$, and no other $\hat{h}$. Then we notice that

$$\det M_1 = \begin{vmatrix} \hat{h}(s_1, v_1)\hat{h}(v_1, d_1) & \hat{h}(s_1, v_2)\hat{h}(v_2, d_1) & \hat{h}(s_1, v_3)\hat{h}(v_3, d_1) \\ 0 & \hat{h}(s_2, v_2)\hat{h}(v_2, d_1) & \hat{h}(s_2, v_3)\hat{h}(v_3, d_1) \\ \hat{h}(s_1, v_1)\hat{h}(v_1, d_2) & \hat{h}(s_1, v_2)\hat{h}(v_2, d_2) & 0 \end{vmatrix}$$

$$= -\hat{h}(s_1, v_1)\hat{h}(v_1, d_1)\hat{h}(s_2, v_3)\hat{h}(v_3, d_1)\hat{h}(s_1, v_2)\hat{h}(v_2, d_2)$$

$$+ \hat{h}(s_1, v_1)\hat{h}(v_1, d_2)\hat{h}(v_2, d_1)\hat{h}(v_3, d_1) \begin{vmatrix} \hat{h}(s_1, v_2) & \hat{h}(s_1, v_3) \\ \hat{h}(s_2, v_2) & \hat{h}(s_2, v_3) \end{vmatrix}.$$

The last term is a non-identically zero polynomial, since $s_1 \rightsquigarrow v_1$, $v_1 \rightsquigarrow d_2$, $v_2 \rightsquigarrow d_1$, $v_3 \rightsquigarrow d_1$ and there are two disjoint paths P_{s_1, v_2} and P_{s_2, v_3} . Thus, since $\hat{h}(v_2, d_1)$ contains a variable which cannot be cancelled by the other term, we conclude that $\det M_1$ is non-identically zero, and M_1 is full-rank with probability 1. If instead we assume that $\hat{h}(v_3, d_2)$ is

not identically zero, then $\hat{h}(s_1, v_3) = 0$, and we have that

$$\det M_1 = \begin{vmatrix} \hat{h}(s_1, v_1)\hat{h}(v_1, d_1) & \hat{h}(s_1, v_2)\hat{h}(v_2, d_1) & 0 \\ 0 & \hat{h}(s_2, v_2)\hat{h}(v_2, d_1) & \hat{h}(s_2, v_3)\hat{h}(v_3, d_1) \\ \hat{h}(s_1, v_1)\hat{h}(v_1, d_2) & \hat{h}(s_1, v_2)\hat{h}(v_2, d_2) & 0 \end{vmatrix}$$

$$= -\hat{h}(s_2, v_3)\hat{h}(v_3, d_1)\hat{h}(s_1, v_1)\hat{h}(s_1, v_2)$$

$$\begin{vmatrix} \hat{h}(v_1, d_1) & \hat{h}(v_2, d_1) \\ \hat{h}(v_1, d_2) & \hat{h}(v_2, d_2) \end{vmatrix},$$

which is not identically zero, since $s_2 \rightsquigarrow v_3$, $v_3 \rightsquigarrow d_1$, $s_1 \rightsquigarrow v_1$, $s_1 \rightsquigarrow v_2$ and there are two disjoint paths P_{v_1, d_2} and P_{v_2, d_1} . Therefore, we conclude that M_1 is full-rank with probability 1. From the symmetry between M_1 and M_2 , we conclude that the same steps (but considering $\hat{h}(s_2, v_1)$ or $\hat{h}(v_1, d_1)$ to be zero) will show that M_2 is full-rank with probability 1.

2) *Grail network*: We assume that we have a minimal subnetwork which still satisfies Definition 12, i.e., all the unnecessary nodes are removed. As key layers, we will use $V_{\ell(w_a)}$ and $V_{\ell(w_b)}$. Notice that if we assume that the subnetwork is chosen to be minimal, each of these layers must contain exactly two nodes. Therefore, our condensed network will be as shown in Figure 18. We will let the

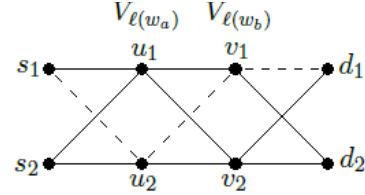


Fig. 18. Illustration of the condensed network of a Grail network.

nodes in $V_{\ell(w_a)}$ be called u_1 and u_2 , and the nodes in $V_{\ell(w_b)}$ be called v_1 and v_2 , as shown in Figure 18. Next we will show that either we can suppress one of the two intermediate key layers (by assuming their nodes are just forwarding their received signals) and obtain a network as in V-A3, or we can choose scaling factors y_1, y_2, x_1 and x_2 (respectively for u_1, u_2, v_1 and v_2) so that the end-to-end transfer matrix is diagonal with non-zero diagonal entries. We notice that if $\hat{h}(s_1, u_2)$ is not identically zero, then the existence of two disjoint paths P_{s_1, d_2} and P_{s_2, d_1} guarantees that if we suppress $V_{\ell(w_b)}$ from the condensed network, we obtain the network in V-A3. Similarly, if $\hat{h}(v_1, d_1)$ is not identically zero, we can suppress $V_{\ell(w_a)}$ from the condensed network, and we are again in the case of V-A3. Therefore, we will assume that $\hat{h}(s_1, u_2) = \hat{h}(v_1, d_1) = 0$, and we will show that there is a choice of y_1, y_2, x_1 and x_2 so that the end-to-end transfer matrix is diagonal with non-zero diagonal entries. In order to do that we first consider the transfer matrix between V_1 and $V_{\ell(w_b)}$, which is given by

$$F = \begin{bmatrix} \hat{h}(s_1, u_1)\hat{h}(u_1, v_1)y_1 \\ \hat{h}(s_1, u_1)\hat{h}(u_1, v_2)y_1 \\ \hat{h}(s_2, u_1)\hat{h}(u_1, v_1)y_1 + \hat{h}(s_2, u_2)\hat{h}(u_2, v_1)y_2 \\ \hat{h}(s_2, u_1)\hat{h}(u_1, v_2)y_1 + \hat{h}(s_2, u_2)\hat{h}(u_2, v_2)y_2 \end{bmatrix}. \quad (14)$$

Then we notice that if we let

$$M = \begin{bmatrix} \hat{h}(s_2, u_1)\hat{h}(u_1, v_1) & \hat{h}(s_2, u_2)\hat{h}(u_2, v_1) \\ \hat{h}(s_2, u_1)\hat{h}(u_1, v_2) & \hat{h}(s_2, u_2)\hat{h}(u_2, v_2) \end{bmatrix},$$

we have

$$\begin{aligned} \det M &= \begin{vmatrix} \hat{h}(s_2, u_1)\hat{h}(u_1, v_1) & \hat{h}(s_2, u_2)\hat{h}(u_2, v_1) \\ \hat{h}(s_2, u_1)\hat{h}(u_1, v_2) & \hat{h}(s_2, u_2)\hat{h}(u_2, v_2) \end{vmatrix} \\ &= \hat{h}(s_2, u_1)\hat{h}(s_2, u_2) \begin{vmatrix} \hat{h}(u_1, v_1) & \hat{h}(u_2, v_1) \\ \hat{h}(u_1, v_2) & \hat{h}(u_2, v_2) \end{vmatrix}, \end{aligned}$$

which is a non-identically zero polynomial on the channel gains, since $s_2 \rightsquigarrow u_1$, $s_2 \rightsquigarrow u_2$ and there are two disjoint paths P_{u_1, v_1} and P_{u_2, v_2} . Thus M is invertible with probability 1. Since we also have that $\hat{h}(s_2, u_1)\hat{h}(u_1, v_2) \neq 0$ and $\hat{h}(s_2, u_2)\hat{h}(u_2, v_2) \neq 0$ with probability 1, we are guaranteed that if we choose $y_1 \neq 0$ and $y_2 \neq 0$ such that $F_{2,2} = \hat{h}(s_2, u_1)\hat{h}(u_1, v_2)y_1 + \hat{h}(s_2, u_2)\hat{h}(u_2, v_2)y_2 = 0$, then $F_{1,1} \neq 0$, $F_{1,2} \neq 0$ and $F_{2,1} \neq 0$. Notice that, if $F_{1,2} = \hat{h}(s_2, u_1)\hat{h}(u_1, v_1)y_1 + \hat{h}(s_2, u_2)\hat{h}(u_2, v_1)y_2$ were zero, we would contradict the fact that the system $M\mathbf{y} = \mathbf{0}$ only has $\mathbf{y} = \mathbf{0}$ as a solution. Therefore, we have that the end-to-end transfer matrix can be expressed as

$$\begin{aligned} &\begin{bmatrix} 0 & \hat{h}(v_2, d_1) \\ \hat{h}(v_1, d_2) & \hat{h}(v_2, d_2) \end{bmatrix} \begin{bmatrix} x_1 & 0 \\ 0 & x_2 \end{bmatrix} \begin{bmatrix} \alpha & \beta \\ \gamma & 0 \end{bmatrix} \\ &= \begin{bmatrix} \hat{h}(v_2, d_1)\gamma x_2 & 0 \\ \hat{h}(v_1, d_2)\alpha x_1 + \hat{h}(v_2, d_2)\gamma x_2 & \hat{h}(v_1, d_2)\beta x_1 \end{bmatrix}, \end{aligned}$$

where $\alpha \neq 0$, $\beta \neq 0$ and $\gamma \neq 0$. Therefore, since $\hat{h}(v_2, d_1)$, $\hat{h}(v_1, d_2)$ and $\hat{h}(v_2, d_2)$ are all non-zero with probability 1, we can choose x_1 and x_2 non-zero to make the end-to-end transfer matrix diagonal with non-zero diagonal entries. This concludes the achievability proof for the case in which we have a grail subnetwork and thus we conclude all cases in which $D_\Sigma = 2$ is achievable.

VI. NETWORKS WITH 3/2 DEGREES-OF-FREEDOM

In this section, we prove that if our network $\mathcal{N}$ does not fall into cases (A), (A'), (B) and (B'), then we have $D_\Sigma = \frac{3}{2}$. We start by defining two main categories of networks which belong to (C). If $\mathcal{N}$ does not contain a node v whose removal disconnects d_i from both sources and s_i from both terminals, for $i \in \{1, 2\}$ (i.e., $\mathcal{N}$ is not in (A)), then, from our discussion in V-B, we know that we must have one of the three structures in Figure 4. Moreover, if the network does not contain such a node v and does not contain two disjoint paths P_{s_1, d_1} and P_{s_2, d_2} , then we are in (B'). Therefore, all networks in (C) contain two disjoint paths P_{s_1, d_1} and P_{s_2, d_2} , but do not contain any pair of disjoint paths P'_{s_1, d_1} and P'_{s_2, d_2} with manageable interference, or else we would be in case (B).

We will assume that we have two disjoint paths P_{s_1, d_1} and P_{s_2, d_2} and we will first show that we can assume that our network $\mathcal{N}$ falls into one of two cases:

- C1. $n_1(G) \geq 2$, $n_1^D = 1$, $n_2(G) = 1$ and $n_2^D = 0$.
- C2. $n_1(G) = n_1^D = 1$

We see this as follows. Since the interference on P_{s_1, d_1} and P_{s_2, d_2} is not manageable, we have that either $n_1(G) = 1$ or

$n_2(G) = 1$. Moreover, we must also have either $n_1^D = 1$ or $n_2^D = 1$, because otherwise we can let $S = P_{s_1, d_1} \cup P_{s_2, d_2}$ and $n_1(G[S]) = n_1^D$ and $n_2(G[S]) = n_2^D$. So we assume WLOG that $n_1^D = 1$. Then, if $n_1(G) = 1$, we are in case C2. Thus, we assume $n_1(G) \geq 2$, and we must have $n_2(G) = 1$. If $n_2^D = 1$, we are again in case C2 by exchanging the names of (s_1, d_1) and (s_2, d_2) . Otherwise, if $n_2^D = 0$, we are in case C1 (notice that $n_2^D \leq n_2(G)$).

We will provide an achievability and a converse for $D_\Sigma = \frac{3}{2}$ in each case.

A. Achievability for case C1

We will start by considering case C1. Notice that we must have a node $v_1 \notin P_{s_1, d_1} \cup P_{s_2, d_2}$ such that $v_1 \xrightarrow{I} P_{s_1, d_1}$ and thus we have a path P_{s_2, v_1} that is disjoint from P_{s_1, d_1} . We let v_m be the last node in $P_{s_2, d_2} \cap P_{s_2, v_1}$, and we have the path $P_{v_m, v_1} = P_{s_2, v_1}[v_m, v_1]$. Next we consider letting $S^* = P_{s_1, d_1} \cup P_{s_2, d_2} \cup P_{v_m, v_1}$. This guarantees that $n_1(G[S^*]) \geq 2$. Since P_{s_1, d_1} and P_{s_2, d_2} do not have manageable interference, we must have $n_2(G[S^*]) = 1$. Moreover, since $n_2^D = 0$, we conclude that we must have a node $v_2 \in P_{v_m, v_1} \setminus \{v_m\}$ such that $v_2 \xrightarrow{I} P_{s_2, d_2}$, and we must have a path $P_{s_1, v_2} \subset S^*$. It can then be seen that our network is as shown in Figure 19 up to a change in the position of the edge (v_3, v_4) . The curvy lines and the dashed lines indicate paths (which may consist of a single edge or multiple edges). Notice that we may also have $v_1 = v_2$.

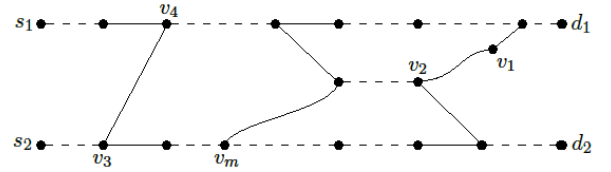


Fig. 19. Illustration of the network in case C1.

In order to achieve $D_\Sigma = \frac{3}{2}$, we will describe a scheme in which we use two different modes of operation for the network. During each mode of operation, only a subset of the nodes will be transmitting, while the others will stay silent. During the first mode of operation, one special node will store its received signals. Then, in the second mode of operation, it will forward the stored signals. We will consider two subcases, according to the position of edge (v_3, v_4) with respect to v_2 .

1) $\ell(v_3) < \ell(v_2)$: In this case, our “special node” will be the node from P_{s_2, d_2} in $V_{\ell(v_2)}$. In the first mode of operation, it will function as a virtual destination d'_2 . Node d'_2 and any node $u \in P_{s_2, d_2}$ such that $\ell(u) \geq \ell(d'_2)$ will stay silent during Mode 1. Then we notice that the two disjoint paths P_{s_1, d_1} and P_{s_2, d'_2} have manageable interference. This must be the case, since $n_2(G, P_{s_2, d'_2}) = 1$, and this unique interference is caused by v_2 on a node $u \in P_{s_2, d'_2}$ such that $\ell(u) > \ell(d'_2)$, and thus $n_2(G, P_{s_2, d'_2}) = 0$. Moreover, since $\ell(v_3) < \ell(d'_2)$ and $\ell(v_m) < \ell(d'_2)$, we have $n_1(G, P_{s_1, d_1}) \geq 2$.

Therefore, by using the amplify-and-forward scheme described in V-A1, it is possible to guarantee that the transfer

matrix between (s_1, s_2) and (d_1, d'_2) is diagonal with non-zero diagonal entries. Notice that, even though d_1 and d'_2 are not in the same layer, one could create a virtual path between d'_2 and a virtual node $d''_2 \in V_r$ which does not receive nor cause any interference. Then we can use the scheme from V-A1 to guarantee that the transfer matrix between (s_1, s_2) and (d_1, d'_2) is diagonal with non-zero diagonal entries. Then it is easy to see that the same would hold for the transfer matrix between (s_1, s_2) and (d_1, d'_2) . During Mode 1, d'_2 will store its received signals.

The second mode of operation should last for the same number of time steps as the first one. In Mode 2, d'_2 will become a virtual source s'_2 . Then, we remove all the nodes from the network except those in the paths P_{s_1, d_1} and $P_{s'_2, d_2}$. Now we clearly have two disjoint paths with no interference. Therefore, it is clear that we can have the transfer matrix between (s_1, s'_2) and (d_1, d_2) be diagonal with non-zero diagonal entries. Thus, by letting node $d'_2 = s'_2$ forward each of the signals received during Mode 1 in Mode 2, it is clear that, over the two modes, we create three parallel AWGN channels, two of them between s_1 and d_1 and one of them between s_2 and d_2 . Therefore, we achieve $D_\Sigma = \frac{3}{2}$. A visual representation of the scheme is shown in Figure 20.

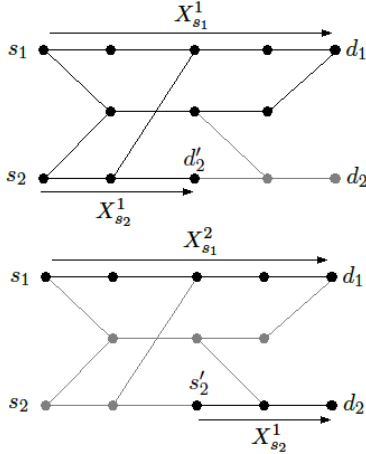


Fig. 20. Depiction of Mode 1 and Mode 2 for the achievability scheme in case C1 if $\ell(v_3) < \ell(v_2)$.

2) $\ell(v_3) \geq \ell(v_2)$: In this case, in the first mode of operation, we let the node from P_{s_1, d_1} in $V_{\ell(v_2)}$ be a virtual destination d'_1 . Then we clearly have two disjoint paths P_{s_1, d'_1} and P_{s_2, d_2} . Any node $v \notin P_{s_1, d'_1} \cup P_{s_2, d_2}$ will stay silent during Mode 1. Since we assumed that $\ell(v_3) \geq \ell(v_2)$, we cannot have any direct interferences between P_{s_1, d'_1} and P_{s_2, d_2} , or else we would contradict the fact that $n_1^D(P_{s_1, d_1}, P_{s_2, d_2}) = 1$ and $n_2^D(P_{s_1, d_1}, P_{s_2, d_2}) = 0$. Therefore, during Mode 1, we can have the transfer matrix between (s_1, s_2) and (d'_1, d_2) be diagonal with non-zero diagonal entries. During Mode 1, d'_1 will store its received signals.

The second mode of operation should last for the same number of time steps as the first one. During Mode 2, d'_1 will become a virtual source s'_1 . Any node $v \in P_{s_1, d_1}$ such that $\ell(v) < \ell(s'_1)$ will stay silent. Notice that the paths $P_{s'_1, d_1}$ and P_{s_2, d_2} have manageable interference. Therefore, by assuming

the existence of a virtual node $s'_1 \in V_1$ which is connected to s'_1 through a virtual path that does not receive nor cause any interferences, we can use the linear scheme from V-A1 to guarantee that the transfer matrix from (s'_1, s_2) to (d_1, d_2) is diagonal with non-zero diagonal entries. Thus, by letting node $d'_1 = s'_1$ forward each of the signals received during Mode 1 in Mode 2, it is clear that, over the two modes, we create three parallel AWGN channels, two of them between s_2 and d_2 and one of them between s_1 and d_1 . Therefore, we achieve $D_\Sigma = \frac{3}{2}$. A visual representation of the scheme is shown in Figure 21.

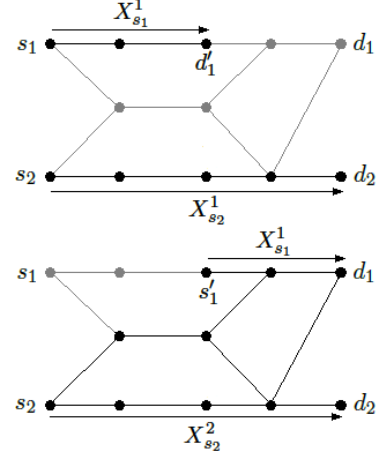


Fig. 21. Depiction of Mode 1 and Mode 2 for the achievability scheme in case C1 if $\ell(v_3) \geq \ell(v_2)$.

B. Converse for case C1

In this section, we will show that if a network falls in C1, but does not contain two disjoint paths with manageable interference, then $D_\Sigma \leq \frac{3}{2}$. We will start by naming some extra nodes which will be important to us, as shown in Figure 22. We will let v_0 be the node on P_{s_2, d_2} such that $(v_2, v_0) \in E$. From our discussion in VI-A, we know that we have a path P_{s_1, v_2} , which must be entirely contained in $S^* = P_{s_1, d_1} \cup P_{s_2, d_2} \cup P_{v_m, v_1}$. Thus, we let v_5 be the last node in $P_{s_1, d_1} \cap P_{s_1, v_2}$, and we let v_6 be its consecutive node on P_{s_1, v_2} (which must be part of P_{v_m, v_1} as well).

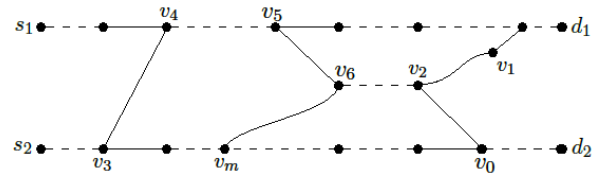


Fig. 22. Illustration of a network in case C1.

The assumption that there are no two disjoint paths with manageable interference allows us to infer some important connectivity properties about networks in case C1, illustrated in Figure 22. Next, we state and prove these properties.

P1. All paths from s_1 to d_2 contain nodes v_2 and v_0 .

It is easy to see that if we have a path P_{s_1,d_2} not containing $\{v_2, v_0\}$, then we must have a node $v_a \in P_{s_1,d_2}$ such that $v_a \xrightarrow{I} P_{s_2,d_2}$, and thus we would have $n_2(G, P_{s_2,d_2}) \geq 2$, which is a contradiction.

- P2. All paths from s_1 to d_2 contain nodes v_5 and v_6 .

First consider the path $Q_{s_2,d_2} = P_{s_2,d_2}[s_2, v_m] \oplus P_{v_m,v_1}[v_m, v_2] \oplus (v_2, v_0) \oplus P_{s_2,d_2}[v_0, d_2]$. Clearly, $Q_{s_2,d_2} \cap P_{s_1,d_1} = \emptyset$ and $v_5 \xrightarrow{I} Q_{s_2,d_2}$. If we have a path P_{s_1,d_2} not containing $\{v_5, v_6\}$ we conclude that $n_2(G, Q_{s_2,d_2}) \geq 2$. But since $n_1(G, P_{s_1,d_1}) \geq 2$ we contradict the fact that there are no two disjoint paths with manageable interference.

- P3. All paths from s_2 to d_1 contain $\{v_6, v_2\}$ or $\{v_3, v_4\}$.

Suppose there is a path P_{s_2,d_1} not containing $\{v_6, v_2\}$ nor $\{v_3, v_4\}$. Then we let $S = P_{s_1,d_1} \cup P_{s_2,d_2} \cup P_{s_2,d_1}$ and we have $n_1(G[S], P_{s_1,d_1}) \geq 2$. But since P1 and P2 imply that any path from s_1 to d_2 must contain $\{v_6, v_2\}$, and $\{v_6, v_2\} \not\subset S$, we must have $n_2(G[S], P_{s_2,d_2}) = 0$, contradicting the fact that there are no two disjoint paths with manageable interference.

- P4. The removal of v_0 disconnects d_2 from both sources.

From P1, the removal of v_0 disconnects d_2 from s_1 . So suppose the removal of v_0 does not disconnect d_2 from s_2 and we have a path Q_{s_2,d_2} not containing v_0 . We know that Q_{s_2,d_2} must be disjoint from P_{s_1,d_1} , since otherwise we would contradict the fact that the removal of v_0 disconnects d_2 from s_1 (P1). Moreover, if we let $S = P_{s_1,d_1} \cup Q_{s_2,d_2}$, since $v_0 \notin S$, we must have $n_2(G[S], Q_{s_2,d_2}) = 0$. If $n_1(G[S], P_{s_1,d_1}) \neq 1$, we contradict the assumption of no two disjoint paths with manageable interference. However, if $n_1(G[S], P_{s_1,d_1}) = 1$, we must have a direct interference from Q_{s_2,d_2} on P_{s_1,d_1} , and we will have $n_1(G[V \setminus \{v_0\}], P_{s_1,d_1}) \geq 2$ and $n_2(G[V \setminus \{v_0\}], Q_{s_2,d_2}) = 0$, and we again reach a contradiction.

- P5. The removal of v_5 disconnects s_1 from both destinations.

From P2, the removal of v_5 disconnects s_1 from d_2 . So we suppose the removal of v_5 does not disconnect s_1 from d_1 and we have a path Q_{s_1,d_1} not containing v_5 . The path Q_{s_1,d_1} must be disjoint from P_{s_2,d_2} , or else we would contradict the fact that the removal of v_5 disconnects s_1 from d_2 (P2). So first we let $S = Q_{s_1,d_1} \cup P_{s_2,d_2}$, and, since $v_5 \notin S$, we have $n_2(G[S], P_{s_2,d_2}) = 0$. If we have $n_1(G[S], Q_{s_1,d_1}) \neq 1$, we contradict the assumption of no two disjoint paths with manageable interference. However, if $n_1(G[S], Q_{s_1,d_1}) = 1$, we must have a direct interference from P_{s_2,d_2} on Q_{s_1,d_1} , and we will have $n_1(G[V \setminus \{v_5\}], Q_{s_1,d_1}) \geq 2$ and $n_2(G[V \setminus \{v_5\}], P_{s_2,d_2}) = 0$, and we again reach a contradiction.

- P6. The removal of v_2 and v_3 disconnects d_2 from both sources.

From P1, the removal of v_2 disconnects d_2 from s_1 . So suppose the removal of v_2 and v_3 does not disconnect d_2 from s_2 and we have a path Q_{s_2,d_2} not containing v_2 nor v_3 . We know that Q_{s_2,d_2} is disjoint from P_{s_1,d_1} , or else we would contradict the fact that the removal of v_2 disconnects s_1 from d_2 (P1). Then, we set $S =$

$P_{s_1,d_1} \cup Q_{s_2,d_2}$. Since $v_2, v_3 \notin S$, from P1, we must have $n_2(G[S], Q_{s_2,d_2}) = 0$, and from P3, we must have $n_1(G[S], P_{s_1,d_1}) = 0$. But this contradicts our assumption of no two disjoint paths with manageable interference.

- P7. The removal of v_2 and v_4 disconnects d_1 from both sources.

From P3, the removal of v_2 and v_4 disconnects d_1 from s_2 . Thus, we assume that we have a path Q_{s_1,d_1} not containing v_2 nor v_4 . The path Q_{s_1,d_1} must be disjoint of P_{s_2,d_2} , or else we contradict P3. Thus we set $S = Q_{s_1,d_1} \cup P_{s_2,d_2}$. Since $v_2, v_4 \notin S$, from P1, we must have $n_2(G[S], P_{s_2,d_2}) = 0$, and from P3, we must have $n_1(G[S], Q_{s_1,d_1}) = 0$. But this contradicts our assumption of no two disjoint paths with manageable interference.

- P8. All paths from s_1 or s_2 to v_2 contain v_6 .

This follows easily from P1, P2 and P3, since $v_2 \rightsquigarrow d_1$ and $v_2 \rightsquigarrow d_2$.

These properties allow us to infer the information inequalities that will build the converse proof. For these derivations, we will let $A \triangleq \{v \in V : s_2 \not\rightsquigarrow v\}$ and $B \triangleq \{v \in V : s_1 \not\rightsquigarrow v\}$, and let W_1 and W_2 be independent random variables corresponding to a uniform choice over the messages on sources s_1 and s_2 respectively. Before we formally derive the inequalities, we will describe some of the intuition that leads to them, for a specific network example, shown in Figure 23.

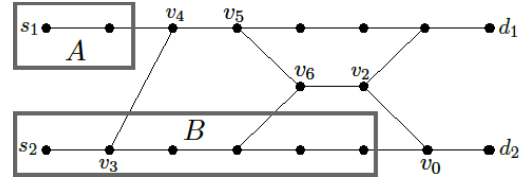


Fig. 23. Example of a network in case C1.

We will consider, for a given n , the quantities

$$\alpha \triangleq \liminf_{P \rightarrow \infty} \frac{I(Y_4^n, X_B^n; \tilde{X}_2^n)}{\frac{n}{2} \log P} \text{ and } \beta \triangleq \liminf_{P \rightarrow \infty} \frac{I(X_5^n, Y_6^n | \tilde{X}_B^n)}{\frac{n}{2} \log P}.$$

It is easy to see that $0 \leq \alpha, \beta \leq 1$. Intuitively, since all the information from the sources must go through either v_4 or the nodes in B to reach v_2 , α can be thought of as the number of useful degrees-of-freedom (i.e., carrying information about the sources) transmitted by v_2 . Similarly, β can be thought of as the number of degrees-of-freedom transmitted by v_5 , but only counting the degrees-of-freedom with information about message W_1 (since we condition on $\tilde{X}_B^n$). Based on these quantities we will state three inequalities related to the degrees-of-freedom that can be achieved, and for each one we will provide an intuitive explanation. The formal proof is omitted, but it follows from the information inequalities we will derive later based on properties P1-P8. In the sense of Definition 9, we let D_i be the degrees-of-freedom assigned to (s_i, d_i) , for $i = 1, 2$. First, we have

$$D_1 \leq \beta, \quad (15)$$

since all information from W_1 must flow through v_5 . Next, we claim that both W_1 and W_2 can be decoded from Y_4^n and

$\tilde{X}_2^n$, and thus

$$D_1 + D_2 \leq 1 + \alpha. \quad (16)$$

To see this, we first notice that, since the removal of v_4 and v_2 disconnects d_1 from $\{s_1, s_2\}$, from Y_4^n and $\tilde{X}_2^n$, W_1 can be decoded. Then, W_1 can be used to approximately obtain X_A^n (since the nodes in A cannot be influenced by W_2), and, by removing its contribution from Y_4^n , we can obtain a noisy version of the transmit signal from v_3 . But since all the information about W_2 must flow through v_3 , this allows one to use Y_4^n and $\tilde{X}_2^n$ to decode W_2 as well. For the third inequality we claim that, from Y_0^n , we can decode W_2 completely and $(\alpha + \beta - 1)$ degrees-of-freedom of W_1 , and thus

$$D_2 + (\alpha + \beta - 1) \leq 1. \quad (17)$$

To see this, we first notice that, since the removal of v_0 disconnects d_2 from $\{s_1, s_2\}$, from Y_0^n , we can decode W_2 , and thus obtain X_B^n approximately. By removing its contribution from Y_0^n , we obtain a noisy version of the transmit signal from node v_2 , which allows us to decode the α degrees-of-freedom transmitted by it. Now we ask ourselves how many of the α degrees-of-freedom transmitted by v_2 must be carrying information about W_1 . To answer this question, we notice that all the degrees-of-freedom transmitted by v_2 must have come through node v_6 . Since node v_6 receives β degrees-of-freedom with information about W_1 from v_5 , at most $1 - \beta$ of its degrees-of-freedom can be not about W_1 . Thus, any number of degrees-of-freedom above $1 - \beta$ that v_2 transmits, i.e., $\alpha - (1 - \beta) = \alpha + \beta - 1$, must contain information about W_1 . Finally, by adding inequalities (15), (16) and (17), we obtain $2(D_1 + D_2) \leq 3$, and therefore $D_\Sigma \leq 3/2$.

Next, we formally derive information inequalities that can be used to show that $D_\Sigma \leq 3/2$ for all networks in case C1. The intuition is similar to that of inequalities (15), (16) and (17), but the inequalities are somewhat different since they need to hold for any network in case C1. First we have

$$\begin{aligned} nR_2 &\leq I(W_2; Y_{d_2}^n) + n\epsilon_n \stackrel{(i)}{\leq} I(\tilde{X}_B^n; Y_0^n) + n\epsilon_n \\ &= I(X_2^n; \tilde{X}_B^n; Y_0^n) - I(X_2^n; Y_0^n | \tilde{X}_B^n) + n\epsilon_n \\ &\stackrel{(ii)}{\leq} \frac{n}{2} \log P + nK_3 - I(X_2^n; Y_0^n | \tilde{X}_B^n) + n\epsilon_n, \end{aligned} \quad (18)$$

where (i) follows from the Markov chain $W_2 \leftrightarrow \tilde{X}_B^n \leftrightarrow Y_0^n \leftrightarrow Y_{d_2}^n$, which is implied by P4 and the fact that $s_2 \in B$; (ii) follows from the fact that $I(X_2^n; \tilde{X}_B^n; Y_0^n)$ can be upper bounded by $h(Y_0^n) - h(N_{2,0}^n)$ by following the steps in (6), where K_3 is a positive constant, independent of P , for P sufficiently large. We also have that

$$\begin{aligned} nR_1 &\leq I(W_1; Y_{d_1}^n) + n\epsilon_n \stackrel{(i)}{\leq} I(W_1; \tilde{X}_5^n, \tilde{X}_B^n) + n\epsilon_n \\ &\stackrel{(ii)}{=} I(W_1; \tilde{X}_5^n | \tilde{X}_B^n) + n\epsilon_n \stackrel{(iii)}{\leq} I(X_5^n; \tilde{X}_5^n | \tilde{X}_B^n) + n\epsilon_n \\ &\leq I(X_5^n; Y_6^n | \tilde{X}_B^n) + I(X_5^n; \tilde{X}_5^n | \tilde{X}_B^n, Y_6^n) + n\epsilon_n \\ &\stackrel{(iv)}{=} I(X_5^n; Y_6^n | \tilde{X}_B^n) + nK_4 + n\epsilon_n, \end{aligned} \quad (19)$$

where (i) follows because P5 and the fact that $s_2 \in B$ imply that the removal of v_5 and B disconnects d_1 from both sources and thus $W_1 \leftrightarrow (\tilde{X}_5^n, \tilde{X}_B^n) \leftrightarrow Y_{d_1}^n$; (ii) follows from the fact

that $\tilde{X}_B^n$ is independent of W_1 ; (iii) follows from the fact that, given $\tilde{X}_B^n$, we have $W_1 \leftrightarrow X_5^n \leftrightarrow \tilde{X}_5^n$; (iv) follows from Lemma 1, since P2 implies that $\mathcal{I}(v_6) \setminus \{v_5\} \subset B$. To obtain the next inequalities, we consider two cases, according to the position of v_4 and v_5 .

I) $\ell(v_4) \leq \ell(v_5)$: In this case, we have

$$\begin{aligned} nR_2 &\leq I(W_2; Y_{d_2}^n) + n\epsilon_n \stackrel{(i)}{\leq} I(X_{s_2}^n; \tilde{X}_2^n, \tilde{X}_3^n) + n\epsilon_n \\ &\stackrel{(ii)}{\leq} I(X_{s_2}^n; \tilde{X}_2^n, \tilde{X}_3^n | \tilde{X}_A^n) + n\epsilon_n \\ &\leq I(X_{s_2}^n; \tilde{X}_2^n, \tilde{X}_3^n, Y_4^n | \tilde{X}_A^n) + n\epsilon_n \\ &= I(X_{s_2}^n; \tilde{X}_3^n, Y_4^n | \tilde{X}_A^n) + I(X_{s_2}^n; \tilde{X}_2^n | \tilde{X}_A^n, \tilde{X}_3^n, Y_4^n) + n\epsilon_n \\ &\leq I(X_{s_2}^n; Y_4^n | \tilde{X}_A^n) + I(X_{s_2}^n; \tilde{X}_3^n | \tilde{X}_A^n, Y_4^n) \\ &\quad + I(X_{s_2}^n; \tilde{X}_2^n | \tilde{X}_A^n, Y_4^n) + n\epsilon_n \\ &\stackrel{(iii)}{\leq} I(X_{s_2}^n; Y_4^n | \tilde{X}_A^n) + nK_5 \\ &\quad + I(X_{s_2}^n; \tilde{X}_3^n; \tilde{X}_2^n | \tilde{X}_A^n, Y_4^n) + n\epsilon_n \\ &\stackrel{(iv)}{\leq} I(X_B^n; Y_4^n | \tilde{X}_A^n) \\ &\quad + I(X_{s_2}^n; \tilde{X}_3^n; \tilde{X}_2^n | \tilde{X}_A^n, Y_4^n) + nK_5 + n\epsilon_n \\ &\leq I(X_B^n; Y_4^n | \tilde{X}_A^n) + I(X_B^n; \tilde{X}_2^n | \tilde{X}_A^n, Y_4^n) \\ &\quad + I(X_{s_2}^n; \tilde{X}_3^n; \tilde{X}_2^n | \tilde{X}_A^n, Y_4^n, X_B^n) + nK_5 + n\epsilon_n \\ &\stackrel{(v)}{\leq} I(X_B^n; Y_4^n | \tilde{X}_A^n) + I(X_B^n; \tilde{X}_2^n | \tilde{X}_A^n, Y_4^n) + nK_5 + n\epsilon_n \\ &\leq I(X_B^n; Y_4^n, \tilde{X}_2^n | \tilde{X}_A^n) + nK_5 + n\epsilon_n, \end{aligned} \quad (20)$$

where (i) follows because P6 implies the Markov chain $W_2 \leftrightarrow X_{s_2}^n \leftrightarrow (\tilde{X}_2^n, \tilde{X}_3^n) \leftrightarrow Y_{d_2}^n$; (ii) follows from the fact that $\tilde{X}_A^n$ is independent of $X_{s_2}^n$; (iii) follows by applying Lemma 1 to the second term, since $\ell(v_4) \leq \ell(v_5)$ implies that $\mathcal{I}(v_4) \setminus \{v_3\} \subset A$, or else we contradict P3; (iv) follows from the fact that $s_2 \in B$; and (v) follows because we have $(X_{s_2}^n, \tilde{X}_3^n) \leftrightarrow (\tilde{X}_A^n, Y_4^n, X_B^n) \leftrightarrow \tilde{X}_2^n$, since the removal of A , v_4 and B disconnects s_2 and $\mathcal{O}(v_3)$ from v_2 . This can be seen as follows. From P8, all paths from s_2 or v_3 to v_2 must contain a node in $\mathcal{I}(v_6)$. From P2, we know that $\mathcal{I}(v_6) \setminus \{v_5\} \subset B$. From P3, we know that any path from v_3 or s_2 to v_5 must contain v_4 . Finally, since $\ell(v_4) < \ell(v_6)$, we have that $v_3 \notin \mathcal{I}(v_6)$, and, therefore, any path from s_2 or $\mathcal{O}(v_3)$ to v_2 must either contain v_4 or a node in B . Notice that we had to consider $\mathcal{O}(v_3)$ instead of simply v_3 , because we have $\tilde{X}_3^n$, and not X_3^n . Next, we have that

$$\begin{aligned} nR_1 &\leq I(W_1; Y_{d_1}^n) + n\epsilon_n \stackrel{(i)}{\leq} I(W_1; Y_4^n, \tilde{X}_2^n) + n\epsilon_n \\ &\stackrel{(ii)}{\leq} I(\tilde{X}_A^n; Y_4^n, \tilde{X}_2^n) + n\epsilon_n \\ &= I(\tilde{X}_A^n, X_B^n; Y_4^n, \tilde{X}_2^n) - I(X_B^n; Y_4^n, \tilde{X}_2^n | \tilde{X}_A^n) + n\epsilon_n \\ &= I(\tilde{X}_A^n, X_B^n; Y_4^n) + I(\tilde{X}_A^n, X_B^n; \tilde{X}_2^n | Y_4^n) \\ &\quad - I(X_B^n; Y_4^n, \tilde{X}_2^n | \tilde{X}_A^n) + n\epsilon_n \\ &\stackrel{(iii)}{\leq} \frac{n}{2} \log P + nK_6 + I(\tilde{X}_A^n, X_B^n, Y_4^n; \tilde{X}_2^n) \\ &\quad - I(X_B^n; Y_4^n, \tilde{X}_2^n | \tilde{X}_A^n) + n\epsilon_n, \end{aligned}$$

where (i) follows because P7 implies the Markov chain $W_1 \leftrightarrow (Y_4^n, \tilde{X}_2^n) \leftrightarrow Y_{d_1}^n$; (ii) follows since $s_1 \in A$; (iii) follows

from the fact that $I(\tilde{X}_A^n, X_B^n; Y_4^n)$ can be upper bounded by $h(Y_4^n) - h(N_{3,4}^n)$ by following the steps in (6), where K_6 is a positive constant, independent of P , for P sufficiently large. The second term in the inequality above can be bounded as

$$\begin{aligned}
I(\tilde{X}_A^n, X_B^n; Y_4^n; \tilde{X}_2^n) &\stackrel{(i)}{\leq} I(\tilde{X}_A^n, \tilde{X}_B^n, Y_4^n; \tilde{X}_2^n) \\
&= I(\tilde{X}_B^n; \tilde{X}_2^n) + I(\tilde{X}_A^n, Y_4^n; \tilde{X}_2^n | \tilde{X}_B^n) \\
&\stackrel{(ii)}{\leq} I(\tilde{X}_B^n; Y_6^n) + I(\tilde{X}_A^n, Y_4^n; \tilde{X}_2^n | \tilde{X}_B^n) \\
&\stackrel{(iii)}{\leq} I(\tilde{X}_B^n; Y_6^n) + I(X_2^n; \tilde{X}_2^n | \tilde{X}_B^n) \\
&\leq I(X_5^n; \tilde{X}_B^n; Y_6^n) - I(X_5^n; Y_6^n | \tilde{X}_B^n) \\
&\quad + I(X_2^n; Y_0^n | \tilde{X}_B^n) + I(X_2^n; \tilde{X}_2^n | \tilde{X}_B^n, Y_0^n) \\
&\stackrel{(iv)}{\leq} I(X_5^n; \tilde{X}_B^n; Y_6^n) - I(X_5^n; Y_6^n | \tilde{X}_B^n) \\
&\quad + I(X_2^n; Y_0^n | \tilde{X}_B^n) + nK_7 \\
&\stackrel{(v)}{\leq} \frac{n}{2} \log P - I(X_5^n; Y_6^n | \tilde{X}_B^n) \\
&\quad + I(X_2^n; Y_0^n | \tilde{X}_B^n) + n(K_7 + K_8) \quad (21)
\end{aligned}$$

where (i) follows because of the Markov chain $(\tilde{X}_A^n, X_B^n, Y_4^n) \leftrightarrow (\tilde{X}_A^n, \tilde{X}_B^n, Y_4^n) \leftrightarrow \tilde{X}_2^n$; (ii) follows because P8 implies $\tilde{X}_B^n \leftrightarrow Y_6^n \leftrightarrow \tilde{X}_2^n$; (iii) follows since, given X_B^n , we have $(\tilde{X}_A^n, Y_4^n) \leftrightarrow X_2^n \leftrightarrow \tilde{X}_2^n$; (iv) follows by applying Lemma 1 to $I(X_2^n; \tilde{X}_2^n | \tilde{X}_B^n, Y_0^n)$, since $\mathcal{I}(v_0) \setminus \{v_2\} \subset B$, or else we contradict P1; (v) follows from the fact that $I(X_5^n; \tilde{X}_B^n; Y_6^n)$ can be upper bounded by $h(Y_6^n) - h(N_{5,6}^n)$ by following the steps in (6), where K_8 is a positive constant, independent of P , for P sufficiently large. Thus, we obtain

$$\begin{aligned}
nR_1 &\leq n \log P - I(X_5^n; Y_6^n | \tilde{X}_B^n) + I(X_2^n; Y_0^n | \tilde{X}_B^n) \\
&\quad - I(X_B^n; Y_4^n; \tilde{X}_2^n | \tilde{X}_A^n) + n(K_6 + K_7 + K_8) + n\epsilon_n. \quad (22)
\end{aligned}$$

II) $\ell(v_4) > \ell(v_5)$: We will obtain similar inequalities to the ones in case I. We will define $C \triangleq \mathcal{I}(v_4) \setminus \{v_2, v_3\}$ and $D \triangleq \mathcal{O}(v_3) \setminus \{v_6\}$. Then, we will let $Y_{C,4}^n = \sum_{v_c \in C} \tilde{X}_{c,4}^n$. We also let $\tilde{X}_{3,D}^n = \{\tilde{X}_{3,v_j}^n : v_j \in D\}$. Notice that $\tilde{X}_{3,D}^n = \tilde{X}_3^n$ if $v_6 \notin \mathcal{O}(v_3)$. Then we have

$$\begin{aligned}
nR_2 &\leq I(W_2; Y_{d_2}^n) + n\epsilon_n \stackrel{(i)}{\leq} I(X_{s_2}^n; \tilde{X}_2^n, \tilde{X}_{3,D}^n) + n\epsilon_n \\
&\stackrel{(ii)}{\leq} I(X_{s_2}^n; \tilde{X}_2^n, \tilde{X}_{3,D}^n | \tilde{X}_A^n) + n\epsilon_n \\
&= I(X_{s_2}^n; \tilde{X}_2^n | \tilde{X}_A^n) + I(X_{s_2}^n; \tilde{X}_{3,D}^n | \tilde{X}_A^n, \tilde{X}_2^n) + n\epsilon_n \\
&\leq I(X_{s_2}^n; \tilde{X}_2^n | \tilde{X}_A^n) \\
&\quad + I(X_{s_2}^n; \tilde{X}_{3,D}^n, \tilde{X}_{3,4}^n | \tilde{X}_A^n, \tilde{X}_2^n) + n\epsilon_n \\
&\stackrel{(iii)}{\leq} I(X_B^n; \tilde{X}_2^n | \tilde{X}_A^n) + I(X_{s_2}^n; \tilde{X}_{3,4}^n | \tilde{X}_A^n, \tilde{X}_2^n) \\
&\quad + I(X_{s_2}^n; \tilde{X}_{3,D}^n | \tilde{X}_A^n, \tilde{X}_2^n, \tilde{X}_{3,4}^n) + n\epsilon_n \\
&\stackrel{(iv)}{\leq} I(X_B^n; \tilde{X}_2^n | \tilde{X}_A^n) + I(X_{s_2}^n; \tilde{X}_{3,4}^n | \tilde{X}_A^n, \tilde{X}_2^n) + nK_9 + n\epsilon_n \\
&\stackrel{(v)}{\leq} I(X_B^n; \tilde{X}_2^n | \tilde{X}_A^n) + I(X_B^n; \tilde{X}_{3,4}^n | \tilde{X}_A^n, \tilde{X}_2^n) + nK_9 + n\epsilon_n \\
&\stackrel{(vi)}{\leq} I(X_B^n; \tilde{X}_2^n | \tilde{X}_A^n) \\
&\quad + I(X_B^n; \tilde{X}_{3,4}^n | \tilde{X}_A^n, \tilde{X}_2^n, \tilde{X}_C^n) + nK_9 + n\epsilon_n \quad (23)
\end{aligned}$$

where (i) follows because P6 implies that the removal of $\mathcal{O}(v_3)$ and v_2 disconnects d_2 from both sources. Then, since P1 implies that all paths from v_6 to d_2 contain v_2 , we know that the removal of D and v_2 also disconnects d_2 from both sources, and we have the Markov chain $W_2 \leftrightarrow X_{s_2}^n \leftrightarrow (\tilde{X}_2^n, \tilde{X}_{3,D}^n) \leftrightarrow Y_{d_2}^n$; (ii) follows from the fact that $\tilde{X}_A^n$ is independent of $X_{s_2}^n$; (iii) follows since $s_2 \in B$; (iv) follows by applying Lemma 1 to $I(X_{s_2}^n; \tilde{X}_{3,D}^n | \tilde{X}_A^n, \tilde{X}_2^n, \tilde{X}_{3,4}^n)$, since, in case II, if $u \in D \setminus \{v_4\}$, then $u \not\sim v_2$, or else we contradict P8; (v) follows since $s_2 \in B$; and (vi) follows from the fact that, given $\tilde{X}_2^n$ and $\tilde{X}_A^n$, $\tilde{X}_C^n$ is independent of X_B^n . This is true because P3 implies that any path from a node in B to a node in C must contain v_2 , and, thus, the removal of A and v_2 disconnects C from B and both sources. Notice that (vi) is only non-trivial in the cases where $C \not\subset A$ (when $\ell(v_4) > \ell(v_1) + 1$). Next, we have that

$$\begin{aligned}
nR_1 &\leq I(W_1; Y_{d_1}^n) + n\epsilon_n \stackrel{(i)}{\leq} I(W_1; \tilde{X}_{3,4}^n + Y_{C,4}^n, \tilde{X}_2^n) + n\epsilon_n \\
&\stackrel{(ii)}{\leq} I(\tilde{X}_A^n; \tilde{X}_{3,4}^n + Y_{C,4}^n, \tilde{X}_2^n) + n\epsilon_n \\
&= I(\tilde{X}_A^n; \tilde{X}_2^n) + I(\tilde{X}_A^n; \tilde{X}_{3,4}^n + Y_{C,4}^n | \tilde{X}_2^n) + n\epsilon_n \\
&\leq I(\tilde{X}_A^n, \tilde{X}_C^n; \tilde{X}_{3,4}^n + Y_{C,4}^n | \tilde{X}_2^n) + I(\tilde{X}_A^n; \tilde{X}_2^n) + n\epsilon_n \\
&= I(\tilde{X}_A^n, \tilde{X}_C^n, X_B^n; \tilde{X}_{3,4}^n + Y_{C,4}^n | \tilde{X}_2^n) \\
&\quad - I(X_B^n; \tilde{X}_{3,4}^n + \tilde{Y}_{C,4}^n | \tilde{X}_2^n, \tilde{X}_A^n, \tilde{X}_C^n) \\
&\quad + I(\tilde{X}_A^n, X_B^n; \tilde{X}_2^n) - I(X_B^n; \tilde{X}_2^n | \tilde{X}_A^n) + n\epsilon_n \\
&\leq I(\tilde{X}_A^n, \tilde{X}_C^n, X_B^n; \tilde{X}_2^n; \tilde{X}_{3,4}^n + \tilde{Y}_{C,4}^n) \\
&\quad - I(X_B^n; \tilde{X}_{3,4}^n | \tilde{X}_2^n, \tilde{X}_A^n, \tilde{X}_C^n) \\
&\quad + I(\tilde{X}_A^n, X_B^n; \tilde{X}_2^n) - I(X_B^n; \tilde{X}_2^n | \tilde{X}_A^n) + n\epsilon_n \\
&\stackrel{(iii)}{\leq} \frac{n}{2} \log P + nK_{10} + I(\tilde{X}_A^n, X_B^n; \tilde{X}_2^n) \\
&\quad - I(X_B^n; \tilde{X}_{3,4}^n | \tilde{X}_2^n, \tilde{X}_A^n, \tilde{X}_C^n) - I(X_B^n; \tilde{X}_2^n | \tilde{X}_A^n) + n\epsilon_n,
\end{aligned}$$

where (i) follows because P7 implies the Markov chain $W_1 \leftrightarrow (Y_4^n, \tilde{X}_2^n) \leftrightarrow Y_{d_1}^n$, and $(Y_4^n, \tilde{X}_2^n)$ can be constructed from $(\tilde{X}_{3,4}^n + Y_{C,4}^n, \tilde{X}_2^n)$ (notice that it may be the case that $Y_4^n = \tilde{X}_{3,4}^n + \tilde{Y}_{C,4}^n + \tilde{X}_{2,4}^n$, if $v_2 \in \mathcal{I}(v_4)$); (ii) follows since $s_1 \in A$; (iii) follows from the fact that $I(\tilde{X}_A^n, \tilde{X}_C^n, X_B^n; \tilde{X}_2^n; \tilde{X}_{3,4}^n + Y_{C,4}^n)$ can be upper bounded by $h(\tilde{X}_{3,4}^n + Y_{C,4}^n) - h(N_{3,4}^n)$ by following the steps in (6), where K_{10} is a positive constant, independent of P , for P sufficiently large. The second term in the inequality above can be bounded as

$$\begin{aligned}
I(\tilde{X}_A^n, X_B^n; \tilde{X}_2^n) &\leq I(\tilde{X}_A^n, \tilde{X}_B^n; \tilde{X}_2^n) \\
&= I(\tilde{X}_B^n; \tilde{X}_2^n) + I(\tilde{X}_A^n; \tilde{X}_2^n | \tilde{X}_B^n) \\
&\leq I(\tilde{X}_B^n; Y_6^n) + I(X_2^n; \tilde{X}_2^n | \tilde{X}_B^n) \\
&\leq I(X_5^n; \tilde{X}_B^n; Y_6^n) - I(X_5^n; Y_6^n | \tilde{X}_B^n) \\
&\quad + I(X_2^n; Y_0^n | \tilde{X}_B^n) + nK_{11} \\
&\leq \frac{n}{2} \log P - I(X_5^n; Y_6^n | \tilde{X}_B^n) + I(X_2^n; Y_0^n | \tilde{X}_B^n) \\
&\quad + n(K_{11} + K_{12})
\end{aligned}$$

where the inequalities are justified as in (21). Therefore, we

obtain

$$\begin{aligned} nR_1 &\leq n \log P - I(X_5^n; Y_6^n | \tilde{X}_B^n) + I(X_2^n; Y_0^n | \tilde{X}_B^n) \\ &\quad - I(X_B^n; \tilde{X}_{3,4}^n | \tilde{X}_2^n, \tilde{X}_A^n, \tilde{X}_C^n) \\ &\quad - I(X_B^n; \tilde{X}_2^n | \tilde{X}_A^n) + n(K_{10} + K_{11} + K_{12}) + n\epsilon_n. \end{aligned} \quad (24)$$

Finally, by adding equations (18), (19), (20) and (22) for case I, and (18), (19), (23) and (24) for case II, we obtain

$$\begin{aligned} 2n(R_1 + R_2) &\leq \frac{3n}{2} \log P + 6nK_{\max} + n\epsilon_n \\ \Rightarrow \frac{R_1 + R_2}{\frac{1}{2} \log P} &\leq \frac{3}{2} + \frac{6K_{\max} + \epsilon_n}{\log P}, \end{aligned}$$

where $K_{\max} = \max_j K_j$. Thus, as we let $n \rightarrow \infty$ and then $P \rightarrow \infty$, we obtain

$$D_\Sigma \leq \frac{3}{2}.$$

We now proceed to considering C2. We will show that if our network $\mathcal{N}$ does not fall in cases (A), (A'), (B), and (B'), then $D_\Sigma = \frac{3}{2}$.

C. Achievability for case C2

In this section, we will show that if we are in C2 and no edge as in (A') exists, then we can also achieve $\frac{3}{2}$ degrees-of-freedom. We start by proving properties about the connectivity of our network, if we are in C2. Notice that, if for some choice of two disjoint paths P'_{s_1,d_1} and P'_{s_2,d_2} we are in C1, our previous result shows that $D_\Sigma = \frac{3}{2}$. Therefore, we may assume that for no choice of two disjoint paths we are in C1. So we suppose we have two disjoint paths P_{s_1,d_1} and P_{s_2,d_2} , but no two disjoint paths with manageable interference. In addition, we assume that we do not have an edge as in (A'). Since we are in C2, we have that $n_1(G, P_{s_1,d_1}) = n_1^D(P_{s_2,d_2}, P_{s_1,d_1}) = 1$ and we let $(v_2, v_1) \in E$ be the unique edge such that $v_2 \in P_{s_2,d_2}$ and $v_1 \in P_{s_1,d_1}$.

P1. All paths from s_2 to d_1 contain v_2 and v_1 .

If we have a path P_{s_2,d_1} not containing $\{v_2, v_1\}$, then we must have $n_1(G, P_{s_1,d_1}) \geq 2$, thus contradicting the fact that we are in C2.

P2. There exists a path Q_{s_i,d_i} such that $v_i \notin Q_{s_i,d_i}$, and $Q_{s_i,d_i} \cap P_{s_i,d_i} = \emptyset$, for $i = 1$ or 2 .

Since we have no edge as in (A'), we may assume that either the removal of v_1 does not disconnect d_1 from both sources, or the removal of v_2 does not disconnect s_2 from both destinations. However, from P1, the removal of v_1 or v_2 disconnects s_2 from d_1 . Therefore, we must have a path Q_{s_i,d_i} such that $v_i \notin Q_{s_i,d_i}$, for $i = 1$ or 2 . Moreover, if Q_{s_i,d_i} is not disjoint of P_{s_i,d_i} , we would contradict P1, since there would be a path $P_{s_2,d_1} \subset Q_{s_i,d_i} \cup P_{s_i,d_i}$ and $v_i \notin Q_{s_i,d_i} \cup P_{s_i,d_i}$.

P3. If $i = 1$, we have $n_1^D(P_{s_2,d_2}, Q_{s_1,d_1}) = 0$ and $n_2^D(Q_{s_1,d_1}, P_{s_2,d_2}) = 1$, and if $i = 2$, we have $n_1^D(Q_{s_2,d_2}, P_{s_1,d_1}) = 0$ and $n_2^D(P_{s_1,d_1}, Q_{s_2,d_2}) = 1$. Since $v_i \notin Q_{s_i,d_i} \cup P_{s_i,d_i}$, we must have $n_1^D(P_{s_2,d_2}, Q_{s_1,d_1}) = 0$ (if $i = 1$) or $n_1^D(Q_{s_2,d_2}, P_{s_1,d_1}) = 0$ (if $i = 2$), or else we would have a path from s_2 to d_1 not containing

v_i , and we would contradict P1. Then, since Q_{s_i,d_i} and P_{s_i,d_i} do not have manageable interference, we must have $n_2^D(Q_{s_1,d_1}, P_{s_2,d_2}) = 1$ (if $i = 1$) and $n_2^D(P_{s_1,d_1}, Q_{s_2,d_2}) = 1$ (if $i = 2$).

Since $n_2^D(Q_{s_1,d_1}, P_{s_2,d_2}) = 1$ (if $i = 1$) or $n_2^D(P_{s_1,d_1}, Q_{s_2,d_2}) = 1$ (if $i = 2$), we can assume we have an edge $(v_3, v_4) \in E$ such that $v_{2+i} \in Q_{s_i,d_i}$ and $v_{2+i} \in P_{s_i,d_i}$. Then we have the following properties.

P4. All paths from s_1 to d_2 contain v_3 and v_4 .

Suppose we have a path P_{s_1,d_2} such that $\{v_3, v_4\} \not\subset P_{s_1,d_2}$. This implies that $n_2(G, P_{s_2,d_2}) \geq 2$ if $i = 1$ and $n_2(G, Q_{s_2,d_2}) \geq 2$, if $i = 2$. From P3 we have that $n_1^D(P_{s_2,d_2}, Q_{s_1,d_1}) = 0$ (if $i = 1$) or $n_1^D(Q_{s_2,d_2}, P_{s_1,d_1}) = 0$ (if $i = 2$). Therefore, paths Q_{s_i,d_i} and P_{s_i,d_i} may not fall in C2 (not even by exchanging (s_1, d_1) and (s_2, d_2)), and must fall in C1. Since we know that, for networks in C1, $D_\Sigma = \frac{3}{2}$, we may disregard such cases.

P5. There exists a path Z_{s_i,d_i} such that $v_{2+i} \notin Z_{s_i,d_i}$, and $Z_{s_i,d_i} \cap P_{s_i,d_i} = \emptyset$.

Since we are not in (A'), either the removal of v_4 does not disconnect d_2 from both sources, or the removal of v_3 does not disconnect s_1 from both destinations. From P4, we know that the removal of v_3 or v_4 disconnects s_1 from d_2 . Thus we must either have a path Z_{s_i,d_i} such that $v_{2+i} \notin Z_{s_i,d_i}$ or a path Z_{s_i,d_i} such that $v_{2+i} \notin Z_{s_i,d_i}$. If we have a path Z_{s_i,d_i} such that $v_{2+i} \notin Z_{s_i,d_i}$, then Z_{s_i,d_i} may not intersect Q_{s_i,d_i} , since that would imply the existence of a path from s_1 to d_2 not containing $\{v_3, v_4\}$ and we would contradict P4. Moreover, we must have $n_1^D(Z_{s_2,d_2}, Q_{s_1,d_1}) = n_2^D(Q_{s_1,d_1}, Z_{s_2,d_2}) = 0$ (if $i = 1$) or $n_1^D(Q_{s_2,d_2}, Z_{s_1,d_1}) = n_2^D(Z_{s_1,d_1}, Q_{s_2,d_2}) = 0$ (if $i = 2$). Otherwise, since $v_i, v_{2+i} \notin Q_{s_i,d_i} \cup Z_{s_i,d_i}$, we would contradict either P1 or P4. But this means that Q_{s_i,d_i} and Z_{s_i,d_i} have manageable interference, which is a contradiction. Therefore, we have a path Z_{s_i,d_i} such that $v_{2+i} \notin Z_{s_i,d_i}$. The fact that $Z_{s_i,d_i} \cap P_{s_i,d_i} = \emptyset$ follows since otherwise we would have a path from s_1 to d_2 not containing v_{2+i} .

P6. If $i = 1$, we have $n_1^D(P_{s_2,d_2}, Z_{s_1,d_1}) = 1$ and $n_2^D(Z_{s_1,d_1}, P_{s_2,d_2}) = 0$, and if $i = 2$, we have $n_1^D(Z_{s_2,d_2}, P_{s_1,d_1}) = 1$ and $n_2^D(P_{s_1,d_1}, Z_{s_2,d_2}) = 0$.

Since $v_{2+i} \notin Z_{s_i,d_i} \cup P_{s_i,d_i}$, we must have $n_2^D(Z_{s_1,d_1}, P_{s_2,d_2}) = 0$ (if $i = 1$) or $n_2^D(P_{s_1,d_1}, Z_{s_2,d_2}) = 0$ (if $i = 2$), or else we would have a path from s_1 to d_2 not containing v_{2+i} , and we would contradict P4. Then, since Z_{s_i,d_i} and P_{s_i,d_i} do not have manageable interference, we must have $n_1^D(P_{s_2,d_2}, Z_{s_1,d_1}) = 1$ (if $i = 1$) and $n_1^D(Z_{s_2,d_2}, P_{s_1,d_1}) = 1$ (if $i = 2$).

Since $n_1^D(P_{s_2,d_2}, Z_{s_1,d_1}) = 1$ (if $i = 1$) and $n_1^D(Z_{s_2,d_2}, P_{s_1,d_1}) = 1$ (if $i = 2$), we can assume we have an edge $(v_6, v_5) \in E$ such that $v_{4+i} \in Z_{s_i,d_i}$ and $v_{4+i} \in P_{s_i,d_i}$. However, we claim that we must have $v_6 = v_2$ and $v_5 = v_1$. If $v_i \in Z_{s_i,d_i}$ this is obvious because $v_i \in P_{s_i,d_i}$. If $v_i \notin Z_{s_i,d_i}$, then, if $(v_6, v_5) \neq (v_2, v_1)$, we would have a path from s_2 to d_1 not containing v_i , thus contradicting P1.

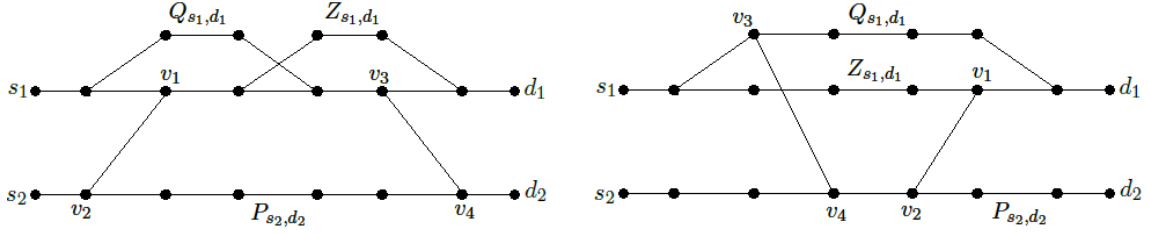


Fig. 24. Examples of networks in case C2.

Next, we notice that we can assume WLOG that $i = 1$. If $i = 2$, we can first switch the names of (s_1, d_1) and (s_2, d_2) . Then we also switch the names of Z_{s_1, d_1} and Q_{s_1, d_1} , and of (v_2, v_1) and (v_3, v_4) , and we obtain the case where $i = 1$. Thus, from now on we assume $i = 1$. We will build our achievability scheme based on the paths Z_{s_1, d_1} , Q_{s_1, d_1} and P_{s_2, d_2} , an edge (v_2, v_1) such that $v_2 \in P_{s_2, d_2}$ and $v_1 \in Z_{s_1, d_1}$ but $v_1 \notin Q_{s_1, d_1}$, and an edge (v_3, v_4) such that $v_4 \in P_{s_2, d_2}$ and $v_3 \in Q_{s_1, d_1}$ but $v_3 \notin Z_{s_1, d_1}$. Two examples of networks in C2 that satisfy P1-P6 for $i = 1$ are shown in Figure 24.

We will now consider two cases and provide a scheme to achieve $\frac{3}{2}$ degrees-of-freedom in each case. Our schemes will once more be based on using two modes of operation and having nodes store the received signals during the first mode of operation and use them during the second mode of operation.

1) $\ell(v_3) \geq \ell(v_1)$: In Mode 1, we let the node from P_{s_2, d_2} in $V_{\ell(v_1)}$ be a virtual destination d'_2 . Any node $v \in P_{s_2, d_2}$ such that $\ell(v) \geq \ell(d'_2)$ will stay silent during Mode 1. Then we notice that the two disjoint paths Q_{s_1, d_1} and P_{s_2, d'_2} have no direct edge between them and thus have manageable interference. Therefore, it is possible to guarantee that the transfer matrix between (s_1, s_2) and (d_1, d'_2) is diagonal with non-zero diagonal entries. During Mode 1, d'_2 will store its received signals.

The second mode of operation should last for the same number of time steps as the first one. In Mode 2, d'_2 will become a virtual source s'_2 . Then, we remove all the nodes from the network except those in the paths Z_{s_1, d_1} and $P_{s'_2, d_2}$. We again have two disjoint paths with no direct interference. Therefore, we can have the transfer matrix between (s_1, s'_2) and (d_1, d_2) be diagonal with non-zero diagonal entries. Thus, by letting node $d'_2 = s'_2$ forward each of the signals received during Mode 1 in Mode 2, it is clear that, over the two modes, we create three parallel AWGN channels, two of them between s_1 and d_1 and one of them between s_2 and d_2 . Therefore, we achieve $D_\Sigma = \frac{3}{2}$. A visual representation of the scheme is shown in Figure 25.

2) $\ell(v_3) < \ell(v_1)$: In Mode 1, we let v_1 be a virtual destination d'_2 . Then we consider the path $P_{s_2, d'_2} = P_{s_2, d_2}[s_2, v_2] \oplus (v_2, v_1)$. Then we notice that Q_{s_1, d_1} and P_{s_2, d'_2} are disjoint paths. Moreover, we claim that if $v_1 = d'_2$ stays silent, Q_{s_1, d_1} and P_{s_2, d'_2} have manageable interference. We must have $n_1(G, Q_{s_1, d_1}) = 0$, since otherwise we would have a path from s_2 to d_1 not containing v_1 , and we would contradict P1. If $\ell(v_4) < \ell(v_1)$, then $\ell(v_4) \leq \ell(v_2)$ and the edge (v_3, v_4) will guarantee that $n_2^D(Q_{s_1, d_1}, P_{s_2, d'_2}) \geq 1$. Moreover, since we have a path $Z_{s_1, d'_2} = Z_{s_1, d_1}[s_1, v_1]$ not containing v_3 ,

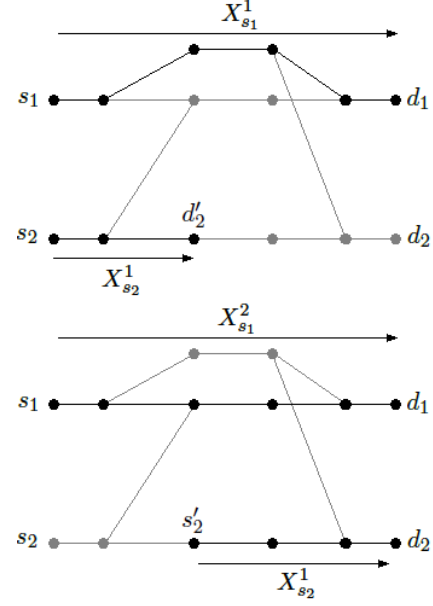


Fig. 25. Depiction of Mode 1 and Mode 2 for the achievability scheme in case C2 if $\ell(v_3) \geq \ell(v_1)$.

we must have $n_2(G, P_{s_2, d'_2}) \geq 2$. If $\ell(v_4) = \ell(v_1)$, then (v_3, v_4) will not cause a direct interference from Q_{s_1, d_1} to P_{s_2, d'_2} . Then, if we have $n_2^D(Q_{s_1, d_1}, P_{s_2, d'_2}) = 0$, Q_{s_1, d_1} and P_{s_2, d'_2} have manageable interference. If $n_2^D(Q_{s_1, d_1}, P_{s_2, d'_2}) = 1$, the direct interference must be due to an edge (v_3, v_1) so that $v_3 \xrightarrow{I} P_{s_2, d'_2}$. Otherwise, that would contradict the fact that $n_2^D(Q_{s_1, d_1}, P_{s_2, d_2}) = 1$. Therefore, the fact that we have a path Z_{s_1, d'_2} not containing v_3 guarantees that $n_2(G, P_{s_2, d'_2}) \geq 2$. We conclude that, in any case, Q_{s_1, d_1} and P_{s_2, d'_2} have manageable interference. Therefore, during Mode 1, it is possible to use an amplify-and-forward scheme which guarantees that the transfer matrix between (s_1, s_2) and (d_1, d'_2) is diagonal with non-zero diagonal entries. During Mode 1, d'_2 will store its received signals.

The second mode of operation should last for the same number of time steps as the first one. We will remove all nodes except those in Z_{s_1, d_1} and P_{s_2, d_2} . In Mode 2, s_2 will transmit the same signals it transmitted during Mode 1, while s_1 will transmit new signals. The only interference between the two paths happens through the edge (v_2, v_1) . However, node v_1 received, during Mode 1, scaled versions of the transmitted signals at s_2 . Therefore, by using the signals received during Mode 1, v_1 is able to remove the interference due to s_2 from its

received signal during Mode 2. Hence we can guarantee that the transfer matrix between (s_1, s_2) and (d_1, d_2) during Mode 2 is diagonal with non-zero diagonal entries. Over the two modes, we again create three parallel AWGN channels, two of them between s_1 and d_1 and one of them between s_2 and d_2 . Therefore, we achieve $D_\Sigma = \frac{3}{2}$. A visual representation of the scheme is shown in Figure 26.

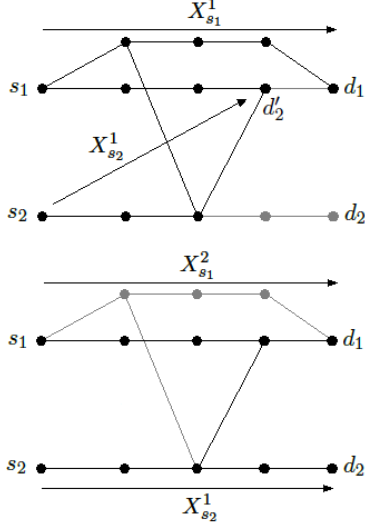


Fig. 26. Depiction of Mode 1 and Mode 2 for the achievability scheme in case C2 when $\ell(v_3) < \ell(v_1)$.

D. Converse for case C2

In this section, we will show that if our network falls in C2, and does not fall into (A), (A'), (B), (B') nor C1, then $D_\Sigma \leq \frac{3}{2}$. We will start by deriving additional connectivity properties, under the assumption that properties P1 to P6 are satisfied for $i = 1$.

P7. The removal of v_4 disconnects d_2 from both sources

From P4, we know that the removal of v_4 disconnects d_2 from s_1 . If the removal of v_4 does not disconnect d_2 from s_2 , then we must have a path Q_{s_2, d_2} not containing v_4 . We have that Q_{s_2, d_2} may not intersect Q_{s_1, d_1} , since that would imply the existence of a path from s_1 to d_2 not containing $\{v_3, v_4\}$ and we would contradict P4. Moreover, we must have $n_1^D(Q_{s_2, d_2}, Q_{s_1, d_1}) = n_2^D(Q_{s_1, d_1}, Z_{s_2, d_2}) = 0$. Otherwise, since $v_1, v_4 \notin Q_{s_1, d_1} \cup Q_{s_2, d_2}$, we would contradict either P1 or P4. But this means that Q_{s_1, d_1} and Q_{s_2, d_2} have manageable interference, which is a contradiction.

P8. The removal of v_2 disconnects s_2 from both destinations. From P1, we know that the removal of v_2 disconnects s_2 from d_1 . If the removal of v_2 does not disconnect d_2 from s_2 , then we must have a path Z_{s_2, d_2} not containing v_2 . We have that Z_{s_2, d_2} may not intersect Z_{s_1, d_1} , or else we would have a path P_{s_2, d_1} not containing v_2 , thus contradicting P1. Moreover, we must have $n_1^D(Z_{s_2, d_2}, Z_{s_1, d_1}) = n_2^D(Z_{s_1, d_1}, Z_{s_2, d_2}) = 0$. Otherwise, since $v_2, v_3 \notin Z_{s_1, d_1} \cup Z_{s_2, d_2}$, we would contradict either

P1 or P4. Therefore Z_{s_1, d_1} and Z_{s_2, d_2} have manageable interference, which is a contradiction.

P9. The removal of v_1 and v_3 disconnects d_1 from both sources

From P1, the removal of v_1 disconnects d_1 from s_2 . Thus we assume that the removal of v_1 and v_3 does not disconnect d_1 from s_1 , and we have a path M_{s_1, d_1} which does not contain v_1 nor v_3 . Then we have that $M_{s_1, d_1} \cap P_{s_2, d_2} = \emptyset$, or else we would have a path from s_2 to d_1 not containing v_1 , thus contradicting P1. Moreover, P1 and the fact that $v_1 \notin M_{s_1, d_1} \cup P_{s_2, d_2}$ imply that $n_1^D(P_{s_2, d_2}, M_{s_1, d_1}) = 0$. Likewise, P4 and the fact that $v_3 \notin M_{s_1, d_1} \cup P_{s_2, d_2}$ imply that $n_2^D(M_{s_1, d_1}, P_{s_2, d_2}) = 0$, and thus M_{s_1, d_1} and P_{s_2, d_2} have manageable interference, which is a contradiction.

P10. There is no path from v_1 to v_3

Suppose $v_1 \rightsquigarrow v_3$. Then we must have $\ell(v_1) < \ell(v_3)$. We will show that our network must contain a grail subnetwork, and must be in (B'). The network on the left of Figure 24 is an example. We consider paths $P_{s_2, d_1} = P_{s_2, d_2}[s_2, v_2] \oplus (v_2, v_1) \oplus Z_{s_1, d_1}[v_1, d_1]$ and $P_{s_1, d_2} = Q_{s_1, d_1}[s_1, v_3] \oplus (v_3, v_4) \oplus P_{s_2, d_2}[v_4, d_2]$. We claim that P_{s_1, d_2} and P_{s_2, d_1} must be disjoint. Since $\ell(v_1) < \ell(v_3)$, we must have $\ell(v_2) < \ell(v_4)$. Thus, $P_{s_2, d_2}[s_2, v_2]$ and $P_{s_2, d_2}[v_4, d_2]$ must be disjoint. Therefore, P_{s_2, d_1} and P_{s_1, d_2} may only intersect if $Z_{s_1, d_1}[v_1, d_1]$ and $Q_{s_1, d_1}[s_1, v_3]$ intersect. However, since $v_1 \notin Q_{s_1, d_1}[s_1, v_3]$ and $v_3 \notin Z_{s_1, d_1}[v_1, d_1]$, it is easy to see that if $Q_{s_1, d_1}[s_1, v_3] \cap Z_{s_1, d_1}[v_1, d_1] \neq \emptyset$, then there exists a path from s_1 to d_1 which does not contain v_1 nor v_3 , thus contradicting P9. Therefore, if we let $w_a = v_1 \in P_{s_2, d_1}$ and $w_b = v_3 \in P_{s_1, d_2}$, we have $s_1 \rightsquigarrow w_a$, $w_a \rightsquigarrow w_b$ and $w_b \rightsquigarrow d_2$, which satisfies the description of the grail subnetwork, given in V-B2, by exchanging (s_1, d_1) and (s_2, d_2) . Therefore, if $v_1 \rightsquigarrow v_3$, we are in case (B'), and we may assume $v_1 \not\rightsquigarrow v_3$.

We may now prove that under properties P1 through P10, $D_\Sigma \leq \frac{3}{2}$. We will derive information inequalities, as we did for C1. Once more, we let W_1 and W_2 be independent random variables corresponding to a uniform choice over the messages on sources s_1 and s_2 respectively, and we let $A \triangleq \{v \in V : s_2 \not\rightsquigarrow v\}$ and $B \triangleq \{v \in V : s_1 \not\rightsquigarrow v\}$. First we have

$$\begin{aligned} nR_2 &\leq I(W_2; Y_{d_2}^n) + n\epsilon_n \\ &\stackrel{(i)}{\leq} I(\tilde{X}_B^n; Y_4^n) + n\epsilon_n = I(\tilde{X}_B^n, X_3^n; Y_4^n) \\ &\quad - I(X_3^n; Y_4^n | \tilde{X}_B^n) + n\epsilon_n \\ &\stackrel{(ii)}{\leq} \frac{n}{2} \log P + nK_{13} - I(X_3^n; Y_4^n | \tilde{X}_B^n) + n\epsilon_n, \end{aligned} \quad (25)$$

where (i) follows from the Markov chain $W_2 \leftrightarrow \tilde{X}_B^n \leftrightarrow Y_4^n \leftrightarrow Y_{d_2}^n$, which is implied by P7 and the fact that $s_2 \in B$; (ii) follows from the fact that $I(\tilde{X}_B^n, X_3^n; Y_4^n)$ can be upper bounded by $h(Y_4^n) - h(N_{3,4}^n)$ by following the steps in (6), where K_{13} is a constant, independent of P , for P sufficiently

large. Next, we have

$$\begin{aligned}
nR_2 &\leq I(W_2; Y_{d_2}^n) + n\epsilon_n \\
&\stackrel{(i)}{\leq} I(W_2; \tilde{X}_2^n, \tilde{X}_A^n) + n\epsilon_n \\
&\stackrel{(ii)}{=} I(W_2; \tilde{X}_2^n | \tilde{X}_A^n) + n\epsilon_n \\
&\stackrel{(iii)}{\leq} I(X_2^n; \tilde{X}_2^n | \tilde{X}_A^n) + n\epsilon_n \\
&\leq I(X_2^n; \tilde{X}_2^n, Y_1^n | \tilde{X}_A^n) + n\epsilon_n \\
&= I(X_2^n; Y_1^n | \tilde{X}_A^n) + I(X_2^n; \tilde{X}_2^n | \tilde{X}_A^n, Y_1^n) + n\epsilon_n \\
&\stackrel{(iv)}{\leq} I(X_2^n; Y_1^n | \tilde{X}_A^n) + nK_{14} + n\epsilon_n, \tag{26}
\end{aligned}$$

where (i) follows because from P8, the removal of v_2 disconnects d_2 from s_2 , and therefore, the removal of v_2 and A disconnects d_2 from both sources, and we have $W_2 \leftrightarrow (\tilde{X}_2^n, \tilde{X}_A^n) \leftrightarrow Y_{d_2}^n$; (ii) follows since $\tilde{X}_A^n$ is independent of W_2 ; (iii) follows because, given $\tilde{X}_A^n$, we have $W_2 \leftrightarrow X_2^n \leftrightarrow \tilde{X}_2^n$; (iv) follows by applying Lemma 1 to $I(X_2^n; \tilde{X}_2^n | \tilde{X}_A^n, Y_1^n)$, because $\mathcal{I}(v_1) \setminus \{v_2\} \subset A$, or else we would contradict P1. Furthermore, we have

$$\begin{aligned}
nR_1 &\leq I(W_1; Y_{d_1}^n) + n\epsilon_n \\
&\stackrel{(i)}{\leq} I(W_1; \tilde{X}_3^n, Y_1^n) + n\epsilon_n \\
&= I(W_1; \tilde{X}_3^n) + I(W_1; Y_1^n | \tilde{X}_3^n) + n\epsilon_n \\
&\stackrel{(ii)}{\leq} I(W_1; \tilde{X}_3^n | \tilde{X}_B^n) + I(W_1; Y_1^n | \tilde{X}_3^n) + n\epsilon_n \\
&\stackrel{(iii)}{\leq} I(X_3^n; \tilde{X}_3^n | \tilde{X}_B^n) + I(W_1; Y_1^n | \tilde{X}_3^n) + n\epsilon_n \\
&\stackrel{(iv)}{\leq} I(X_3^n; \tilde{X}_3^n | \tilde{X}_B^n) + I(\tilde{X}_A^n; Y_1^n | \tilde{X}_3^n) + n\epsilon_n \\
&= I(X_3^n; \tilde{X}_3^n | \tilde{X}_B^n) + I(\tilde{X}_A^n, X_2^n; Y_1^n | \tilde{X}_3^n) \\
&\quad - I(X_2^n; Y_1^n | \tilde{X}_3^n, \tilde{X}_A^n) + n\epsilon_n \\
&\leq I(X_3^n; \tilde{X}_3^n | \tilde{X}_B^n) + I(\tilde{X}_A^n, X_2^n, \tilde{X}_3^n; Y_1^n) \\
&\quad - I(X_2^n; Y_1^n | \tilde{X}_3^n, \tilde{X}_A^n) + n\epsilon_n \\
&\stackrel{(v)}{=} I(X_3^n; \tilde{X}_3^n | \tilde{X}_B^n) + I(\tilde{X}_A^n, X_2^n; Y_1^n) \\
&\quad - I(X_2^n; Y_1^n | \tilde{X}_A^n) + n\epsilon_n \\
&\stackrel{(vi)}{\leq} I(X_3^n; \tilde{X}_3^n | \tilde{X}_B^n) + \frac{n}{2} \log P + nK_{15} \\
&\quad - I(X_2^n; Y_1^n | \tilde{X}_A^n) + n\epsilon_n \\
&\leq I(X_3^n; Y_4^n | \tilde{X}_B^n) + I(X_3^n; \tilde{X}_3^n | \tilde{X}_B^n, Y_4^n) \\
&\quad + \frac{n}{2} \log P + nK_{15} - I(X_2^n; Y_1^n | \tilde{X}_A^n) + n\epsilon_n \\
&\stackrel{(vii)}{\leq} I(X_3^n; Y_4^n | \tilde{X}_B^n) + \frac{n}{2} \log P + n(K_{15} + K_{16}) \\
&\quad - I(X_2^n; Y_1^n | \tilde{X}_A^n) + n\epsilon_n, \tag{27}
\end{aligned}$$

where (i) follows from P9, which implies $W_1 \leftrightarrow (\tilde{X}_3^n, Y_1^n) \leftrightarrow Y_{d_1}^n$; (ii) follows from the fact that $\tilde{X}_B^n$ is independent of W_1 ; (iii) follows from the fact that, given $\tilde{X}_B^n$, we have $W_1 \leftrightarrow X_3^n \leftrightarrow \tilde{X}_3^n$; (iv) follows from the fact that $s_1 \in A$; (v) follows because P1 and P10 imply that $s_2 \not\leftrightarrow v_3$ and, therefore, $v_3 \in A$; (vi) follows from the fact that $I(\tilde{X}_A^n, X_2^n; Y_1^n)$ can be upper bounded by $h(Y_1^n) - h(N_{2,1}^n)$ by following the steps in (6), where K_{15} is a constant, independent of P , for

P sufficiently large; and (vii) follows by applying Lemma 1 to $I(X_3^n; \tilde{X}_3^n | \tilde{X}_B^n, Y_4^n)$, since $\mathcal{I}(v_4) \setminus \{v_3\} \subset B$, or else we contradict P4. In order to bound the sum degrees-of-freedom, we can use the fact that

$$\begin{aligned}
nR_1 &\leq I(W_1; Y_{d_1}^n) + n\epsilon_n = h(Y_{d_1}^n) - h(Y_{d_1}^n | W_1) + n\epsilon \\
&\leq h(Y_{d_1}^n) - h(Y_{d_1}^n | W_1, X_{\mathcal{I}(d_1)}^n) + n\epsilon \\
&= h(Y_{d_1}^n) - h(N_{d_1}^n) + n\epsilon \leq \frac{n}{2} \log P + nK_{17} + n\epsilon, \tag{28}
\end{aligned}$$

where the last inequality follows in the same way as (6). Therefore, we can add inequalities (25), (26), (27) and (28) in order to obtain

$$\begin{aligned}
2n(R_1 + R_2) &\leq \frac{3n}{2} \log P + n \sum_{j=13}^{17} K_j + n\epsilon_n \\
\Rightarrow \frac{R_1 + R_2}{\frac{1}{2} \log P} &\leq \frac{3}{2} + \frac{\sum_{j=13}^{17} K_j + \epsilon_n}{\log P}.
\end{aligned}$$

Thus, if we let $n \rightarrow \infty$ and then $P \rightarrow \infty$, we obtain $D_\Sigma \leq \frac{3}{2}$.

VII. OBTAINING THE FULL DEGREES-OF-FREEDOM REGION

In this section, we extend the results from Theorem 1 and characterize the full degrees-of-freedom region of two-unicast layered Gaussian networks. The degrees-of-freedom region (see Definition 9) can be understood as a high-SNR approximation to the capacity region, scaled down by $\frac{1}{2} \log P$. Since the sum degrees-of-freedom is given by

$$D_\Sigma = \lim_{P \rightarrow \infty} \left(\sup_{(R_1, R_2) \in \mathcal{C}(P)} \frac{R_1 + R_2}{\frac{1}{2} \log P} \right),$$

we conclude that if $(D_1, D_2) \in \mathcal{D}$, then we must have $D_1 + D_2 \leq D_\Sigma$. Thus, the results from Theorem 1 provide an outer bound to the degrees-of-freedom region with at least one achievable point. Moreover, by following the steps in (28), it is always possible to bound each individual rate, for P sufficiently large, as

$$R_i \leq \frac{1}{2} \log P + K,$$

where K is independent of P , for $i = 1, 2$. Hence, we conclude that $\mathcal{D}$ is always a subset of $\{(D_1, D_2) \in \mathbb{R}_+^2 : D_1 \leq 1, D_2 \leq 1\}$. It is straightforward to show that $\mathcal{D}$ is convex. Therefore, for networks that belong to cases (A) and (A') from Theorem 1, the fact that $D_\Sigma = 1$ guarantees that the degrees-of-freedom region is given by

$$\mathcal{D} = \{(D_1, D_2) \in \mathbb{R}_+^2 : D_1 + D_2 \leq 1\}.$$

This region is depicted in Figure 2(a). The degrees-of-freedom region for networks in cases (B) and (B') can also be easily obtained from the result in Theorem 1. Since for all networks in cases (B) and (B'), we have $(1, 1) \in \mathcal{D}$, we conclude that the degrees-of-freedom region in these cases is given by

$$\mathcal{D} = \{(D_1, D_2) \in \mathbb{R}_+^2 : D_1 \leq 1, D_2 \leq 1\},$$

as depicted in Figure 2(b).

For networks in case (C), we will once again consider the division into cases C1 and C2, as described in Section VI. If our network $\mathcal{N}$ falls into case C2, then, under the assumption that properties P2, P3, P5 and P6 in Section VI-C are satisfied for $i = 1$, we have inequalities (25), (26) and (27). By adding these three inequalities, we obtain

$$\begin{aligned} n(R_1 + 2R_2) &\leq n \log P + n \sum_{j=13}^{16} K_j + n\epsilon_n \\ \Rightarrow \frac{R_1 + 2R_2}{\frac{1}{2} \log P} &\leq 2 + \frac{\sum_{j=13}^{16} K_j + \epsilon_n}{\frac{1}{2} \log P} \\ \Rightarrow \lim_{P \rightarrow \infty} \left(\sup_{(R_1, R_2) \in \mathcal{C}(P)} \frac{R_1 + 2R_2}{\frac{1}{2} \log P} \right) &\leq 2, \end{aligned}$$

which implies that, if $(D_1, D_2) \in \mathcal{D}$, then $D_1 + 2D_2 \leq 2$. Since the achievability scheme described in Section VI-C shows that $(1, 1/2) \in \mathcal{D}$, we conclude that the degrees-of-freedom region for networks which belong to case C2 (but do not belong to cases (A), (A'), (B), (B') and C1) and satisfy properties P2, P3, P5 and P6 in Section VI-C for $i = 1$ is given by

$$\mathcal{D} = \{(D_1, D_2) \in \mathbb{R}_+^2 : D_1 \leq 1, D_1 + 2D_2 \leq 2\}. \quad (29)$$

This region is depicted in Figure 2(d). If properties P2, P3, P5 and P6 in Section VI-C are instead satisfied for $i = 2$, then it is easy to see that analogous results will hold, and the degrees-of-freedom region is given by

$$\mathcal{D} = \{(D_1, D_2) \in \mathbb{R}_+^2 : D_1 \leq 1, 2D_1 + D_2 \leq 2\}, \quad (30)$$

as depicted in Figure 2(e). The only networks that we still need to consider are networks which are in case C1. We will show that in these cases the degrees-of-freedom region will be given by

$$\mathcal{D} = \{(D_1, D_2) \in \mathbb{R}_+^2 : D_1 \leq 1, D_2 \leq 1, D_1 + D_2 \leq 3/2\}, \quad (31)$$

as shown in Figure 2(c). In order to do that we will assume that our network $\mathcal{N}$ contains disjoint paths P_{s_1, d_1} and P_{s_2, d_2} such that $n_1(G) \geq 2$, $n_1^D = 1$, $n_2(G) = 1$ and $n_2^D = 0$, and that the nodes from $\mathcal{N}$ are named as described in Section VI-A and depicted in Figure 27(a). We will then consider the condensed network formed by layers V_1 , $V_{\ell(v_2)}$ and V_r , which is shown in Figure 27(b). Notice that u_2 is the same node as v_2 in the original network. Therefore, edges $\hat{h}(s_1, u_3)$ and $\hat{h}(u_1, d_2)$ may not exist due to property P1 in Section VI-B. Edges $\hat{h}(s_2, u_1)$ and $\hat{h}(u_3, d_1)$ may or may not exist, and that will depend on the position of the edge (v_3, v_4) in the original network. We will show that points $(1, 1/2)$ and $(1/2, 1)$ are included in $\mathcal{D}$ and, by convexity and the fact that $D_\Sigma \leq 3/2$, $\mathcal{D}$ must be as shown in Figure 2(c).

First note that we may assume that exactly one of the edges $\hat{h}(s_2, u_1)$ and $\hat{h}(u_3, d_1)$ exists. Otherwise, by removing u_2 , P_{s_1, d_1} and P_{s_2, d_2} have manageable interference, thus $(1, 1)$ is in $\mathcal{D}$ and we are in case (B). Hence, we restrict ourselves to two cases: (1) $\hat{h}(u_3, d_1) \neq 0$; and (2) $\hat{h}(s_2, u_1) \neq 0$. We consider each one separately.

1) $\hat{h}(u_3, d_1) \neq 0$: This network is depicted in Figure 28(a). We see that it falls in the case described in Section VI-A2. The achievability scheme provided for $D_\Sigma = 3/2$ shows that $(1/2, 1) \in \mathcal{D}$. In order to achieve the point $(1, 1/2)$, we need to use a scheme based on real interference alignment, similar to the ones described in [22] and [30].

At source s_1 , the message W_1 will be split into two submessages $W_1^{(1)}$ and $W_1^{(2)}$, while s_2 will have a single message W_2 . Each of these messages will be encoded using a single codebook with codewords of length n , which is obtained by uniform i.i.d. sampling of the set

$$\mathcal{U} = \mathbb{Z} \cap \left[-\gamma P^{\frac{1-\epsilon}{2(2+\epsilon)}}, \gamma P^{\frac{1-\epsilon}{2(2+\epsilon)}} \right], \quad (32)$$

for a small $\epsilon > 0$ and a constant γ . The rate of this code, i.e., the number of codewords, will be determined later. We will let $a_j[1], a_j[2], \dots, a_j[n]$ be the n symbols of the codeword associated to message $W_1^{(j)}$, $j = 1, 2$, and $b[1], b[2], \dots, b[n]$ be the n symbols of the codeword associated to message W_2 . At time $t \in \{1, \dots, n\}$, source s_1 will transmit

$$X_{s_1}[t] = G(a_1[t] + T a_2[t]),$$

where T is an irrational number, and $G = \beta P^{\frac{1+2\epsilon}{2(2+\epsilon)}}$ is chosen to satisfy the power constraint for a constant β to be determined. Source s_2 will transmit

$$X_{s_2}[t] = G \frac{\hat{h}(s_1, u_2)}{\hat{h}(s_2, u_2)} b[t].$$

The maximum power of a transmit signal from s_1 is upper-bounded by

$$\beta^2 P^{\frac{1+2\epsilon}{2+\epsilon}} (1 + T^2) \gamma^2 P^{\frac{1-\epsilon}{2+\epsilon}} = \beta^2 (1 + T^2) \gamma^2 P,$$

and the maximum power of a transmit signal from s_2 is upper-bounded by

$$\beta^2 P^{\frac{1+2\epsilon}{2+\epsilon}} \frac{\hat{h}(s_1, u_2)^2}{\hat{h}(s_2, u_2)^2} \gamma^2 P^{\frac{1-\epsilon}{2+\epsilon}} = \beta^2 \frac{\hat{h}(s_1, u_2)^2}{\hat{h}(s_2, u_2)^2} \gamma^2 P.$$

Thus, for any choice of T and γ , parameter β can be chosen so that the maximum transmit power at the sources is less than P . Next we write the received signals at u_1 , u_2 and u_3 . We will drop the time t from the notation for simplicity.

$$Y_{u_1} = G \hat{h}(s_1, u_1) (a_1 + T a_2) + N_{u_1}$$

$$Y_{u_2} = G \hat{h}(s_1, u_2) (a_1 + b + T a_2) + N_{u_2}$$

$$Y_{u_3} = \frac{G \hat{h}(s_2, u_3) \hat{h}(s_1, u_2)}{\hat{h}(s_2, u_2)} b + N_{u_3}$$

Nodes u_1 and u_3 will simply perform amplify-and-forward. More precisely, their transmit signals will be given by

$$X_{u_1} = \alpha Y_{u_1} = \alpha G \hat{h}(s_1, u_1) (a_1 + T a_2) + \alpha N_{u_1},$$

$$\begin{aligned} X_{u_3} &= -\alpha \frac{\hat{h}(s_2, u_2)}{\hat{h}(s_2, u_3) \hat{h}(s_1, u_2)} \frac{\hat{h}(s_1, u_1) \hat{h}(u_1, d_1)}{\hat{h}(u_3, d_1)} Y_{u_3} \\ &= -\alpha G \frac{\hat{h}(s_1, u_1) \hat{h}(u_1, d_1)}{\hat{h}(u_3, d_1)} b + \alpha K_1 N_{u_3}, \end{aligned}$$

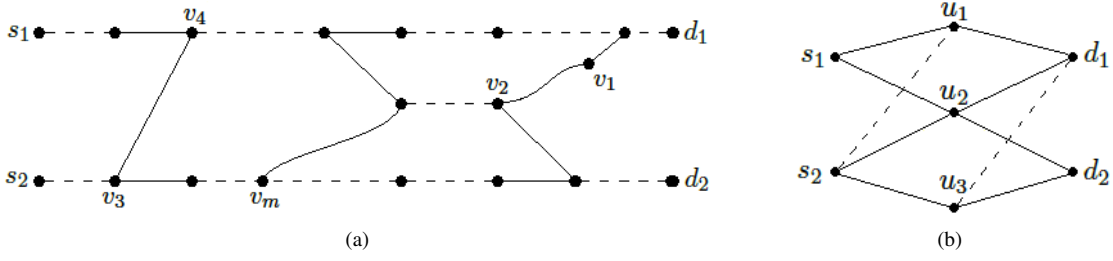


Fig. 27. (a) Illustration of network from case C1, up to a change in the position of edge (v_3, v_4) ; (b) Condensed network for networks in case C1.

where α is a constant and K_1 is a function of the channel gains. We will choose α so that the power constraint at each relay is satisfied. For example, consider node u_1 . The noise term at its received signal, N_{u_1} , is a linear combination of noises in the original networks, whose coefficients are products of channel gains. Therefore, we may assume that $E[N_{u_1}^2]$ is a constant $\sigma_{u_1}^2$. Thus, the transmitted power at u_1 is

$$\begin{aligned} E[\alpha^2 Y_{u_1}^2] &= \alpha^2 \beta^2 P^{\frac{1+2\epsilon}{2+\epsilon}} \hat{h}^2(s_1, u_1) (1 + T^2) \gamma^2 P^{\frac{1-\epsilon}{2+\epsilon}} + \alpha^2 \sigma_{u_1}^2 \\ &= \alpha^2 \beta^2 \hat{h}^2(s_1, u_1) (1 + T^2) \gamma^2 P + \alpha^2 \sigma_{u_1}^2. \end{aligned} \quad (33)$$

It is now easy to see that α can be chosen independently of P to make sure that $E[\alpha^2 Y_{u_1}^2] \leq P$, for P sufficiently large. The received signal at node u_2 can be seen as a noisy observation of a point in the set

$$\mathcal{U}_{u_2} = G\hat{h}(s_1, u_2) \{x_1 + Tx_2 : x_1 \in \mathcal{U} + \mathcal{U}, x_2 \in \mathcal{U}\},$$

for $x_1 = a_1 + b$ and $x_2 = a_2$, where $\mathcal{U} + \mathcal{U} = \{u_1 + u_2 : u_1, u_2 \in \mathcal{U}\} \subset \mathbb{Z} \cap \left[-2\gamma P^{\frac{1-\epsilon}{2(2+\epsilon)}}, 2\gamma P^{\frac{1-\epsilon}{2(2+\epsilon)}}\right]$. As explained in [22], the fact that T is irrational guarantees that there is a one-to-one map from the points in $\mathcal{U}_{u_2}$ to the points $(x_1, x_2) \in (\mathcal{U} + \mathcal{U}) \times \mathcal{U}$. Moreover, from Theorem 1 of [22] and subsequent remarks, we conclude that, for almost all choices of T , the minimum distance between two points in $\mathcal{U}_{u_2}$ satisfies

$$d_{\min} > G\hat{h}(s_1, u_2) \frac{\kappa}{(\max_{x \in \mathcal{U}} x)^{1+\epsilon}},$$

for some constant κ . Thus we have

$$d_{\min} > \hat{h}(s_1, u_2) \frac{\kappa \beta P^{\frac{1+2\epsilon}{2(2+\epsilon)}}}{\gamma^{1+\epsilon} P^{\frac{(1-\epsilon)(1+\epsilon)}{2(2+\epsilon)}}} = \frac{\hat{h}(s_1, u_2) \kappa \beta}{\gamma^{1+\epsilon}} P^{\epsilon/2}.$$

Node u_2 will map its received signal to the nearest point in $\mathcal{U}_{u_2}$, and then use the fact that this point uniquely determines $(a_1 + b)$ and a_2 to decode these two integers. We will refer to the output of this procedure as $\hat{a}_1 + \hat{b}$ and $\hat{a}_2$. If the variance of N_{u_2} is given by $\sigma_{u_2}^2$, then the probability of a wrong decoding at u_2 is given by

$$\begin{aligned} \Pr[\hat{a}_1 + \hat{b} \neq a_1 + b, \hat{a}_2 \neq a_2] &\leq 2Q\left(\frac{d_{\min}}{2\sigma_{u_2}}\right) \\ &< \exp\left(-\frac{d_{\min}^2}{8\sigma_{u_2}^2}\right) = \exp(-\delta P^\epsilon), \end{aligned}$$

where δ is a positive constant, independent of P . The transmit signal at u_2 will then be

$$X_{u_2} = \alpha G \frac{\hat{h}(s_1, u_1) \hat{h}(u_1, d_1)}{\hat{h}(u_2, d_1)} (\hat{a}_1 + \hat{b}).$$

We choose α independently of P , so that the power constraints at u_1 , u_2 and u_3 are simultaneously satisfied, for P sufficiently large. The received signal at the destination d_1 is given by

$$\begin{aligned} Y_{d_1} &= \hat{h}(u_1, d_1) X_{u_1} + \hat{h}(u_2, d_1) X_{u_2} \\ &\quad + \hat{h}(u_3, d_1) X_{u_3} + N_{d_1} \\ &= \alpha G \hat{h}(s_1, u_1) \hat{h}(u_1, d_1) (a_1 + Ta_2 + \hat{a}_1 + \hat{b} - b) \\ &\quad + N_{d_1}^{\text{eff}}, \end{aligned}$$

where $N_{d_1}^{\text{eff}} = \alpha \hat{h}(u_1, d_1) N_{u_1} + \alpha \hat{h}(u_2, d_1) K_1 N_{u_3} + N_{d_1}$. The received signal at d_2 is given by

$$\begin{aligned} Y_{d_2} &= \hat{h}(u_2, d_2) X_{u_2} + \hat{h}(u_3, d_2) X_{u_3} + N_{d_2} \\ &= \alpha G \frac{\hat{h}(u_2, d_2) \hat{h}(s_1, u_1) \hat{h}(u_1, d_1)}{\hat{h}(u_2, d_1)} (\hat{a}_1 + \hat{b}) \\ &\quad - \alpha \frac{\hat{h}(u_3, d_2) \hat{h}(s_1, u_1) \hat{h}(u_1, d_1)}{\hat{h}(u_3, d_1)} b + N_{d_2}^{\text{eff}}, \end{aligned}$$

where $N_{d_2}^{\text{eff}} = \alpha \hat{h}(u_3, d_2) K_1 N_{u_3} + N_{d_2}$. Notice that with probability at least $1 - \exp(-\delta P^\epsilon)$, Y_{d_1} and Y_{d_2} are given by

$$\begin{aligned} Y_{d_1} &= \alpha G \hat{h}(s_1, u_1) \hat{h}(u_1, d_1) (2a_1 + Ta_2) + N_{d_1}^{\text{eff}}, \\ Y_{d_2} &= \alpha G \hat{h}(s_1, u_1) \hat{h}(u_1, d_1) \\ &\quad \left(\frac{\hat{h}(u_2, d_2)}{\hat{h}(u_2, d_1)} (a_1 + b) - \frac{\hat{h}(u_3, d_2)}{\hat{h}(u_3, d_1)} b \right) + N_{d_2}^{\text{eff}}. \end{aligned}$$

The destinations will first perform a hard-decoding, similar to the one performed by u_2 . If we assume that the decoding at node u_2 was correct, the signal received by d_1 is a noisy version of a point in the set

$$\mathcal{U}_{d_1} = \alpha G \hat{h}(s_1, u_1) \hat{h}(u_1, d_1) \{2x_1 + Tx_2 : x_1, x_2 \in \mathcal{U}\},$$

for $x_1 = a_1$ and $x_2 = a_2$. Thus, by using the same argument used previously, it can be shown that d_1 can decode a_1 and a_2 with probability of error smaller than $\exp(-\delta_2 P^\epsilon)$, for some positive constant δ_2 . Assuming that the decoding at node u_2 was correct, the signal received by d_2 is a noisy version of a point in the set

$$\begin{aligned} \mathcal{U}_{d_2} &= \alpha G \hat{h}(s_1, u_1) \hat{h}(u_1, d_1) \frac{\hat{h}(u_2, d_2)}{\hat{h}(u_2, d_1)} \\ &\quad \{x_1 + T_2 x_2 : x_1 \in \mathcal{U} + \mathcal{U}, x_2 \in \mathcal{U}\}, \end{aligned}$$

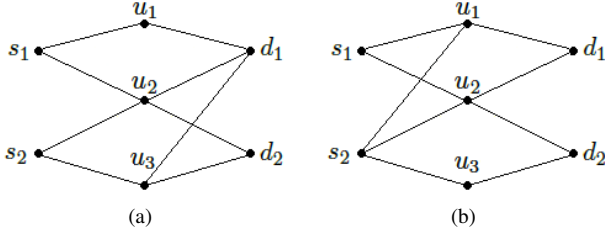


Fig. 28. (a) Condensed network in case (1); (b) Condensed network in case (2).

for $x_1 = a_1 + b$ and $x_2 = b$, where $T_2 = -\frac{\hat{h}(u_2, d_1)\hat{h}(u_3, d_2)}{\hat{h}(u_2, d_2)\hat{h}(u_3, d_1)}$. Next we notice that $\hat{h}(u_2, d_1)$, $\hat{h}(u_3, d_2)$, $\hat{h}(u_2, d_2)$ and $\hat{h}(u_3, d_1)$ are each a polynomial on the channel gains h_e of the original network with only coefficients 1. Since each h_e is independently drawn from a continuous distribution, we see that if the polynomials $\hat{h}(u_2, d_1)\hat{h}(u_3, d_2)$ and $\hat{h}(u_2, d_2)\hat{h}(u_3, d_1)$ are not identical, then, with probability 1, T_2 is an irrational number. From the description of the original network, given in Section VI-A, we see that $u_2 = v_2$ is on a path P_{v_m, v_1} such that $P_{v_m, v_1} \cap P_{s_2, d_2} = \{v_m\}$, $v_m \neq v_2$ and $v_1 \xrightarrow{I} P_{s_1, d_1}$. Therefore, there must exist two disjoint paths P_{u_2, d_1} and P_{u_3, d_2} . This implies that the determinant

$$\begin{vmatrix} \hat{h}(u_2, d_1) & \hat{h}(u_3, d_1) \\ \hat{h}(u_2, d_2) & \hat{h}(u_3, d_2) \end{vmatrix} \\ = \hat{h}(u_2, d_1)\hat{h}(u_3, d_2) - \hat{h}(u_3, d_1)\hat{h}(u_2, d_2)$$

is non-zero with probability 1. This implies that $\hat{h}(u_2, d_1)\hat{h}(u_3, d_2)$ and $\hat{h}(u_3, d_1)\hat{h}(u_2, d_2)$ are not identical polynomials. Hence, we conclude that, with probability 1, T_2 is an irrational number and d_2 can decode b (and also $a_1 + b$, and thus a_1 , even though d_2 does not require the message encoded by the a_1 's) with probability at least $1 - \exp(-\delta_3 P^\epsilon)$, for some $\delta_3 > 0$.

By applying these hard-decoders, destination d_1 obtains the estimates $\hat{a}_1[t]$ and $\hat{a}_2[t]$, and destination d_2 obtains the estimates $\hat{b}[t]$, for $t = 1, \dots, n$. Then they can apply typicality-based decoders in order to decode the messages $W_1^{(1)}$, $W_1^{(2)}$ and W_2 .

We now determine the rate of the codebook which is used to encode $W_1^{(1)}$, $W_1^{(2)}$ and W_2 . We notice that for each of the messages $W_1^{(1)}$, $W_1^{(2)}$ and W_2 , we effectively have a point-to-point discrete channel with input and output alphabet $\mathcal{U}$. Even though we do not calculate the actual transition probabilities, we know that the error probability is upper-bounded as

$$\begin{aligned} P_e &\leq 1 - (1 - \exp(-\delta P^\epsilon)) \\ &\quad (1 - \exp(-\delta_2 P^\epsilon))(1 - \exp(-\delta_3 P^\epsilon)) \\ &\leq 1 - (1 - \exp(-\delta_{\min} P^\epsilon))^3 \leq 4 \exp(-\delta_{\min} P^\epsilon), \end{aligned}$$

where $\delta_{\min} = \min(\delta, \delta_2, \delta_3)$. This allows us to lower bound the mutual information between the input U and the output $\hat{U}$ of this channel, for a uniform distribution over the input

alphabet. Using Fano's inequality, we have

$$\begin{aligned} I(U; \hat{U}) &\geq H(U) - H(U|\hat{U}) \\ &\geq \log |\mathcal{U}| - (1 + P_e \log |\mathcal{U}|) \\ &= (1 - P_e) \log |\mathcal{U}| - 1 \\ &\geq (1 - 4 \exp(-\delta_{\min} P^\epsilon)) \left(\frac{1 - \epsilon \log P}{2 + \epsilon} + 1 \right) - 1 \\ &\geq (1 - 4 \exp(-\delta_{\min} P^\epsilon)) \frac{1 - \epsilon \log P}{2 + \epsilon} - 4. \end{aligned}$$

Therefore, since we constructed our code by taking independent samples uniformly at random from the set $\mathcal{U}$, it can achieve rate $R = (1 - 4 \exp(-\delta_{\min} P^\epsilon)) \frac{1 - \epsilon \log P}{2 + \epsilon} - 4$, by having the codebook contain 2^{nR} codewords. Thus, each of the messages $W_1^{(1)}$, $W_1^{(2)}$ and W_2 possesses

$$\lim_{P \rightarrow \infty} \frac{R}{\frac{1}{2} \log P} = \frac{1 - \epsilon}{2 + \epsilon}$$

degrees-of-freedom. Since ϵ can be chosen arbitrarily small, we conclude that each of the messages may in fact achieve arbitrarily close to $1/2$ degrees-of-freedom. Therefore, we achieve the point $(1, 1/2)$ in the degrees-of-freedom region, and complete the proof in this case.

2) $\hat{h}(s_2, u_1) \neq 0$: As seen in Figure 28(b), the network in this case falls in the category of networks described in Section VI-A1. The achievability scheme provided for $D_\Sigma = 3/2$ shows that $(1, 1/2) \in \mathcal{D}$. Once more, we will use real interference alignment to achieve the other extreme point, i.e., $(1/2, 1)$. We will follow the steps in case (1) closely.

This time, at source s_2 , message W_2 will be split into two submessages $W_2^{(1)}$ and $W_2^{(2)}$, while s_1 will have a single message W_1 . These three messages will be encoded using a single codebook with codewords of length n , which are obtained by uniform i.i.d. sampling of the set $\mathcal{U}$, defined in (32). The rate of this code will be determined later. We let $a[1], a[2], \dots, a[n]$ be the n symbols of the codeword associated to message W_1 , and $b_j[1], b_j[2], \dots, b_j[n]$ be the n symbols of the codeword associated to message $W_2^{(j)}$, $j = 1, 2$. Sources s_1 and s_2 will respectively transmit

$$\begin{aligned} X_{s_1}[t] &= Ga[t], \\ X_{s_2}[t] &= G \left(\frac{\hat{h}(s_1, u_1)}{\hat{h}(s_2, u_1)} b_1[t] + \frac{\hat{h}(s_1, u_2)}{\hat{h}(s_2, u_2)} b_2[t] \right). \end{aligned}$$

As in (1), G can be chosen as $G = \beta P^{\frac{1+2\epsilon}{2(2+\epsilon)}}$ to satisfy the sources power constraint, for some constant β . We again drop t from the notation for simplicity. The received signals at u_1 , u_2 and u_3 are given by

$$\begin{aligned} Y_{u_1} &= G \hat{h}(s_1, u_1) \left(a + b_1 + \frac{\hat{h}(s_1, u_2)\hat{h}(s_2, u_1)}{\hat{h}(s_2, u_2)\hat{h}(s_1, u_1)} b_2 \right) + N_{u_1}, \\ Y_{u_2} &= G \hat{h}(s_1, u_2) \left(\frac{\hat{h}(s_2, u_2)\hat{h}(s_1, u_1)}{\hat{h}(s_1, u_2)\hat{h}(s_2, u_1)} b_1 + b_2 + a \right) + N_{u_2}, \\ Y_{u_3} &= G \hat{h}(s_2, u_3) \left(\frac{\hat{h}(s_1, u_1)}{\hat{h}(s_2, u_1)} b_1 + \frac{\hat{h}(s_1, u_2)}{\hat{h}(s_2, u_2)} b_2 \right) + N_{u_3}. \end{aligned}$$

Nodes u_1 and u_3 will simply perform amplify-and-forward. More precisely, their transmit signals will be given by

$$\begin{aligned} X_{u_1} &= \frac{\alpha \hat{h}(u_2, d_1)}{\hat{h}(s_1, u_1) \hat{h}(u_1, d_1)} Y_{u_1} \\ &= \frac{\alpha G \hat{h}(u_2, d_1)}{\hat{h}(u_1, d_1)} \left(a + b_1 + \frac{\hat{h}(s_1, u_2) \hat{h}(s_2, u_1)}{\hat{h}(s_2, u_2) \hat{h}(s_1, u_1)} b_2 \right) + \alpha K_1 N_{u_1}, \end{aligned}$$

$$\begin{aligned} X_{u_3} &= \frac{-\alpha \hat{h}(s_2, u_1) \hat{h}(u_2, d_2)}{\hat{h}(s_1, u_1) \hat{h}(s_2, u_3) \hat{h}(u_3, d_2)} Y_{u_3} \\ &= \frac{\alpha G \hat{h}(u_2, d_2)}{\hat{h}(u_3, d_2)} \left(-b_1 - \frac{\hat{h}(s_1, u_2) \hat{h}(s_2, u_1)}{\hat{h}(s_2, u_2) \hat{h}(s_1, u_1)} b_2 \right) + \alpha K_2 N_{u_3}, \end{aligned}$$

for some constant α , where K_1 and K_2 are functions of the channel gains only. The received signal at node u_2 can be seen as a noisy observation of a point in the set

$$\mathcal{U}_{u_2} = G \hat{h}(s_1, u_2) \{T x_1 + x_2 : x_1 \in \mathcal{U}, x_2 \in \mathcal{U} + \mathcal{U}\},$$

for $x_1 = b_1$ and $x_2 = a + b_2$, where $T = \frac{\hat{h}(s_2, u_2) \hat{h}(s_1, u_1)}{\hat{h}(s_1, u_2) \hat{h}(s_2, u_1)}$. Next we notice that $\hat{h}(u_2, d_1)$, $\hat{h}(u_3, d_2)$, $\hat{h}(u_2, d_2)$ and $\hat{h}(u_3, d_1)$ are each a polynomial on the channel gains $\hat{h}_e$ of the original network with only coefficients 1. From the description of the original network from Section VI-A, we see that $u_2 = v_2$ is on a path P_{v_m, v_1} such that $P_{v_m, v_1} \cap P_{s_1, d_1} = \emptyset$ and $v_m \in P_{s_2, d_2}$. Therefore, there must exist two disjoint paths P_{s_1, u_1} and P_{s_2, u_2} . This implies that the determinant

$$\begin{vmatrix} \hat{h}(s_1, u_1) & \hat{h}(s_2, u_1) \\ \hat{h}(s_1, u_2) & \hat{h}(s_2, u_2) \end{vmatrix} \\ = \hat{h}(s_2, u_2) \hat{h}(s_1, u_1) - \hat{h}(s_1, u_2) \hat{h}(s_2, u_1)$$

is non-zero with probability 1. As we argued before, this implies that, with probability 1 on the value of T , after mapping the received signal to the nearest point in $\mathcal{U}_{u_2}$, u_2 can decode b_1 and $a + b_2$ with probability at least $1 - \exp(-\delta_4 P^\epsilon)$, for some positive constant δ_4 . The transmit signal at u_2 , will then be

$$X_{u_2} = -\alpha G \hat{b}_1,$$

where $\hat{b}_1$ is the output of the hard-decoding performed by u_2 . We again notice that α can be chosen independently of P , for P sufficiently large, guaranteeing that the power constraints at u_1 , u_2 and u_3 are simultaneously satisfied. The received signal at destination d_1 is given by

$$\begin{aligned} Y_{d_1} &= \hat{h}(u_1, d_1) X_{u_1} + \hat{h}(u_2, d_1) X_{u_2} + N_{d_1} \\ &= \alpha G \hat{h}(u_2, d_1) \left(a + b_1 - \hat{b}_1 + \frac{\hat{h}(s_1, u_2) \hat{h}(s_2, u_1)}{\hat{h}(s_2, u_2) \hat{h}(s_1, u_1)} b_2 \right) + N_{d_1}^{\text{eff}}, \end{aligned}$$

where $N_{d_1}^{\text{eff}} = \alpha \hat{h}(u_1, d_1) K_1 N_{u_1} + N_{d_1}$. The received signal at d_2 is given by

$$\begin{aligned} Y_{d_2} &= \hat{h}(u_2, d_2) X_{u_2} + \hat{h}(u_3, d_2) X_{u_3} + N_{d_2} \\ &= \alpha G \hat{h}(u_2, d_2) \left(-b_1 - \hat{b}_1 - \frac{\hat{h}(s_1, u_2) \hat{h}(s_2, u_1)}{\hat{h}(s_2, u_2) \hat{h}(s_1, u_1)} b_2 \right) + N_{d_2}^{\text{eff}}, \end{aligned}$$

where $N_{d_2}^{\text{eff}} = \alpha \hat{h}(u_3, d_2) K_2 N_{u_3} + N_{d_2}$. Notice that with probability at least $1 - \exp(-\delta_4 P^\epsilon)$, Y_{d_1} and Y_{d_2} are given by

$$\begin{aligned} Y_{d_1} &= \alpha G \hat{h}(u_2, d_1) \left(a + \frac{\hat{h}(s_1, u_2) \hat{h}(s_2, u_1)}{\hat{h}(s_2, u_2) \hat{h}(s_1, u_1)} b_2 \right) + N_{d_1}^{\text{eff}}, \\ Y_{d_2} &= \alpha G \hat{h}(u_2, d_2) \left(-2b_1 - \frac{\hat{h}(s_1, u_2) \hat{h}(s_2, u_1)}{\hat{h}(s_2, u_2) \hat{h}(s_1, u_1)} b_2 \right) + N_{d_2}^{\text{eff}}. \end{aligned}$$

The destinations will first perform a hard-decoding, similar to the one performed by u_2 . If we assume that the decoding at node u_2 was correct, the signal received by d_1 is a noisy version of a point in the set

$$\mathcal{U}_{d_1} = \alpha G \hat{h}(u_2, d_1) \{x_1 + T^{-1} x_2 : x_1, x_2 \in \mathcal{U}\},$$

for $x_1 = a$ and $x_2 = b_2$. Thus, it can be shown that, with probability 1 over the value of T^{-1} , d_1 can decode a (and also b_2) with probability of error smaller than $\exp(-\delta_5 P^\epsilon)$, for some positive constant δ_5 . Again assuming that the decoding at node u_2 was correct, the signal received by d_2 is a noisy version of a point in the set

$$\mathcal{U}_{d_2} = \alpha G \hat{h}(u_2, d_2) \{x_1 + T x_2 : x_1 \in 2\mathcal{U}, x_2 \in \mathcal{U}\},$$

for $x_1 = -2b_1$ and $x_2 = b_2$. With probability 1 over the value of T , d_2 can decode b_1 and b_2 with probability at least $\exp(-\delta_6 P^\epsilon)$, for some positive constant δ_6 (if the decoding at u_2 was also correct). Therefore, destination d_1 obtains $a[t]$ and destination d_2 obtains both $b_1[t]$ and $b_2[t]$, for $t = 1, \dots, n$, and, by applying typicality-based decoders, the messages W_1 , $W_2^{(1)}$ and $W_2^{(2)}$ can be decoded by their intended destinations. By following the same steps as in case (1), our codebook can have rate

$$R = (1 - 4 \exp(-\delta_{\min} P^\epsilon)) \frac{1 - \epsilon \log P}{2 + \epsilon} \frac{P}{2} - 4,$$

where $\delta_{\min} = \min(\delta_4, \delta_5, \delta_6)$. Thus, each of the messages carries $\frac{1-\epsilon}{2+\epsilon}$ degrees-of-freedom. Since ϵ can be chosen arbitrarily small, we conclude that $(1/2, 1) \in \mathcal{D}$, and $\mathcal{D}$ is as given in (31). This concludes the derivation of the degrees-of-freedom region of all two-unicast layered Gaussian networks.

In order to state the result in a concise way, we will use the notion of disjoint paths with (s_i, d_i) -manageable interference (see Definition 10). Notice that if P_{s_1, d_1} and P_{s_2, d_2} have interference that is both (s_1, d_1) -manageable and (s_2, d_2) -manageable, they do not necessarily have manageable interference, since the latter requires a single set S for which $n_1(G[S]) \neq 1$ and $n_2(G[S]) \neq 1$. We will describe case C1 in terms of (s_i, d_i) -manageable interference through the following claim.

Claim 2. A network $\mathcal{N}$ is in case C1 and not in cases (A), (A'), (B) and (B') if and only if it has disjoint paths P_{s_1, d_1} and P_{s_2, d_2} with interference that is not manageable, but is both (s_1, d_1) -manageable and (s_2, d_2) -manageable.

Proof: By definition, if $\mathcal{N}$ is in case C1, we have WLOG $n_1(G) \geq 2$, $n_1^D = 1$, $n_2(G) = 1$ and $n_2^D = 0$, which implies that P_{s_1, d_1} and P_{s_2, d_2} have (s_1, d_1) -manageable interference. Moreover, we see from Section VI-B (and Figure 27(a)) that

$P_{s_1,d_1} \cup P_{s_2,d_2} \subset V \setminus \{v_2\}$ and, from property P1, we have $n_2(G[V \setminus \{v_2\}]) = 0$, which implies that the interference between P_{s_1,d_1} and P_{s_2,d_2} is also (s_2, d_2) -manageable. Next we argue that, conversely, if P_{s_1,d_1} and P_{s_2,d_2} do not have manageable interference but have interference that is both (s_1, d_1) -manageable and (s_2, d_2) -manageable, then we must be in case C1. Since P_{s_1,d_1} and P_{s_2,d_2} do not have manageable interference, we must have either $n_1^D = 1$ or $n_2^D = 1$. If $n_i^D = 1$, for $i = 1$ or 2 , then since P_{s_1,d_1} and P_{s_2,d_2} have (s_i, d_i) -manageable interference, we must have $n_i(G) \geq 2$. Therefore, we cannot have $n_1^D = n_2^D = 1$, or else we would have $n_1(G) \geq 2$ and $n_2(G) \geq 2$. We conclude that the only possible case is $n_i(G) \geq 2$, $n_i^D = 1$, $n_i(G) = 1$ and $n_i^D = 0$, and we are in case C1. ■

For networks in case C2, we can describe whether properties P2, P3, P5 and P6 in Section VI-C are satisfied for $i = 1$ or $i = 2$ in terms of (s_i, d_i) -manageable interference with the following claim.

Claim 3. *A network $\mathcal{N}$ that is in case C2 and not in cases (A), (A'), (B), (B') and C1 satisfies properties P2, P3, P5 and P6 in Section VI-C for $i = k$ if and only if it contains paths Z_{s_k,d_k} , Q_{s_k,d_k} and P_{s_k,d_k} such that Q_{s_k,d_k} and P_{s_k,d_k} are disjoint and have (s_1, d_1) -manageable interference, Z_{s_k,d_k} and P_{s_k,d_k} are disjoint and have (s_2, d_2) -manageable interference.*

Proof: If $\mathcal{N}$ satisfies properties P2, P3, P5 and P6 in Section VI-C for $i = k$, then it is easy to see that it must contain paths Z_{s_k,d_k} , Q_{s_k,d_k} and P_{s_k,d_k} as in the statement of the claim. Conversely, we want to argue (WLOG) that if we have paths Q_{s_1,d_1} and Z_{s_1,d_1} , each disjoint from P_{s_2,d_2} , such that Z_{s_1,d_1} and P_{s_2,d_2} have (s_2, d_2) -manageable (but not (s_1, d_1) -manageable) interference and Q_{s_1,d_1} and P_{s_2,d_2} have (s_1, d_1) -manageable (but not (s_2, d_2) -manageable) interference, then the network $\mathcal{N}$ must satisfy properties P2, P3, P5 and P6 for $i = 1$. Since Z_{s_1,d_1} and P_{s_2,d_2} have (s_2, d_2) -manageable (but not (s_1, d_1) -manageable) interference, we must have $n_1(G, Z_{s_1,d_1}) = n_1^D(P_{s_2,d_2}, Z_{s_1,d_1}) = 1$. Similarly, we must have $n_2(G, P_{s_2,d_2}) = n_2^D(Q_{s_1,d_1}, P_{s_2,d_2}) = 1$. We let (v_2, v_1) be the unique edge such that $v_2 \in P_{s_2,d_2}$ and $v_1 \in Z_{s_1,d_1}$. Now we notice that we must have $n_1^D(P_{s_2,d_2}, Q_{s_1,d_1}) = 0$, since otherwise we would have a path P_{s_2,d_1} which does not contain $\{v_2, v_1\}$, and this would imply that $n_1(G, Z_{s_1,d_1}) \geq 2$, which contradicts the fact that Z_{s_1,d_1} and P_{s_2,d_2} do not have (s_1, d_1) -manageable interference. Similarly, we must have $n_2^D(Z_{s_1,d_1}, P_{s_2,d_2}) = 0$. ■

The results obtained in this section regarding the complete degrees-of-freedom region are summarized in Theorem 2.

VIII. CONCLUSION

We explored the degrees-of-freedom of two-unicast layered Gaussian networks. Our result shows that, in terms of degrees-of-freedom, there are essentially three categories of such networks. In the first one, the network connectivity creates a bottleneck for the information flow, forcing all the messages to be decodable at a single node. Therefore, we only have one degree-of-freedom. In the second, the interference can be completely avoided or neutralized and we achieve two degrees-of-freedom. Networks which contain a grail or a butterfly

achieve their two degrees-of-freedom by “borrowing” their achievability schemes from linear network coding. When no such structures exist, we must find two disjoint paths and verify whether it is possible to completely neutralize their interference. The notion of manageable interference arises quite naturally in these cases: we simply want to make sure that no path receives a single interference from the other path. This way, a path may either receive no interference at all or receive at least two interferences from the other path, which allows for interference cancellation techniques. The remaining networks have exactly $3/2$ sum degrees-of-freedom. The intuitive reason is that these networks do not have a single node through which all information must pass restricting the degrees-of-freedom to one, but their interference is not manageable. One way to achieve the $3/2$ sum degrees-of-freedom is to perform a sort of “scheduling” of the transmissions, in order to be able to avoid or neutralize the interference. The buffering involved in this scheduling costs us half a degree-of-freedom. This third class of networks can be further subdivided into three subclasses, according to which of the points $(1, 1/2)$ and $(1/2, 1)$ are included in the degrees-of-freedom region.

The achievability schemes considered show that only a small fraction of the nodes must in fact be careful in their relaying operations. In fact, we achieve the sum degrees-of-freedom by converting any multi-layered network into a condensed network with at most four layers. Thus, the nodes in at most four layers (the source layer, the destination layer, and two intermediate layers) perform relaying operations that require channel state information. All the other nodes are simply forwarding their received signals. Another interesting aspect of the achievability schemes is that, in most cases, a linear scheme suffices to achieve two degrees-of-freedom. In some cases, however, we must resort to a more sophisticated scheme such as real interference alignment. For example, this is the case of the $2 \times 2 \times 2$ interference channel studied in [30], where a simple linear scheme cannot achieve two degrees-of-freedom (unless the channel gains vary with time).

Our assumption of a layered network topology serves mainly to simplify the problem. If non-layered networks are considered, the main issue is that interference may occur not only between signals originated at different sources, but also between signals originated at different times. Therefore, in order to perform interference cancellation, for example, one needs to make sure that the two cancelling signals correspond to the same time-version of the source signal. For non-layered networks, other techniques such as signal delaying and backward decoding must be used to achieve the degrees-of-freedom, and the problem becomes significantly more difficult. However, the layered network assumption is not artificial. Since the layered topology simplifies the analysis and the implementation of coding schemes, it is desirable in practice, and it can actually be simulated in practical contexts by having the transmitters on each layer transmit on a different frequency band, which allows us to assume that the links only exist between consecutive layers. Moreover, a layered structure can also arise from the scheduling of the transmitting nodes in a wireless network with half-duplex nodes. In this context, each hop would capture which nodes are transmitting and which

nodes are receiving at a given time slot, and the same node could appear in multiple layers, since they may be transmitting at multiple time-slots.

The natural extension of this work would be to consider more than two information flows in the network. Recently, in [31], networks with two source-destination pairs where each source has a message to each destination (for a total of four messages) were considered. Interestingly, it was shown that the sum degrees-of-freedom can also take values $4/3$ and $5/3$, in addition to the values 1 , $3/2$ and 2 that are possible in the setup considered in this paper. The next step would thus be to consider more than two source-destination pairs. The main issue lies in the combinatorial complexity of a larger number of source-destination pairs. For example, if one were to extend a notion such as manageable interference to more than two source-destination pairs, not only would the number of interferences on a (s_1, d_1) -path have to be considered, but also which subset of the other sources contributes to each interference. Moreover, it is not clear whether the non-linear schemes that were necessary for networks such as the $2 \times 2 \times 2$ interference channel can in fact be easily extended to networks with more than two source-destination pairs. In particular, the characterization of degrees-of-freedom of the $3 \times 3 \times 3$ interference channel remains an open problem.

APPENDIX

A. Proof of Lemma 1

$$\begin{aligned}
& I(X_S^n; \tilde{X}_c^n | Y_b^n, \tilde{X}_A^n, X_T^n) \\
&= I(X_S^n; \{\tilde{X}_{c,j}^n : j \text{ s.t. } v_j \in \mathcal{O}(v_c)\} | Y_b^n, \tilde{X}_A^n, X_T^n) \\
&\stackrel{(i)}{=} I(X_S^n; \{\tilde{X}_{c,j}^n - \frac{h_{c,j}}{h_{c,b}} \tilde{X}_{c,b}^n : j \text{ s.t. } v_j \in \mathcal{O}(v_c)\} | Y_b^n, \tilde{X}_A^n, X_T^n) \\
&\stackrel{(ii)}{=} I(X_S^n; \{N_{c,j}^n - \frac{h_{c,j}}{h_{c,b}} N_{c,b}^n : j \text{ s.t. } v_j \in D\} | Y_b^n, \tilde{X}_A^n, X_T^n) \\
&\leq h(\{N_{c,j}^n - \frac{h_{c,j}}{h_{c,b}} N_{c,b}^n : j \text{ s.t. } v_j \in D\}) \\
&\quad - h(\{N_{c,j}^n - \frac{h_{c,j}}{h_{c,b}} N_{c,b}^n : j \text{ s.t. } v_j \in D\} | Y_b^n, \tilde{X}_A^n, X_T^n, X_S^n) \\
&\stackrel{(iii)}{\leq} \frac{n|D|}{2} \log(2\pi e \kappa) \\
&\quad - h(\{N_{c,j}^n - \frac{h_{c,j}}{h_{c,b}} N_{c,b}^n : j \text{ s.t. } v_j \in D\} | Y_b^n, \tilde{X}_A^n, X_T^n, X_S^n) \\
&\stackrel{(iv)}{\leq} \frac{n|D|}{2} \log(2\pi e \kappa) \\
&\quad - h(\{N_{c,j}^n : j \text{ s.t. } v_j \in D\} | N_{c,b}^n, Y_b^n, \tilde{X}_A^n, X_T^n, X_S^n) \\
&\stackrel{(v)}{=} \frac{n|D|}{2} \log(2\pi e \kappa) - h(\{N_{c,j}^n : j \text{ s.t. } v_j \in D\}) \\
&= n \left(\frac{|D|}{2} \log(2\pi e \kappa) - \sum_{j: v_j \in D} \frac{1}{2} \log \left(\frac{2\pi e}{|\mathcal{I}(v_j)|} \right) \right),
\end{aligned}$$

where (i) follows from the fact that $Y_b^n - \sum_{v_a \in A} \tilde{X}_{a,b}^n = \tilde{X}_{c,b}^n$; (ii) follows since, for $j = b$, $N_{c,j}^n - \frac{h_{c,j}}{h_{c,b}} N_{c,b}^n = 0$; (iii) follows by letting $\kappa \triangleq 1 + (\max_{e,f \in E} h_e/h_f)^2$; (iv) follows because conditioning reduces entropy and thus we can condition on $N_{c,b}^n$; (v) follows from the fact that, since for $u \in D$ and $w \in T$, $u \not\sim w$, $N_{c,u}^n$ is independent of all the random variables conditioned on.

B. Proof of Lemma 2

Consider the nodes in $\mathcal{I}(v_i^p)$. Assume, by contradiction, that there are no two paths P_{s_1, v_p^i} and P_{s_2, v_p^i} such that $P_{s_1, v_p^i} \cap P_{s_2, v_p^i} = \{v_p^i\}$. Then, we do not have two vertex-disjoint paths starting in $\{s_1, s_2\}$ and ending in $\mathcal{I}(v_i^p)$. From Menger's Theorem, there exists a node v_d whose removal disconnects $\{s_1, s_2\}$ from $\mathcal{I}(v_i^p)$, and thus from v_p^i . The existence of the path P_{s_i, d_i} containing v_p^i guarantees that $v_d \in P_{s_i, d_i}$. Since the removal of v_p^i disconnects s_i from d_i , and the removal of v_d disconnects $\{s_1, s_2\}$ from v_p^i , we conclude that the removal of v_d also disconnects s_i from d_i . But this is a contradiction to the fact that v_p^i was the first such node.

C. Proof of Claim 1

We let $G = (V, E)$ be the graph of our original network, and we construct an extended network $\mathcal{N}$ with graph $G = (V', E')$ in the following way. We let the layers in V' be $V_1, V'_1, V_2, V'_2, \dots, V_r, V'_r$, where V'_j is a copy of V_j , $j = 1, \dots, r$. The edges between V'_j and V_{j+1} , for $j = 1, 2, \dots, r-1$, are the same as the edges between V_j and V_{j+1} in G . To add the edges between V_j and V'_j , for $j = 1, 2, \dots, r$, we simply connect each $v_k \in V_j$ to its copy in V'_j . The source-destination pairs of $\mathcal{N}$ are the same as of $\mathcal{N}$.

Next we claim that if we have an edge $e \in E'$ whose removal from $\mathcal{N}'$ disconnects d_i from both sources and s_i from both destinations, $i \in \{1, 2\}$, then our original network falls in (A). Suppose we have such an edge $e \in E'$. If $e \in V_j \times V'_j$ for some j , then it is easy to see that in the original network, this edge corresponds to a single node in V_j whose removal disconnects d_i from both sources and s_i from both destinations, and we must be in (A). Otherwise, if $e \in V'_j \times V_{j+1}$ for some j , then the removal of the edge $\tilde{e}$ in $V_j \times V'_j$ (or $V_{j+1} \times V'_{j+1}$) which is adjacent to e must also disconnect d_i from both sources and s_i from both terminals. This is because all paths from any source to any destination which contain the nodes in e must also contain the nodes in $\tilde{e}$. Therefore, $\tilde{e}$ can be translated to a node v in $\mathcal{N}$ whose removal disconnects d_i from both sources and d_i from both destinations, and $\mathcal{N}$ falls into case (A).

Therefore, the absence of a node v as described in (A) in our network $\mathcal{N}$ implies that $\mathcal{N}'$ does not contain an edge whose removal disconnects d_i from both sources and s_i from both destinations for some $i \in \{1, 2\}$. Thus, we employ a result for double unicast networks, shown in both [27] and [28], which guarantees that the extended network $\mathcal{N}'$ must contain one of the three structures shown in Figure 4: two edge-disjoint paths P_{s_1, d_1} and P_{s_2, d_2} , a butterfly, or a grail. Moreover, we notice that, in $\mathcal{N}'$, any pair of edge-disjoint paths is also vertex-disjoint, and corresponds to a pair of vertex-disjoint paths in $\mathcal{N}$. Thus, we conclude that if our network $\mathcal{N}$ is not in (A), then it must contain two vertex-disjoint paths P_{s_1, d_1} and P_{s_2, d_2} , a grail structure or a butterfly structure.

REFERENCES

- [1] I. Shomorony and A. S. Avestimehr. Sum degrees-of-freedom of two-unicast wireless networks. *Proceedings of IEEE International Symposium on Information Theory, St. Petersburg, Russia*, 2011.
- [2] L. R. Ford and D. R. Fulkerson. Maximal flow through a network. *Canadian Journal of Mathematics*, 8:399–404, 1956.
- [3] R. Ahlswede, N. Cai, S.-Y. R. Li, and R. W. Yeung. Network information flow. *IEEE Transactions on Information Theory*, 46(4):1204–1216, July 2000.
- [4] S.-Y.R. Li, R. W. Yeung, and N. Cai. Linear network coding. *IEEE Transactions on Information Theory*, 43(2):371–81, February 2003.
- [5] R. Koetter and M. Médard. An algebraic approach to network coding. *IEEE/ACM Trans. Netw.*, 11(5):782–795, 2003.
- [6] A. S. Avestimehr, S. Diggavi, and D. Tse. Wireless network information flow: a deterministic approach. *IEEE Transactions on Information Theory*, 57(4), April 2011.
- [7] Ayfer Ozgur and Suhas Diggavi. Approximately achieving gaussian relay network capacity with lattice codes. *ISIT Proceedings*, 2010.
- [8] S. H. Lim, Y.-H. Kim, A. El Gamal, and S.-Y. Chung. Noisy network coding. *IEEE Information Theory Workshop (ITW)*, 2010.
- [9] A. S. Motahari and A. K. Khandani. Capacity bounds for the Gaussian interference channel. *IEEE Transactions on Information Theory*, 55(2):620–643, February 2009.
- [10] X. Shang, G. Kramer, and B. Chen. A new outer bound and the noisy-interference sum-rate capacity for Gaussian interference channels. *IEEE Transactions on Information Theory*, 55(2):689–699, February 2009.
- [11] V. S. Annapureddy and V. V. Veeravalli. Gaussian interference networks: Sum capacity in the low-interference regime and new outer bounds on the capacity region. *IEEE Transactions on Information Theory*, 55(7):3032–3050, July 2009.
- [12] S. Sridharan, A. Jafarian, S. Vishwanath, and S. A. Jafar. Capacity of symmetric k-user gaussian very strong interference channels. *IEEE Global Telecommunications Conference*, 2008.
- [13] A. El Gamal and M. Costa. The capacity region of a class of deterministic interference channels. *IEEE Transactions on information Theory*, 28(2):343–346, March 1982.
- [14] H. Sato. The capacity of the Gaussian interference channel under strong interference. *IEEE Trans. on Info. Theory*, 27:786–788, November 1981.
- [15] A. B. Carleial. Interference channels. *IEEE Trans. on Info. Theory*, 24:60–70, January 1978.
- [16] R. Etkin, D. Tse, and H. Wang. Gaussian interference channel capacity to within one bit. *IEEE Transactions on Information Theory*, 54(12):5534–5562, December 2008.
- [17] G. Bresler, A. Parekh, and D. Tse. The approximate capacity of the many-to-one and one-to-many Gaussian interference channels. *Proc. of Allerton Conference 2007, Urbana, IL*, September 26–28 2007.
- [18] Guy Bresler and David Tse. The two-user gaussian interference channel: a deterministic view. *European Transactions on Telecommunications*, 19(4):333–354, June 2008.
- [19] V.R. Cadambe and S.A. Jafar. Interference alignment and spatial degrees of freedom for the k user interference channel. *IEEE International Conference on Communications (ICC)*, pages 971–975, 2008.
- [20] R. Etkin and D. Tse. Degrees of freedom in underspread mimo fading channels. *IEEE Transactions on Info. Theory*, 52:1576–1608, April 2006.
- [21] S.A. Jafar and S. Shamai (Shitz). Degrees of freedom region for the mimo x channel. *IEEE Transactions on Info. Theory*, 54(1):151–170, January 2008.
- [22] A. S. Motahari, S. O. Gharan, and A. K. Khandani. Real interference alignment with real numbers. *Submitted to IEEE Transactions on Information Theory*, 2009.
- [23] M. A. Maddah-Ali, S. A. Motahari, and Amir K. Khandani. Communication over mimo x channels: Interference alignment, decomposition, and performance analysis. *IEEE Transactions on Information Theory*, 54(8):3457–3470, August 2008.
- [24] S. A. Jafar and M. Fakhreddin. Degrees of freedom for the mimo interference channel. *IEEE Transactions on Info. Theory*, 53(7):2637–2642, July 2007.
- [25] T. C. Hu. Multi-commodity network flows. *Operations Research*, 11(3):344–360, 1963.
- [26] C. C. Wang and N. B. Shroff. Beyond the butterfly: A graph-theoretic characterization of the feasibility of network coding with two simple unicast sessions. *In Proc. IEEE International Symposium on Information Theory*, 2007.
- [27] S. Shenvi and B. K. Dey. A simple necessary and sufficient condition for the double unicast problem. *In Proceedings of ICC*, 2010.
- [28] K. Cai, K. B. Letaief, P. Fam, and R. Feng. On the solvability of 2-pair unicast networks — a cut-based characterization. *ArXiv*, 2010.
- [29] S. Mohajer, S. N. Diggavi, C. Fragouli, and D.N.C. Tse. Approximate capacity of gaussian interference-relay networks with weak cross links. *ArXiv*, 2010.
- [30] T. Gou, S.A. Jafar, S.-W. Jeon, and S.-Y. Chung. Aligned interference neutralization and the degrees of freedom of the $2 \times 2 \times 2$ interference channel. *ArXiv*, 2010.
- [31] C. Wang, T. Gou, and S. A. Jafar. Multiple unicast capacity of 2-source 2-sink networks. *IEEE Global Telecommunications Conference*, 2011.